

[Manuals.plus](#) /

› [SARTODOORS](#) /

› SARTODOORS Lucia 22 Matte White Sliding Closet Bypass Doors 56 x 80 Instruction Manual

SARTODOORS 1422

SARTODOORS Lucia 22 Matte White Sliding Closet Bypass Doors 56 x 80 Instruction Manual

Model: 1422 | Brand: SARTODOORS

INTRODUCTION

This manual provides comprehensive instructions for the safe and efficient installation, operation, and maintenance of your SARTODOORS Lucia 22 Matte White Sliding Closet Bypass Doors. Please read all instructions carefully before beginning installation to ensure proper function and longevity of your product. Retain this manual for future reference.



Image: Two SARTODOORS Lucia 22 Matte White sliding closet bypass doors, closed, featuring frosted opaque glass panels and matte white wooden frames. The doors have circular pulls.

PRODUCT OVERVIEW

Components Included:

- Two (2) door slabs (28"x80" each)
- Two (2) aluminum tracks

- Four (4) door hangers with wheels
- Two (2) floor guides
- Two (2) door stops
- Two (2) round pulls
- All necessary mounting screws

The doors are constructed from solid pine wood, covered with an eco-veneer finish. They feature frosted opaque glass panels. The door thickness is 1 9/16 inches. The solid composite wood construction contributes to sound attenuation, offering approximately 30% noise reduction compared to standard doors.



SET | INCLUDES:



Image: A detailed view of the SARTODOORS bypass door hardware kit, including two aluminum tracks, four door hangers with wheels, two

round pulls, a wrench, and various mounting screws.

SETUP AND INSTALLATION

Pre-Installation Notes:

- Ensure the opening height accommodates the top mount hardware, which requires an additional 2 1/2 inches above the door height.
- Doors are not pre-drilled for hardware. Drilling will be required during installation.
- The recommended opening width for this 56" x 80" door set (two 28"x80" doors) is 55 inches.
- Doors can be trimmed by 3/4 inch on the top, bottom, left, and right sides if necessary for a custom fit.

Installation Steps:

1. **Prepare the Opening:** Measure your door opening to confirm it meets the required dimensions, including the extra 2 1/2 inches for hardware clearance.
2. **Install Tracks:** Securely mount the aluminum tracks above the door opening. Refer to the hardware diagram for proper orientation and spacing.
3. **Attach Hangers to Doors:** Drill holes and attach the four door hangers to the top edge of each door slab. Ensure they are evenly spaced and securely fastened.
4. **Mount Doors:** Carefully lift each door and engage the hangers with the tracks. The top-hung hardware ensures all door weight is suspended from the track.
5. **Install Floor Guides:** Position and secure the floor guides to prevent the doors from swinging. These guides accommodate various door thicknesses.
6. **Install Door Stops:** Place the door stops at the desired positions along the track to limit the door's travel.
7. **Attach Pulls:** Drill holes and install the round pulls on the door faces at a comfortable height.
8. **Adjust Doors:** Utilize the height-adjustable ball bearing door hangers to fine-tune the door height and ensure smooth operation.

111SD Sliding Bypass Door Hardware

For Door Weighing up to 150lbs./68kg. Each



Height Adjustable Ball Bearing
Door Hanger with Quick Release Clip

Precision Extruded
Jump Proof Box Track

Top-Hung Hardware, All Door Weight
is Suspended from the Track



Adjustable Door Guide Accomodate Various Door Thicknesses

Image: A technical diagram illustrating the Johnson Hardware 111SD Sliding Bypass Door Hardware. It shows the top-hung track, height-adjustable ball bearing door hangers with quick release clips, precision extruded jump-proof box track, and adjustable door guides. The diagram indicates the hardware supports doors up to 150 lbs/68 kg.

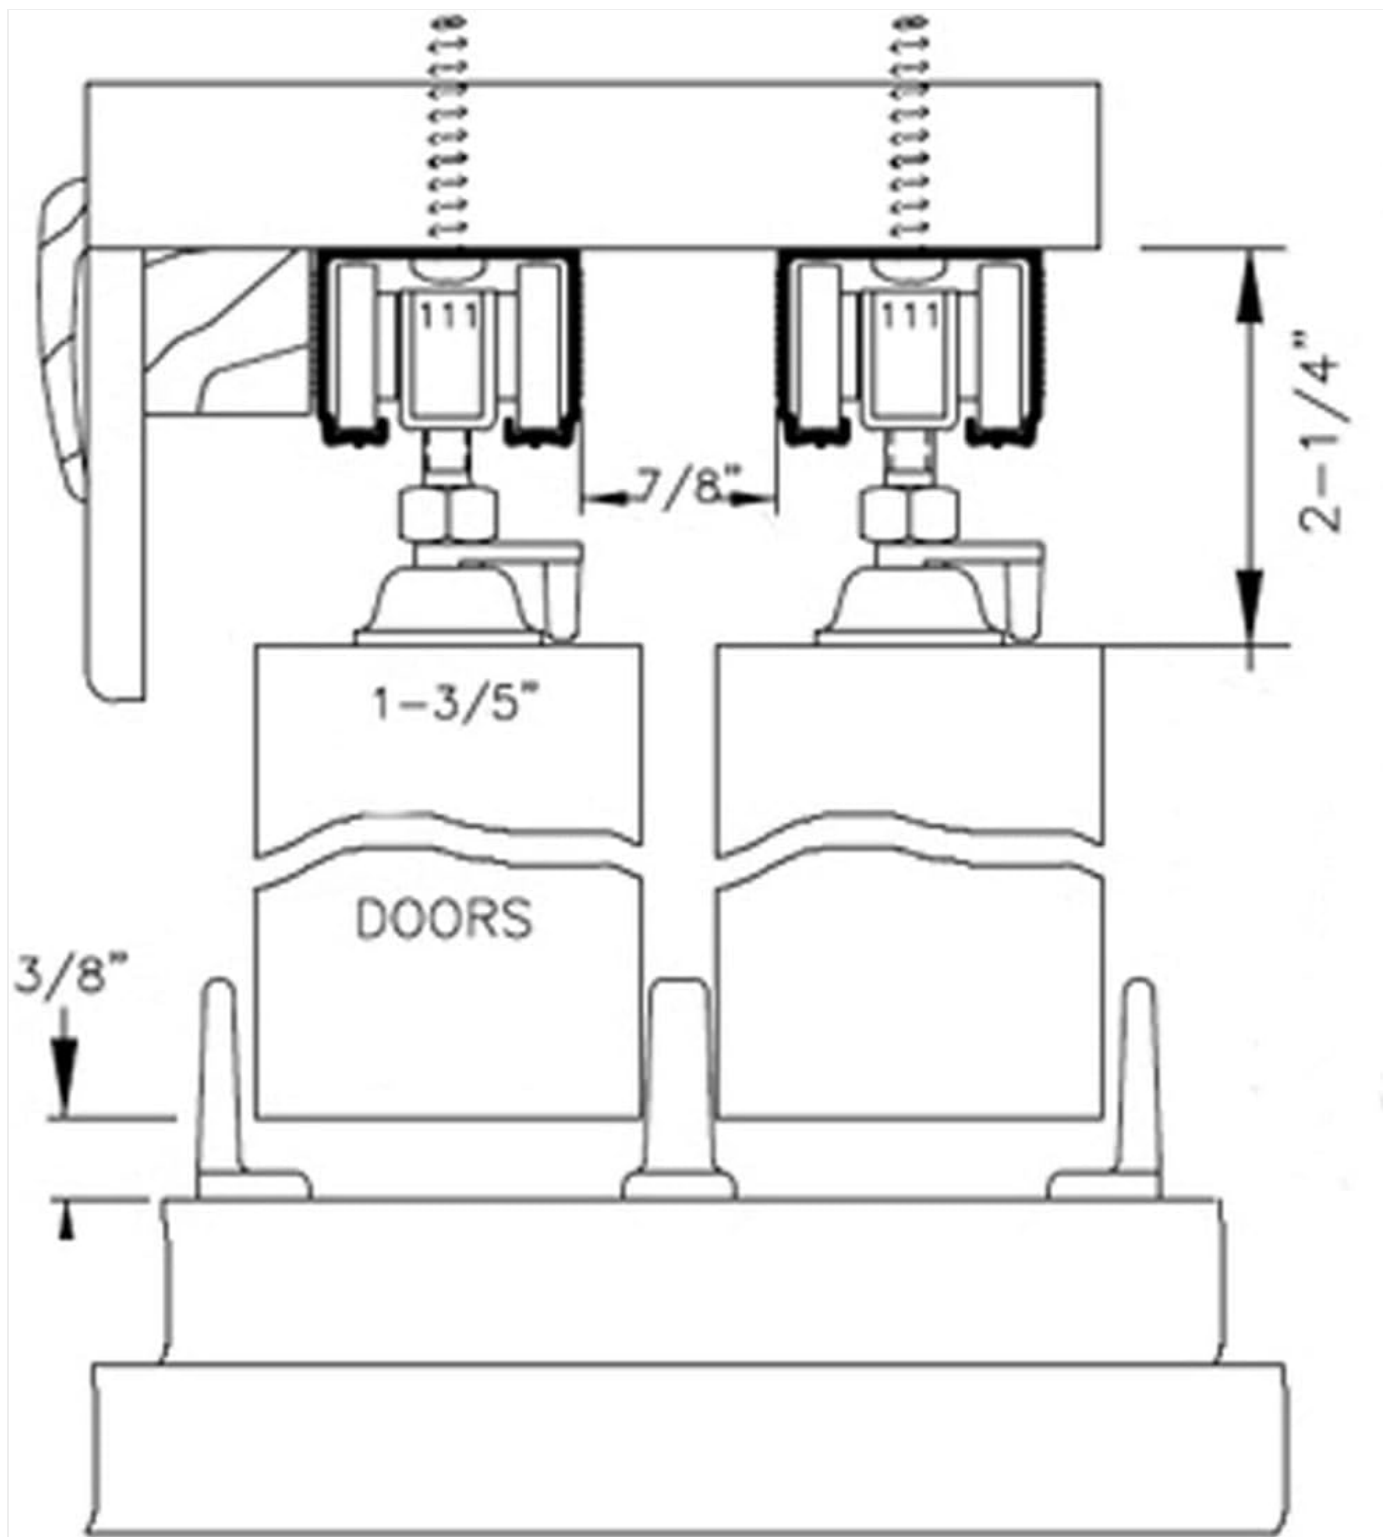


Image: A diagram showing the recommended opening dimensions for the bypass doors. It illustrates two 28-inch wide doors, totaling an opening width of 55 inches, and a door height of 80 inches within an 83-inch opening height.

OPERATING INSTRUCTIONS

The SARTODOORS Lucia 22 bypass doors operate by sliding smoothly along the top-mounted tracks. To open, gently push one door to slide it behind the other. To close, pull the door back into its original position. The bypass design allows full access to the closet space by stacking the doors neatly behind each other. Avoid forcing the doors if they encounter resistance; inspect the tracks and rollers for any obstructions.



Image: SARTODOORS Lucia 22 bypass doors partially open, revealing a closet interior with clothes hanging. The doors are matte white with frosted glass panels, demonstrating their sliding functionality.

MAINTENANCE

- **Cleaning:** Clean the door surfaces and glass panels with a soft, damp cloth. Avoid abrasive cleaners or harsh chemicals that could damage the eco-veneer finish or glass.
- **Track Maintenance:** Periodically inspect the tracks for dust, debris, or obstructions. Clean the tracks with a vacuum or a damp cloth to ensure smooth sliding operation.
- **Hardware Check:** Annually check all screws and hardware components for tightness. Tighten any loose fasteners to maintain stability and prevent wear.
- **Lubrication:** If the doors do not slide smoothly, a silicone-based lubricant can be applied sparingly to the rollers and tracks.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Doors stick or are difficult to slide.	Debris in track, worn rollers, misaligned track.	Clean tracks, inspect and replace rollers if worn, check track alignment and adjust if necessary.

Problem	Possible Cause	Solution
Doors do not close completely or leave a gap.	Misaligned doors, incorrect door stop placement.	Adjust door height using hangers, reposition door stops.
Doors wobble or feel unstable.	Loose hardware, improper installation of floor guides.	Tighten all mounting screws, ensure floor guides are securely fastened and correctly positioned.

SPECIFICATIONS

Brand: SARTODOORS

Model: 1422 (Lucia 22)

Door Dimensions (each): 28" W x 80" H

Overall Opening Size (recommended): 55" W x 83" H (requires 2.5" extra height for hardware)

Color: Matte White

Material: Solid Pine Wood with Eco-Veneer finish, Frosted Opaque Glass

Door Thickness: 1 9/16"

Item Weight: Approximately 90 pounds (total for set)

Assembly Required: Yes

Sound Attenuation: Approximately 30% noise reduction over standard doors

UPC: 798418857520

WARRANTY AND SUPPORT

For warranty information or technical support regarding your SARTODOORS Lucia 22 Sliding Closet Bypass Doors, please contact SARTODOORS directly. Refer to your purchase documentation or the official SARTODOORS website for contact details. Ensure you have your model number (1422) and purchase date available when contacting support.

