



ilight Plexineon Vertical Catenary Dynamic Color Instruction Manual

[Home](#) » [ILIGHT](#) » iLight Plexineon Vertical Catenary Dynamic Color Instruction Manual 



Plexineon Vertical Catenary Dynamic Color Instruction Manual





REV0.1 10252022

Contents

- [1 Plexineon Vertical Catenary Dynamic Color](#)
- [2 Install Fixtures into Mounting Clips](#)
- [3 RGB&RGBW WIRING DIAGRAM](#)
- [4 OPERATING GUIDE](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)

Plexineon Vertical Catenary Dynamic Color

Installation Instructions – Plexineon Vertical Catenary Dynamic Color

Models: Plexineon Vertical Rings Catenary Mount Dynamic Color


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS
5. CATENARY MOUNT ONLY


NOTE: Prior to installation all 24VDC wires must be present within 72" of the installation. Refer to the power supply installation instruction for additional information.

NOTE: More than one person is recommended for this installation.

NOTE: This step is only for multi-piece frames. If you have single piece frame, skip to step 2.1.

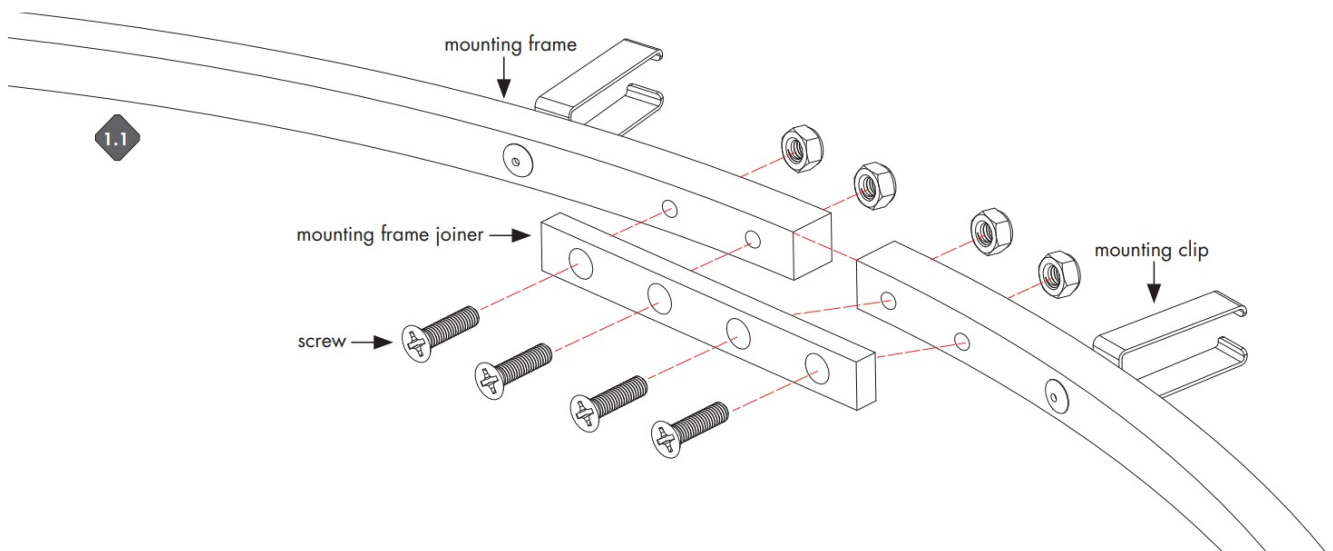


1.1 For multi-piece frames, connect the frame members together with mounting frame joiner.

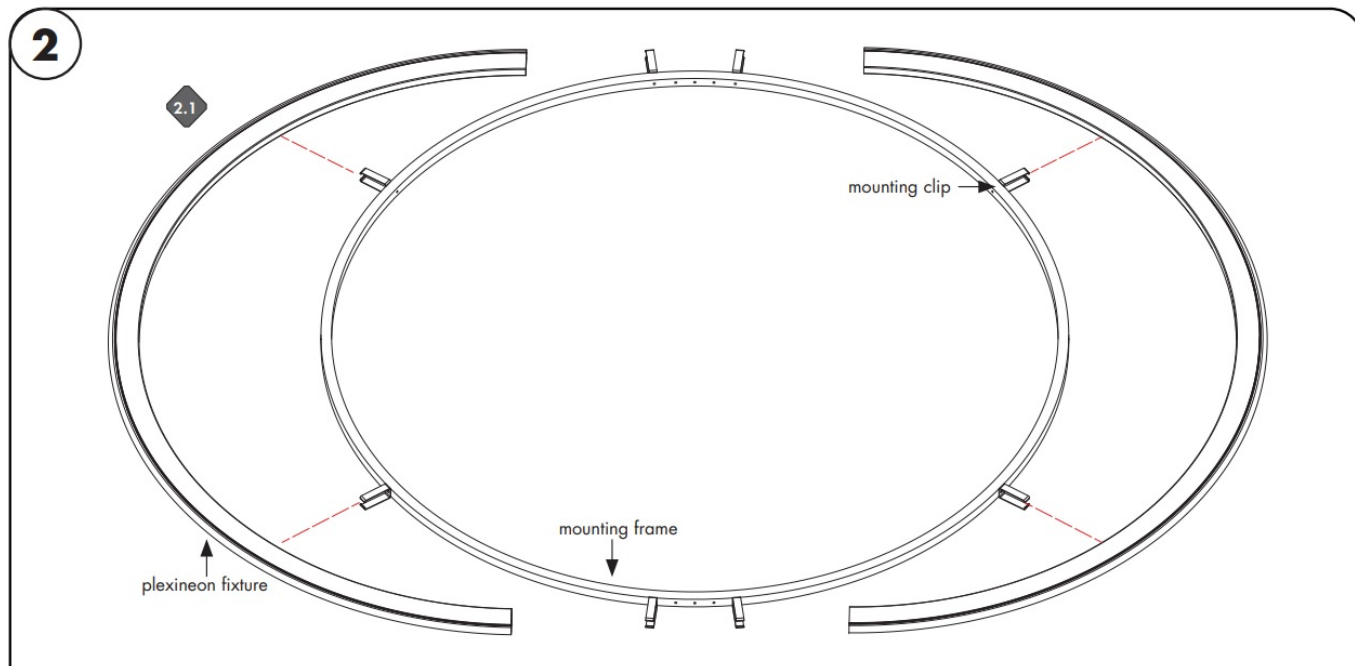


2.1 Install plexineon fixture to mounting clips on mounting frame(s).

Install Fixtures into Mounting Clips

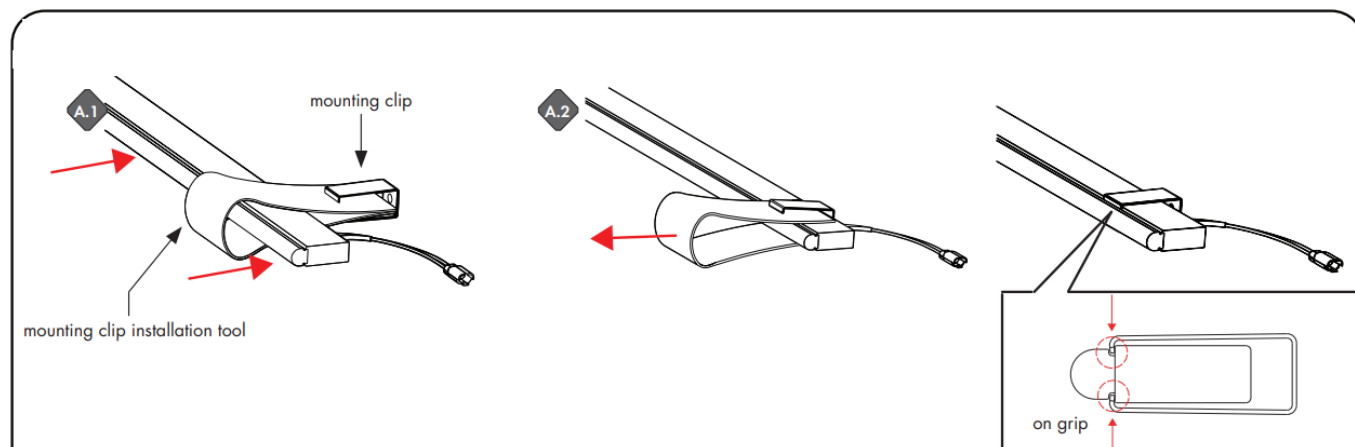


A.1 Make an U shape with mounting clip installation tool, insert two edges into mounting clip. Place plexineon fixture inside the shape. Then push the fixture into clip.

A.2 Remove the tool. Make sure mounting clip is clipped right on the grip.

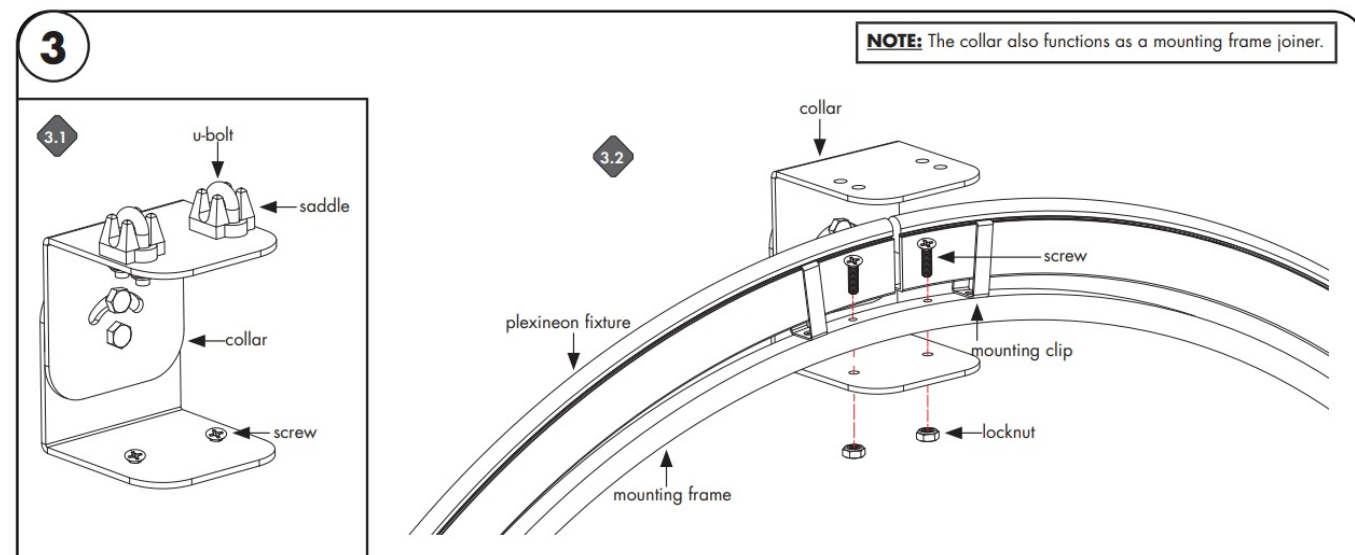

3.1 Remove screw, u-bolt, saddle, and locknut from collar.

3.2 Connect collar with mounting frame by screws. Use locknut to secure collar.

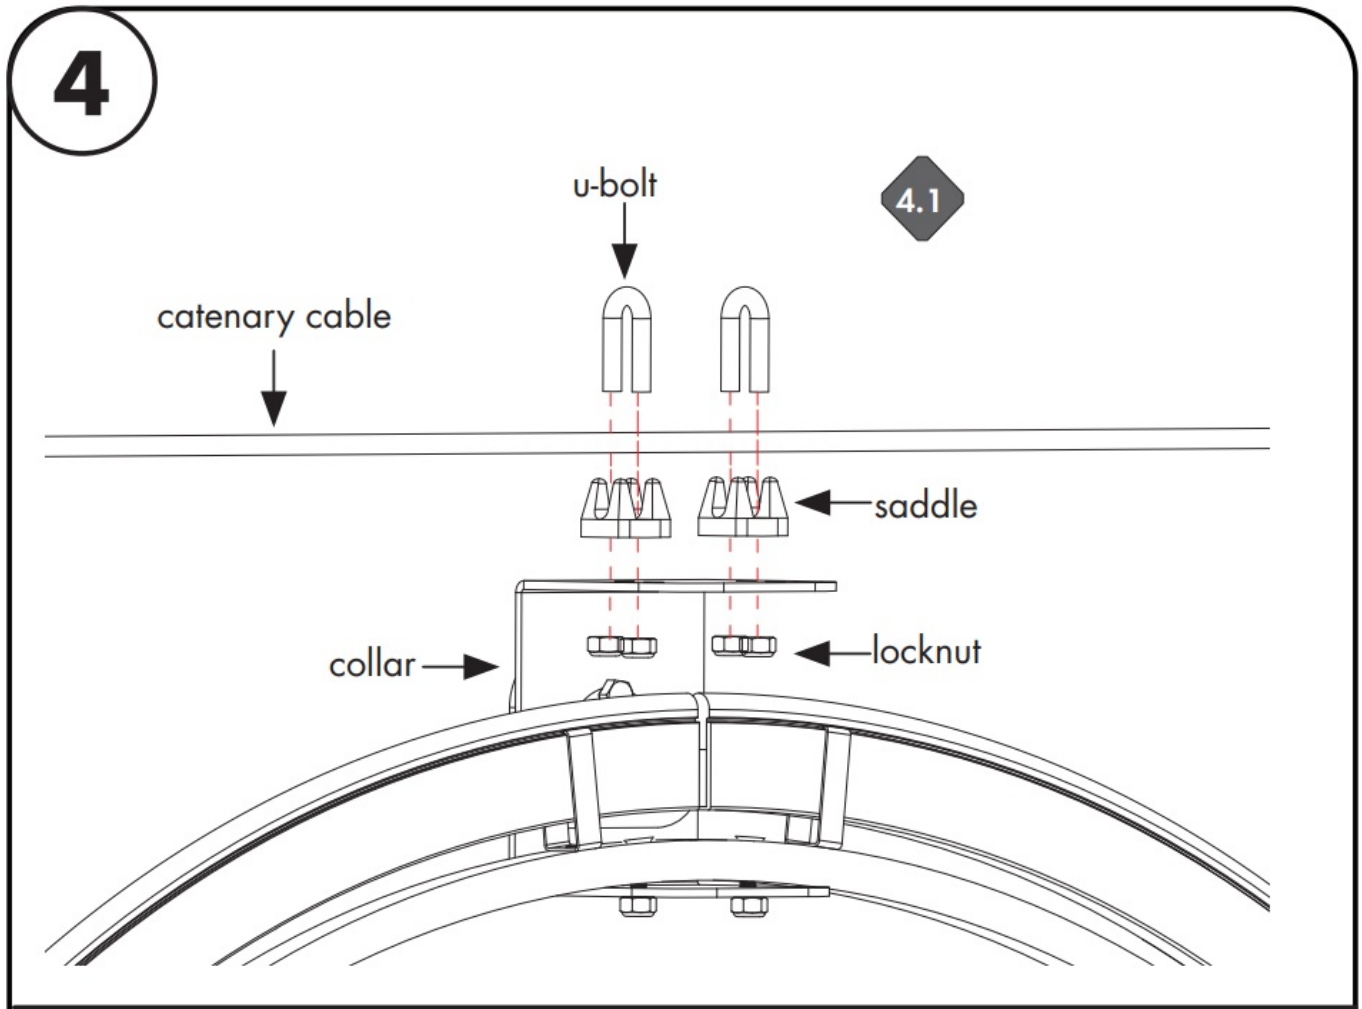

NOTE: Catenary cables are provided by others. Max Ø1/4".

4.1 Place the catenary cable between the saddle and u-bolt. Use locknuts to clamp the catenary cable between the saddle and u-bolt.



5

catenary cable


collar

locknut


5.1



0°




30°



45°

5.1 Loosen the top locknut on back of the collar to adjust the angle of plexineon fixture.

RGB&RGBW WIRING DIAGRAM

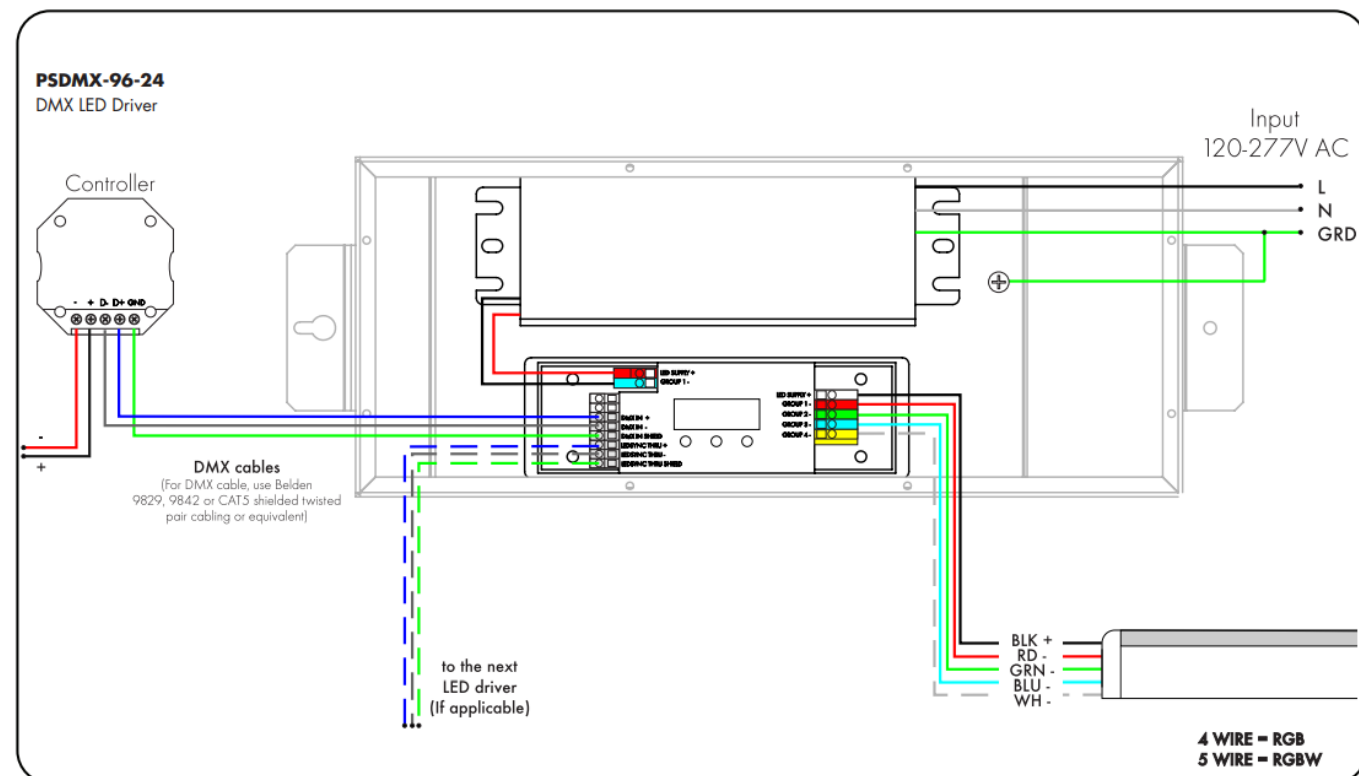


WIRING DIAGRAM SR-DMX-SPI

Smart Pixel LineLED Decoder

NOTE: Please make sure that power is turned off before wiring. Also, ensure that the correct power supply (voltage and wattage) is used to power the LED strips connected to the decoder. Follow illustrated wiring diagram. Use screwdriver to open and close connection slots.

NOTE: When connecting two or more LED strip lights or light fixtures, always make sure the signal direction arrows are pointing to same direction

The signal direction arrow should appear on label of each section of LED fixture.

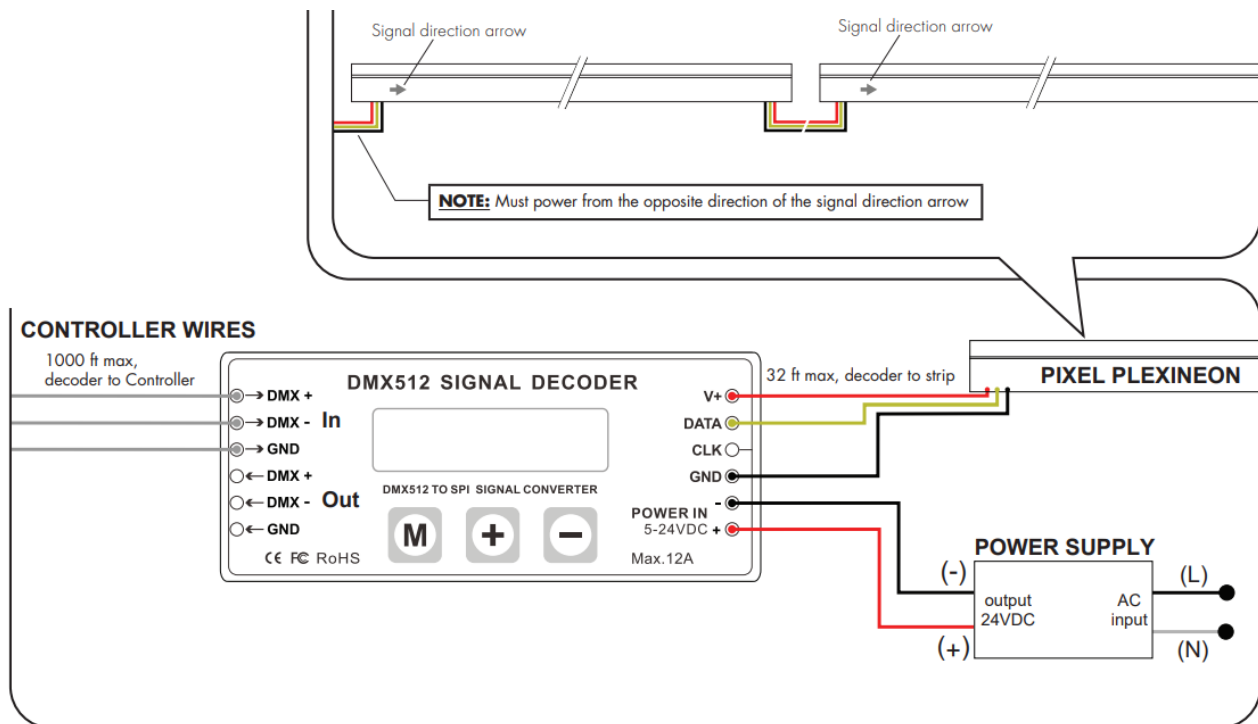

OPERATING GUIDE

SR-DMX-SPI

Smart Pixel LineLED Decoder

There are three buttons on the decoder.



Parameter Setting



Increase Value



Decrease Value

After operation, if no action was taken within 30s, the button lock, and backlight of the screen will turn off.

1. Long press M button for 5s to unlock the buttons, and the backlight will turn on.
2. Long press M button for 5s to switch between test mode and decode mode after unlocked.

During test mode, the first line of LCD will show: TEST MODE. Use test mode to verify RGBW Pixel functionality. During decoder mode, the first line of LCD shows: DECODER MODE. Use decoder mode when connecting to a Controller and for final installation and customization.

The second line of the LCD Display shows the current setting and value. Note: 1 Pixel = 1 Cut Increment

NOTE: When connected to a controller, DMX512 Signal Decoder will stay in "Decoder Mode".

MODE TABLE.

| SETTING | LCD DISPLAY | VALUE RANGE | DESCRIPTION |
|---------------------------|---------------------------|--------------------------|--|
| Built-in Programs | TEST MODE MODE NO.: | 1-26 | See Program Table below |
| Program Speed | TEST MODE RUN SPEED: | 0-7 | 0: fast, 7: slow |
| DMX Address | DECODER MODE DMX ADDRESS: | 1-512 | Address of the starting point/Pixel of a program |
| DMX Signal RGB | DEE)C01:11RalsOSE MX | RGB, BGR, etc. | N/A |
| Pixel Quantity | DECODER MODE PIXEL QTY: | 1-170(RGB), 1-128 (RGBW) | Number of Pixels to follow a program |
| IC TYPE | DECODER MODE IC TYPE: | 2903, 8903, 2904, 8904 | 2903: N/A, 2904: for RGBW, 8903: N/A, 8904: N/A |
| Color | DECODER MODE COLOR: | MONO, DUAL, RGB, RGBW | MONO: N/A, DUAL: N/A, RGB: N/A, RGBW: for RGBW |
| Pixel Merging /Pixel Size | DECODER MODE PIXEL MERGE: | 1-100 | Number of Pixels to merge together |
| RGB Sequence | DECODER MODE LED RGB SEQ: | RGBW, BGRW, etc. | Sequence of RGBW, 24 possible combinations |
| Integral Control | DECODER MODE ALL CONTROL: | YES, NO | Yes: Merge all Pixels No: Maintain individual Pixels or Merged Pixels |
| Reverse Control | DECODER MODE REV-CONTROL: | YES, NO | Reverse program order |
| Overall Brightness | DECODER MODE BRIGHTNESS: | 1-100 | 1: dimmest setting 100: brightest setting |

NOTE:

When connected to a controller, DMX512 Signal Decoder will stay in “Decoder Mode”.

NOTE:

The actual maximum control pixels of the controller are 1360 (2903) ,1024 (2904). Please set the pixel and pixel combination value according to the actual situation, and DO NOT exceed the maximum.

NOTE: For Program Table

Change: no fading/dimming between color changes

Fade: fade/dim between color changes Chase: change pixel by pixel

Chase with Trail: change pixel by pixel with fading between


PROGRAM TABLE

| PROGRAM NO. | PROGRAM DESCRIPTION |
|-------------|-------------------------------------|
| 1 | Solid color: Red |
| 2 | Solid color: Green |
| 3 | Solid color: Blue |
| 4 | Solid color: Yellow |
| 5 | Solid color: Purple |
| 6 | Solid color: Cyan |
| 7 | Solid color: White |
| 8 | RGB change |
| 9 | Full color change |
| 10 | RGB fading |
| 11 | Full color fading |
| 12 | Red chase with trail |
| 13 | Green chase with trail |
| 14 | Blue chase with trail |
| 15 | White chase with trail |
| 16 | RGB chase with trail |
| 17 | Rainbow chase with trail |
| 18 | RGB chasing and fading |
| 19 | Red chasing green, chasing blue |
| 20 | Orange chasing purple, chasing cyan |
| 21 | Rainbow chase (7 colors) |
| 22 | Random twinkle: white over red |
| 23 | Random twinkle: white over green |
| 24 | Random twinkle: white over blue |
| 25 | White fading |
| 26 | Off |

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE



Documents / Resources

| | |
|---|--|
|  | <p>ilight Plexineon Vertical Catenary Dynamic Color [pdf] Instruction Manual Plexineon Vertical Catenary Dynamic Color, Plexineon, Plexineon Dynamic Color, Vertical Catenary Dynamic Color, Catenary Dynamic Color, Vertical Dynamic Color, Dynamic Color</p> |
|---|--|

References

-  [Home - Luminii](#)

Manuals+.