



immax 07505L Neo Smart Keypad User Manual

[Home](#) » [immax](#) » immax 07505L Neo Smart Keypad User Manual 



**Manufacturer and importer:**

IMMAX, Pohoří 703, 742 85 Vřesina, EU | www.immaxneo.cz | www.immaxneo.com

Made in P.R.C.


Contents

- 1 PACKAGE CONTENTS**
- 2 DESCRIPTION**
- 3 SPECIFICATIONS**
- 4 BASIC INFORMATION**
- 5 PAIRING WITH THE IMMAX NEO PRO SMART GATEWAY**
- 6 SYSTEM SETTINGS**
- 7 INSTALLATION**
- 8 Documents / Resources**
 - 8.1 References**
- 9 Related Posts**

PACKAGE CONTENTS

- 1 x Zigbee keyboard
- 3 x AAA 1.5 V batteries
- 1 x User's Guide
- 4 x screws

DESCRIPTION

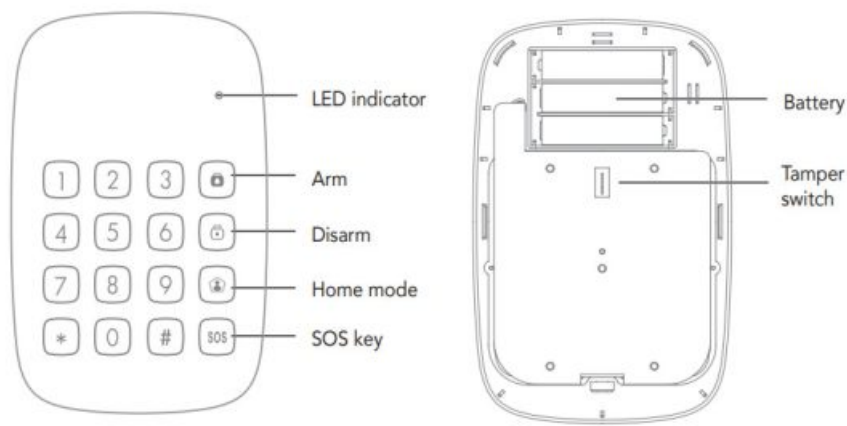

SPECIFICATIONS

Power supply: DC 4.5 V (AAA 1.5 V battery x3)
 Zigbee communication protocol: 3.0
 Frequency: 2,400-2,483 GHz
 Antenna: built-in PCB antenna
 Wireless range: 30 m direct visibility, 10 m in a built-up area
 Static current: max. 100 μ A
 Operating current: max. 30 mA
 Material: ABS plastic
 Operating temperature: -0 ° C to + 55 ° C
 Operating humidity: maximum 80% (no condensation)
 Degree of protection: IP20
 Dimensions: 135x90x15mm

BASIC INFORMATION

System power on: User/administrator code + Out of mode button
 System deactivation: User/administrator code + Deactivate button
 Home mode: User/administrator code + Home mode button
 Emergency call: User/administrator code + SOS button
 Default administrator code: 123456
 Default user code: 1234

PAIRING WITH THE IMMAX NEO PRO SMART GATEWAY

Download the Immax NEO PRO app from Google Play or the Apple store.
 Set your Immax NEO PRO gateway to "Add sub-device"
 Switch the keypad to setting mode: enter the administrator code and confirm #. The LED will light up.
 Enter the Zigbee network configuration code on the keypad: 4210 #, the LED will start flashing. If an audible signal sounds, the keypad is successfully paired with the smart gateway.

SYSTEM SETTINGS

Setting mode: Admin code + #
 To exit the setting mode: briefly press the Deactivate button

To turn on / off the beep when a button is pressed:
 Power on: 3210 #
 Power off: 3211 #

Enable/disable security on delay:

Power on: 3310 #

Power off: 3311 #

Delay time setting: 34 + delay time (0 – 180) + #

Enable/disable SOS Quick Launch:

Power on: 3510 #

Power off: 3511 #

Enable/disable Quick Off mode Off:

Power on: 3610 #

Power off: 3611 #

Activating / deactivating the quick deactivation mode Deactivation:

Power on: 3710 #

Power off: 3711 #

User code change 1: 38 + 4-digit numeric code + #

User code change 2: 50 + 4-digit numeric code + #

User code change 3: 51 + 4-digit numeric code + #

Change user code 4: 52 + 4-digit numeric code + #

User code change 5: 53 + 4-digit numeric code + #

User code change 6: 54 + 4-digit numeric code + #

User code change 7: 55 + 4-digit numeric code + #

User code change 8: 56 + 4-digit numeric code + #

User code change 9: 57 + 4-digit numeric code + #

User code change 10: 58 + 4-digit numeric code + #

Administrator code change: 39 + 6-digit numeric code + #

Enable/disable pairing mode to ZigBee network:

Power on: 4210 #

Off: 4211 #

Keyboard reset: 987654321 + #

Note: If you turn on the option to quickly start the SOS mode, Outside,

In deactivation, it is not necessary to enter the user code.

You can also set all these functions in the Immax NEO PRO application.

INSTALLATION

Before installing the keyboard on the wall, make sure that there is good signal coverage from the Zigbee gate (Immax NEO PRO) at the installation site.

Step 1: Unscrew the captive screw and remove the keyboard back cover

Step 2: Screw the keyboard back cover to the selected location

Step 3: Put the keyboard back on the back cover and secure it with the locking screw.

IMAX NEO PRO APPLICATION


Download the Immax NEO PRO app from Google Play or the Apple store.



<https://smartapp.tuya.com/immaxneosmart>



Documents / Resources



[immax 07505L Neo Smart Keypad](#) [pdf] User Manual
07505L, Neo Smart Keypad, 07505L Neo Smart Keypad

References

- [Velkoobchod s LED technikou IMMAX | Immax.cz](#)
- [Velkoobchod s LED technikou IMMAX | Immax.cz](#)