


inateck®
KB01105 Keyboard



inateck KB01105 Keyboard Instruction Manual

[Home](#) » [inateck](#) » inateck KB01105 Keyboard Instruction Manual 

Contents


- [1 inateck KB01105 Keyboard](#)
- [2 Product Diagram](#)
- [3 Bluetooth Pairing](#)
- [4 Shortcut Keys](#)
- [5 LED Indicator](#)
- [6 Charging](#)
- [7 Product Specification](#)
- [8 Packing List](#)
- [9 FCC Note](#)
- [10 Battery Safety Warning](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

inateck®

inateck KB01105 Keyboard



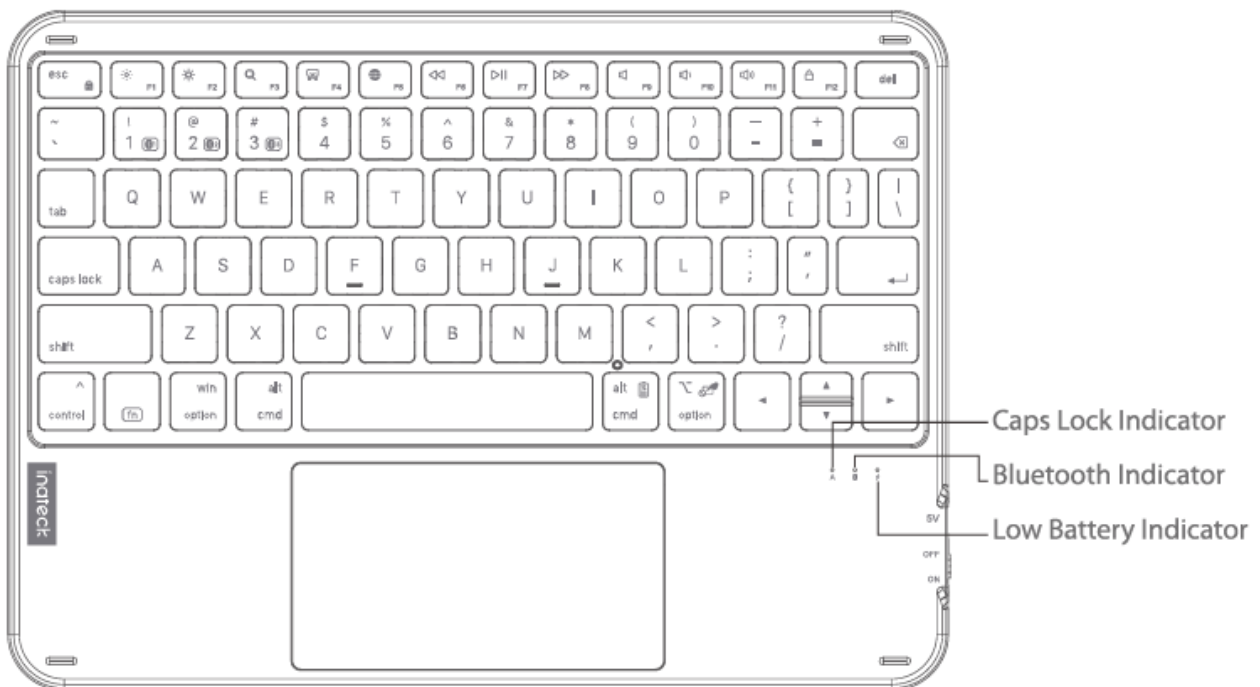

Product Diagram



Power Switch Charging Port



Bluetooth Pairing

- **Step 1:** For the first use, slide the power switch to the On position and then KB01105 will automatically enter Bluetooth Channel 1 pairing mode. To enter the Bluetooth pairing mode, you can also hold  + 

simultaneously.



- **Step 2:** On your iPad or Windows devices, turn on Bluetooth and then “Inateck KB01105” will show up in available devices list.

On Windows 11, go to Settings-Bluetooth and Other Devices-Turn on the Bluetooth—Add Devices—Bluetooth to find “Inateck KB01105” on the list.

On iPad OS 18, go to Settings—Bluetooth—Turn on Bluetooth to find “Inateck KB01105” on the list.

- **Step 3:** Tap “Inateck KB01105” to pair it with your device and then the Bluetooth indicator will stay on in Blue, which means that Bluetooth pairing is completed.

Fix Bluetooth Pairing Problems



- **Step 1:** Go to Bluetooth page, find “Inateck KB01105” in paired devices list and delete the previous pairing record. If there are multiple pairing records, please delete them all.
- **Step 2:** Hold  +  simultaneously for seconds seconds and then the three indicators will blink times times once the factory reset is completed.
- **Step 3:** Turn off Bluetooth on your device and turn it back on. Then, pair it with your Inateck KB01105.

Shortcut Keys

	Undo		Brightness-		Brightness+
	Search		Take a screenshot		Switch keyboard layout
	Last Track		Play/Pause		Next Track
	Mute		Volume-		Volume+
	Lock		Delete		



Note: The following operations are only applicable to Windows.

How to Use F1-F12

You may press  +  to enable/disable the Fn key lock. (The keyboard disables the Fn key lock by default.)



When the Fn Lock is enabled

Press F1 can trigger the functionality owned by F1 key;



















Press the combination of  +  simultaneously will dim the brightness of the screen.
This method applies to all F Keys (F1-F12).

When the Fn Lock is disabled (Default Status)

Press F1 can dim the brightness of the screen.

Press the combination of  +  simultaneously will trigger the functionality owned by F1 key.

The Combination of Fn and Other Keys



 + 	Enable/Disable Fn Lock
 + 	Check the Battery Level
 + 	Turn on/off Trackpad
 + 	Short press to enter 
	Long press to enter  pairing mode
 + 	Short press to enter 
	Long press to enter  pairing mode
 + 	Short press to enter 
	Long press to enter  pairing mode

LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator	Solid	Caps Lock On
	Off	Caps Lock Off
Bluetooth Indicator	Fast Blinking	Bluetooth Pairing
	Off	Bluetooth Unconnected
	Solid	Bluetooth Connected
	Slow Blinking	Bluetooth Reconnecting
Battery Indicator	Flash in Red	Battery level<20%
	Solid in Red	Charging
	Solid in Green	Fully charged

Bluetooth Channel	Color
Bluetooth Channel 1	Blue
Bluetooth Channel 2	Orange
Bluetooth Channel 3	Green

Restore Factory Defaults

Hold  +  for 3 seconds and then the five indicators will blink 3 times once the factory reset is completed.



Check Battery Level

Hold simultaneously to check the battery level according to the blinking frequency of the red cmd battery indicator.

Blinkina Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

Charging

When the battery level is under 20%, the red battery indicator will blink. Please use the USB-C cable to charge the keyboard. The keyboard would be fully charged in 2~3 hours. The battery indicator will stay solid in red when the keyboard is charging. Once it's fully charged, the battery indicator will turn green.

Note: This product does not come with a charging cable. Please use your own USB-C cable for charging.

Sleep Mode

When KB01105 is left idle for 30 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

Product Specification

Bluetooth Version	Bluetooth 5.3
Bluetooth Range	10m
Charging Time	2~3h
Continuous Working Time	About 50 h
Operating Temperature	0°C ~+35°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	60±10g
Battery Capacity	500mAh

Packing List

- KB01105 *1
- Instruction Manual *1

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that Interference will not occur in a particular Installation. If this equipment does cause harmful Interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the Interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or in conjunction with any other antenna or transmitter.

EU Declaration of Conformity

Inateck Co, Ltd. hereby declares that this device complies with the Directive 2014/53/EU.

A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/inilleck-euro-compliance>

Battery Safety Warning

- This product contains a built-in rechargeable lithium battery.
- Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire.
- If the battery experiences severe swelling, discontinue use immediately.
- Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water.
- During transportation, do not mix the battery with metallic objects.

Charging Precautions

The power delivered by the charger must be between min [0.05] Watts required by the radio equipment, and max [1.25] Watts in order to achieve the maximum charging speed"

Service Center

Europe

F&M Technology GmbH

Tel: +493415199 8410 (Workingday8AM-4PM CET)

Fax: +49 3415199 8413


Address: Fraunhoferstr. 7, 04178 Leipzig, Deutschland

North America

Inateck Technology Inc.

Tel:+ 1 (909) 698 7018 (Working day 9 AM – 5 PM PST)
Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

Documents / Resources

	inateck KB01105 Keyboard [pdf] Instruction Manual KB01105, KB01105 Keyboard, Keyboard
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.