




inateck KB04111-11 Keyboard Instruction Manual

[Home](#) » [inateck](#) » inateck KB04111-11 Keyboard Instruction Manual 

inateck KB04111-11 Keyboard
Instruction Manual


inateck®

Instruction Manual

KB04111-11 Keyboard



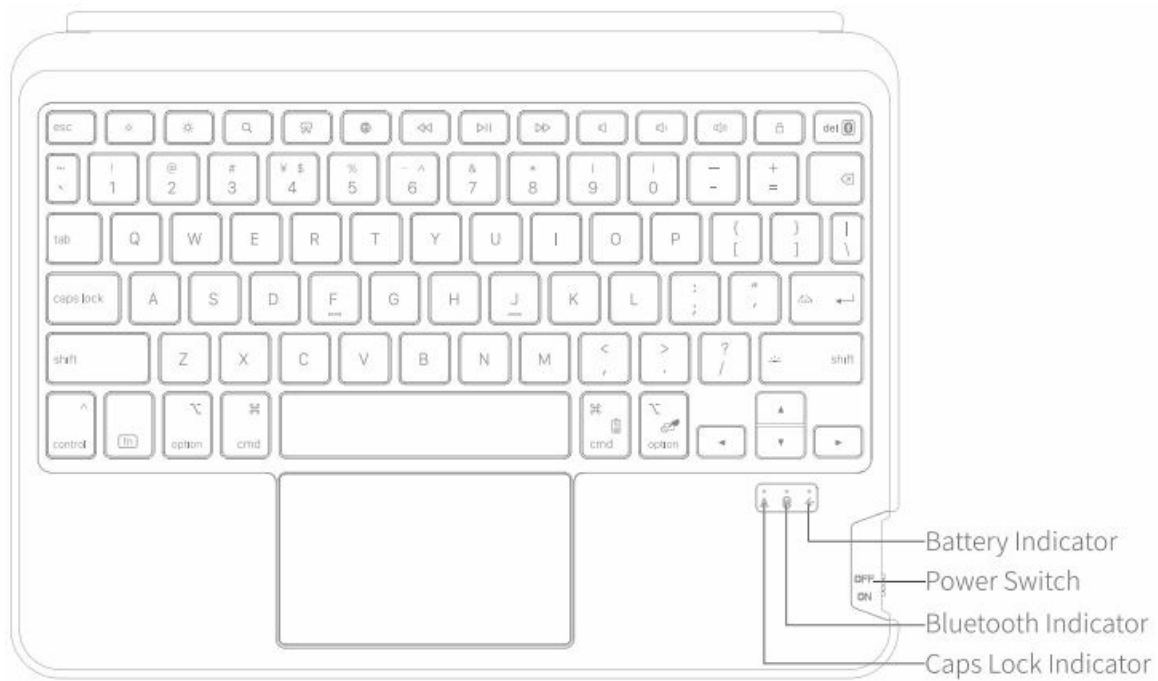

· Product Diagram



Contents

- 1 1. Bluetooth Pairing
- 2 2. Multi-Touch Gestures
- 3 3. Adjust the Keyboard Backlight
- 4 4. Shortcut Keys
- 5 5. LED Indicator
- 6 6. Restore Factory Defaults
- 7 7. Check Battery Level
- 8 8. Charging
- 9 9. Sleep Mode
- 10 10. Product Specification
- 11 11. Packing List
- 12 12. Service Center
- 13 13. Documents / Resources
 - 13.1 References

1. Bluetooth Pairing

Step 1: Put the iPad case on and slide the keyboard switch to the On position. Hold down  +  simultaneously and then the keyboard will enter pairing mode with a blinking blue indicate light.

Step 2: On your iPad, go to Settings> Bluetooth, turn on Bluetooth and then “Inateck KB04111-11” will show up in “Other Devices” .

Step 3: Tap “Inateck KB04111-11” to pair it with your iPad. The Bluetooth indicator will go off in seconds, which means that Bluetooth pairing is completed.

Note:

1. Set Up Your iPad:

For better user experience, please follow steps below to set up your iPad at first use once Bluetooth pairing is completed.

Go to Settings> General> Trackpad and drag the slider to the middle of the tracking speed.

Go to Settings > General > Trackpad and turn on “Tap to Click” and “Two Finger Secondary Click” •

Go to Settings> Accessibility> Touch and turn off AssistiveTouch.

Go to Settings> General> Gestures and enable the toggle for the “Four and Five Finger Swipe” setting.

Optional Settings

Steps to stop Caps Lock changing your keyboard language:



Go to Settings> General> Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock.

Steps to disable the double tap period shortcut:

Go to Settings> General > Keyboard > Hardware Keyboard and click the switch to turn on Shortcut.




2. Fix Bluetooth Pairing Problems:

Step 1: Go to Settings> Bluetooth, find “Inateck KB04111-11” in My Devices and tap the info button (D next to it, then tap “Forget This Device” . If there are multiple pairing records related to the keyboard, please clear all of them.





Step 2: Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed.

Step 3: Pair your Inateck KB04111-11 with your iPad.

2. Multi-Touch Gestures










	Drag: Click and hold the item until it lifts up and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.
	Secondary click: Click or tap with two fingers.		Show desktop: Swipe up with three fingers.
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

3.Adjust the Keyboard Backlight





- 1) Hold  +  simultaneously to adjust the backlight color. 7 colors are available in total.
- 2) Hold  +  simultaneously to adjust the backlight brightness. 3 levels are at your choice.

4.Shortcut Keys

1.

	Undo		Brightness-		Brightness+
	Search		Take a screenshot		Switch keyboard layout
	Last track		Play/Pause		Next track
	Mute		Volume-		Volume+
	Lock				



2.Common Keyboard Shortcuts

 + X	Cut	 + C	Copy	 + V	Paste
 + A	Select all	 + Space	Search	control+Space	Switch keyboard layout
 + Tab	Switch between Apps				



5.LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator	Solid	Caps Lock on
	Off	Caps Lock off
Bluetooth Indicator	Blinking	Bluetooth Pairing
	Off	Bluetooth connected or unconnected
Battery Indicator - Red	Blinking	Low battery
	Solid	Charging
Battery Indicator - Green	Solid	Fully charged

6.Restore Factory Defaults

Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed.

7.Check Battery Level

Hold  +  simultaneously to check the battery level according to the blinking frequency of the red battery indicator.

Blinking Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

8.Charging

When the battery level is under 20%, the battery indicator will blink in red. Please recharge the keyboard in time. The recommended charging voltage and current are 5V and 250mA respectively. To recharge the keyboard, you can connect the included USB cable to the charger of your cell phone or the USB port of a computer. The keyboard will be fully charged in 2-3 hours. The indicator will stay in red when the keyboard is charging and turn green when it's fully charged.

9.Sleep Mode

1. When KB04111-II is left idle for 1 minutes, the backlight will turn off.
2. When KB04111-II is left idle for 30 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

Note: Tapping the trackpad cannot wake up the keyboard.

10.Product Specification

Bluetooth Version	Bluetooth 5.3
Bluetooth Range	10 m
Charging Time	2-3h
Operating Time (Backlight on)	About 5h
Operating Time (Backlight off)	About 55h
Operating Temperature	-10°C ~ +55°C
Bluetooth Frequency Range	2402-2480MHZ
Actuation Force	60 ± 10g
Battery Capacity	500mAh

11.Packing List

KB04111-II *1
Charging Cable *1
Instruction Manual *1

FCC Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment

has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction transmitter.

⚠ Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

Charging Precautions

The power delivered by the charger must be between min [0.05] Watts required by the radio equipment, and max [1.25] Watts in order to achieve the maximum charging speed.



Service Center

Europe

F&M Technology GmbH

Tel: +49 3415199 8410 (Working day 8 AM – 4 PM CET)

Fax: +49 3415199 8413

Address: Fraunhoferstr. 7, 04178 Leipzig, Deutschland

North America

Inateck Technology Inc

Tel: +1 (909) 698 7018 (Working day 9 AM – 5 PM PST)

Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

For Product and Battery

[EC|REP] F&M Technology GmbH

Fraunhoferstr. 7, 04178 Leipzig, Deutschland

Tel: +49 3415199 8410

Email: service@inateck.com

Postal code: 04178

[UK | REP] Inateck Technology (UK) Ltd.

195 High Street, Office B, Great Missenden, United Kingdom, HP16 0AL


Tel: +44 20 3239 9869

Manufacturer

Shenzhen Inateck Technology Co., Ltd.
Address: Suite 2507, Block 11 in Tian An Cloud Park, Bantian
Street, Longgang District, Shenzhen, Guangdong, China
Email: product@licheng-tech.com
Postal code: 518129



Documents / Resources

	inateck KB04111-11 Keyboard [pdf] Instruction Manual 2A2T9-KB04111-11, 2A2T9KB0411111, KB04111-11 Keyboard, KB04111-11, Keyboard
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.