



inateck KB04118 Bluetooth Keyboard User Manual

[Home](#) » [inateck](#) » inateck KB04118 Bluetooth Keyboard User Manual 

inateck[®]


Instruction Manual
KB04118 Bluetooth Keyboard





Contents

- 1 Product Diagram
- 2 Bluetooth Pairing
- 3 Multi-Touch Gestures
- 4 Adjust the Keyboard Backlight
- 5 Shortcut Keys
- 6 LED Indicator
- 7 Restore Factory Defaults
- 8 Check Battery Level
- 9 Charging
- 10 Sleep Mode
- 11 Product Specification
- 12 Packing List
- 13 Documents / Resources
 - 13.1 References

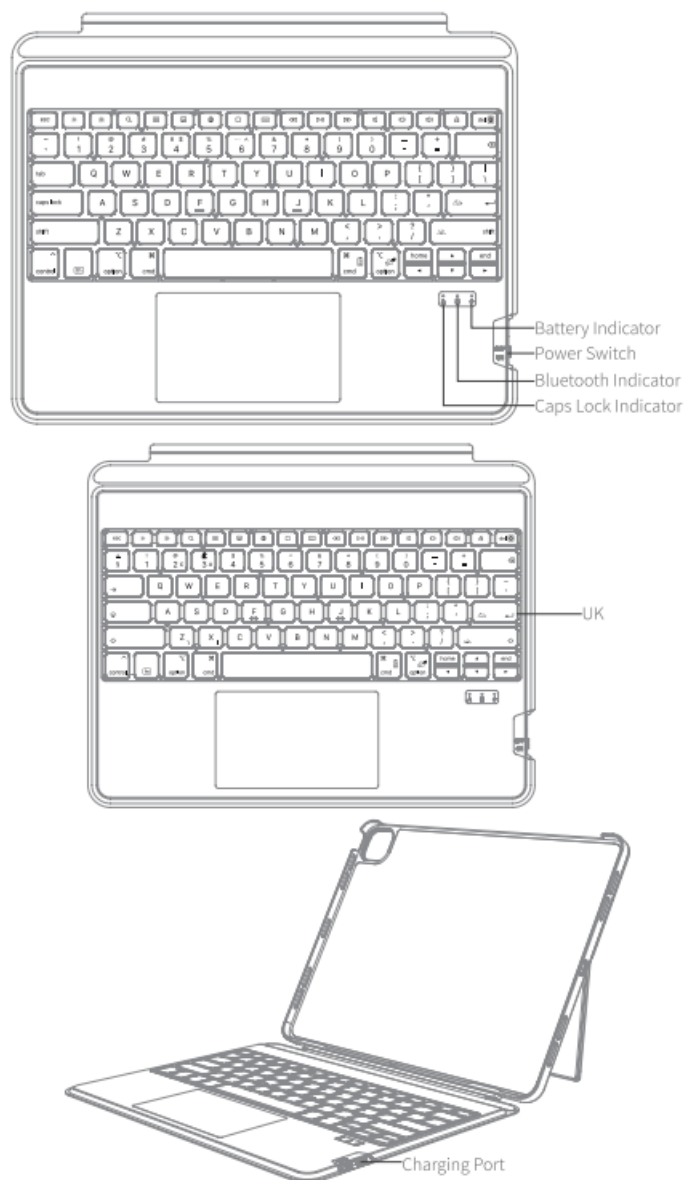Product Diagram



Bluetooth Pairing

Step 1: Put the iPad case on and slide the keyboard switch to the On position. Hold down  +  simultaneously and then the keyboard will enter pairing mode with a blinking blue indicator light. Step 2: On your iPad, go to Settings > Bluetooth, turn on Bluetooth and then “Inateck KB04118” will show up in “Other Devices”. Step 3: Tap “Inateck KB04118” to pair it with your iPad. The Bluetooth indicator will go off in seconds, which means that Bluetooth pairing is completed.

: Note:

1. Set Up Your iPad:

‘ For better user experience, please follow steps below to set up your iPad at first use once Bluetooth pairing is completed.

Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed.

Go to Settings > General > Trackpad and turn on “Tap to Click” and “Two Finger Secondary Click” .

Go to Settings > Accessibility > Touch and turn off AssistiveTouch.

Go to Settings > General > Gestures and enable the toggle for the “Four and Five Finger Swipe setting. ‘

‘ Optional Settings


Steps to stop Caps Lock changing your keyboard language: :



Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock.

Steps to disable the double tap period shortcut:

Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on Shortcut.


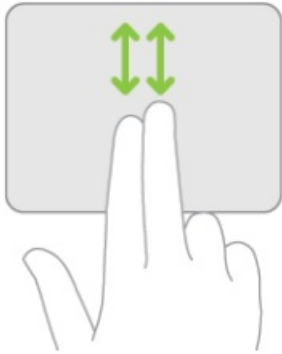






2. Fix Bluetooth Pairing Problems:

Step 1: Go to Settings > Bluetooth, find “Inateck KB04118” in My Devices and tap the info button  next to it, then tap “Forget This Device” . If there are multiple pairing records related to the keyboard, please clear all of them.



Step 2: Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed.



Step 3: Pair your Inateck KB04118 with your iPad. ;

Multi-Touch Gestures

	Drag: Click on the element and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.
	Secondary click; Click or tap with two fingers.		Show desktop: Swipe up with two fingers to zoom in or out.
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

















Adjust the Keyboard Backlight

1. Hold  +  simultaneously to adjust the backlight color. 7 colors are available in total.







2. Hold  +  simultaneously to adjust the backlight brightness. 3 levels are at your choice.

Shortcut Keys

1.

	Undo		Brightness-		Brightness+
	Search		App Switcher		Take a screenshot
	Switch keyboard layout		Return to Home Screen		Show/Hide Keyboard
	Last track		Play/Pause		Next track
	Mute		Volume-		Volume+
	Lock				



2. Common Keyboard Shortcuts

 + X	Cut	 + C	Copy	 + V	Paste
 + A	Select all	 + Space	Search	control+S pace	Switch keyboard layout
 + Tab	Switch between Apps				



LED Indicator

Indicator	Status	Meaning
Indicator 1	Solid	Caps Lock on
	Off	Caps Lock off
Indicator 2	Fast Blinking	Bluetooth Pairing
	Slow Blinking	Bluetooth Reconnecting
	Off	Bluetooth connected or unconnected
Indicator 3 – Red	Blinking	Low battery
	Solid	Charging
Indicator 3 – Green	Solid	Fully charged

Restore Factory Defaults

Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed.

Check Battery Level

Hold  +  simultaneously to check the battery level according to the blinking frequency of the red battery indicator.

Blinking Frequency	Battery Level
once	0-25%
Twice	25% 50%
Three Times.	50%75%
fourTimes	75%-100%

Charging

When the battery level is under 20%, the battery indicator will blink in red. Please recharge the keyboard in time. The recommended charging voltage and current are 5V and 250mA respectively. To recharge the keyboard, you can connect the included USB cable to the charger of your cellphone or the USB port of a computer. The keyboard will be fully charged in 2-3 hours. The indicator will stay in red when the keyboard is charging and turn green when it's fully charged.

Sleep Mode

1. When KBO4118 is left idle for 1 minutes, the backlight will turn off.
2. When KBO4118 is left idle for 10 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

Note: Tapping the trackpad cannot wake up the keyboard.

Product Specification

Bluetooth Version	Bluetooth 5.3
Bluetooth Range	10 m
Charging Time	2-3h
Operating Current (Backlight on)	About 5h
Operating Current (Backlight off)	About 55h
Operating Temperature	-10T – +55°C
Bluetooth Frequency Range	2402-24130MHZ
Actuation Force	60 ± 10g
Battery Capacity	500mAh

Packing List

- KBOA118*1
- Charging Cable *1
- Instruction Manual -1

FCC Warning Statement: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

EU Declaration of Conformity



Inateck Co, Ltd. hereby declares that this device complies with the Directive 2014/53/EU .

A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/euro-compliance>.

Service Center

Europe

F&M Technology GmbH

Tel: +49 341 5199 8410 (Working day 8 AM – 4 PM CET)

Fax: +49 341 5199 8413

Address: Fraunhoferstra e 7, 04178 Leipzig, Deutschland

North America

Inateck Technology Inc.

Tel: +1 (909) 698 7018 (Working day 9 AM – 5 PM PST)

Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

F&M Technology GmbH

Fraunhoferstra e 7, 04178 Leipzig, Deutschland

Tel: +49 341 5199 8410

Inateck Technology (UK) Ltd.

| UK | REP | 95 High Street, Office B, Great Missenden, United Kingdom, HP16 OAL


Tel: +44 20 3239 9869

Manufacturer

Shenzhen Inateck Technology Co., Ltd.

Address: Suite 2507, Block 11 in Tian An Cloud Park, Bantian Street, Longgang District, Shenzhen, Guangdong, China

Documents / Resources

	inateck KB04118 Bluetooth Keyboard [pdf] User Manual KB04118 Bluetooth Keyboard, KB04118, Bluetooth Keyboard, Keyboard
---	---

References

- [User Manual](#)