



### Home » inateck » inateck KB06103 Keyboard Instruction Manual 📆

### Contents [ hide ]


- 1 inateck KB06103 Keyboard
- 2 Product Diagram
- 3 Bluetooth Pairing
- 4 iPad OS Multi-Touch Gestures
- 5 Adjust the Keyboard Backlight
- 6 Shortcut Keys
- 7 How to Use on Windows
- 8 LED Indicator
- 9 Charging
- 10 Product Specification
- 11 Keyboard Stand Usage
- 12 Packing List
- 13 FCC STATEMENT
- 14 Service Center
- 15 Documents / Resources
  - 15.1 References



# inateck KB06103 Keyboard



# **Product Diagram**

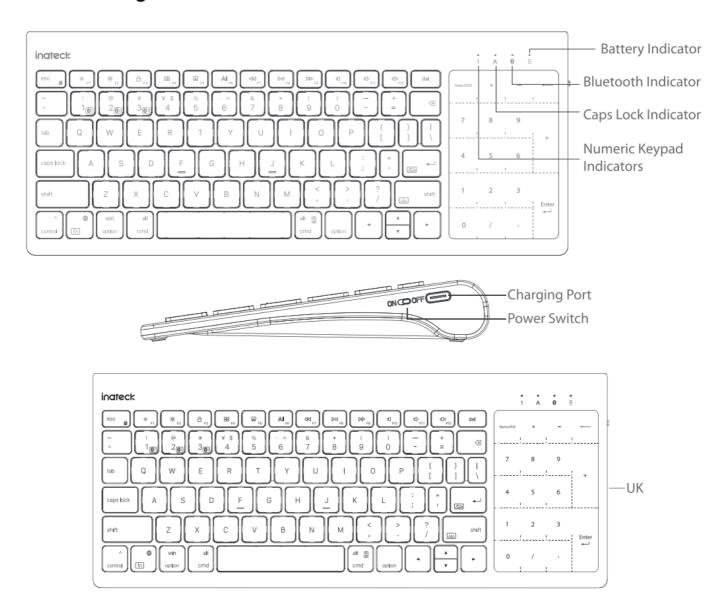

- Power On: Slide to ON, the Bluetooth indicator lights up.
- Power Off: Slide to OFF, the Bluetooth indicator turns off.

### **Bluetooth Pairing**

 Step1: For the first use, place the iPad on the stand and slide the power switch to the On position, and then KB06103 will automatically enter Bluetooth Channel 1 pairing mode (Default mode).

To enter the Bluetooth pairing mode for future use, you can also try the following steps: which means that Bluetooth pairing is completed.

- Hold fn + simultaneously for 3 seconds. When the Bluetooth indicator flashes in blue rapidly, it means KB06103 is in Bluetooth Channel 1 pairing mode.
- Hold fn + 2 simultaneously for 3 seconds. When the Bluetooth indicator flashes in orange rapidly, it means KB06103 is in Bluetooth Channel 2 pairing mode.
- Hold fn + (# 3 83) simultaneously for 3 seconds. When the Bluetooth indicator flashes green rapidly, it means KB06103 is in Bluetooth Channel 3 pairing mode.
- **Step2:** On the iPad, select Settings>Bluetooth>On, and then "Inateck KB06103" will show up in "Other Devices".
- **Step3:** Tap "Inateck KB06103" to pair it with your iPad, and then the Bluetooth indicator will stay solid in seconds, which means that Bluetooth pairing is completed.

#### **Note**

#### Set Up Your iPad:

For a better user experience, please follow the steps below to set up your iPad at first use once Bluetooth pairing is completed (using iPadOS 17 and above versions as an example). For any queries, feel free to contact us.

- Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed.
- Go to Settings > General > Trackpad and turn on "Tap to Click" and "Two-Finger Secondary Click".
- Go to Settings > Accessibility > Touch and turn off "Assistive Touch".
- Go to Settings > Multitasking & Gestures and turn on "Four & Five Finger Gestures".

• Go to Settings > Accessibility Keyboards and turn off "Full Keyboard Access".

### **Optional Settings**

- Steps to stop Caps Lock changing your keyboard language:
- Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock
- Steps to disable the double-tap period shortcut:
- Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on. Shortcut.
- Steps to disable using the Global Key to show Emoji:
- Go to Settings > General > Keyboard > Hardware Keyboard and turn off "Press the Global Key for Emoji".

### **Fix Bluetooth Pairing Problems**

- Step 1: Go to Settings > Bluetooth, find "Inateck KB06103" in My Devices and tap the info button next to it, then tap Forget This Device. If there are multiple pairing records related to the keyboard, please clear all of them.
- Step 2: Hold simultaneously for 3 seconds and then all four indicators will blink for 3 times once the factory reset is completed.
- Step 3: Pair it with your Inateck KB06103.

### **iPad OS Multi-Touch Gestures**

	Drag:  Click and hold the item until it lifts up and drag it to another location with another finger.	TI TI	Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out:  Pinch with two fingers to zoom in or out.
	Secondary click: Click or tap with two fingers.	***************************************	Show desktop: Swipe up with three fingers.
†††	App Exposé:  Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

### **Touchpad Area Numeric Keypad On/Off**

- Enable Numeric Keypad: Double-tap the NumLock area on the touchpad twice, and the indicator 1 will stay green.
- Disable Numeric Keypad: Double-tap the NumLock area on the touchpad twice to turn it off, and the indicator 1 will turn off.

**Note:** If there is no numeric input within 60 seconds, the numeric keypad function will be disabled ¡and the touchpad function will automatically switch on, with the numeric keypad indicator turning off.

# **Adjust the Keyboard Backlight**

- 1. Hold fn + simultaneously to adjust the backlight color. 7 colors are available in total.
- 2. Hold fn + simultaneously to adjust the backlight brightness. 3 levels are at your choice.

# **Shortcut Keys**

esc	Undo	.; i⇔ F1	Brightness-	-\\(\dagger_{F2}\)	Brightness+
☐ F3	Lock	68 <sub>F4</sub>	Task View	F5	Take a screenshot
Al F6	AI (Inateck Origin)	F7	Last Track	DII F8	Play/Pause
DD <sub>F9</sub>	Next Track	F10	Mute	(1) F11	Volume-
(1)) F12	Volume+	del	Delete	<b>A</b>	Page up
•	Page down	•	Home	<b>&gt;</b>	End


### **Common Keyboard Shortcuts**

cmd + X	Cut	cmd + C	Сору	cmd + V	Paste
cmd + A	Select all	cmd + Space	Search	control+Space	Switch keyboard layout
cmd + Tab	Switch between Apps				

#### How to Use on Windows

#### How to Use F1-F12

The default function of F1-F12 is a shortcut and multimedia functions.



- When the Fn Lock is enabled:
- Press can trigger the functionality owned by such as the refresh function on Windows. The battery indicator light will flash twice quickly; if En lock is turned off, the indicator will not flash.
- To use shortcut and multimedia functions, press fn + F key, e.g., fn + is to decrease screen brightness.
- This method applies to all F keys (F1-F12).
- When the Fn Lock is disabled (Default Status):
- For example, pressing F5 will take a screenshot; if you press fn + F5, it will trigger

the F5 refresh function.

### The Combination of Fn and Other Keys

fn + esc	Enable/Disable Fn Lock	
fn + ait ait cmd	Check the Battery Level	
[	Short press to enter BT1	
[fn]+[1 81]	Hold for 3S to enter BT1 pairing mode	
@	Short press to enter BT2	
[fn] + (2 ®2)	Hold for 3S to enter BT2 pairing mode	
#	Short press to enter BT3	
[fn] <sup>™</sup> [3 ®3]	Hold for 3S to enter BT3 pairing mode	

#### **Al Function**

- On Windows devices, the can be used to wake up Inateck Origin, a software that supports AI translation, AI chat, and other functions.
- You can search for Inateck Origin in the Microsoft Store to download it.

# Short-press the Al F6

- 1. If no text is copied, it will activate the Al chat.
- 2. If text is copied, it will activate AI translation.

### **LED Indicator**

Indicator	Status	Meaning
Canal ack Indicator White	Solid	Caps Lock On
Caps Lock Indicator-White	Off	Caps Lock Off
Numeric keypad Indicator-	Solid	Numeric keypad is enabled; touchpad function is unavailable.
Green	Off	Numeric keypad is disabled; touchpad function is available.
	Solid	Bluetooth Connected
Bluetooth Indicator	Off	Bluetooth Unconnected
(Channel 1-Blue Channel 2-Orange Channel 3-Green)	Slow Blinking	Bluetooth Reconnecting
Charmer 3 Green)	Fast Blinking	Bluetooth Pairing
Charging Indicator Rad	Flash	Low Battery
Charging Indicator-Red	Solid	Charging
Charging Indicator-Green Solid Fully Charged		Fully Charged
Fn Lock Indicator-Red	Flash	Flash for 2S, Fn Lock On
rii Lock indicator-Red	Stay Off	Fn Lock Off

### **Restore Factory Defaults**

• Hold for 3 seconds, and then the four indicators will blink four 3 times once the factory reset is completed.

### **Check Battery Level**

Hold fn + at a simultaneously to check the battery level according to the blinking frequency of the red battery indicator.

Blinkina Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

# Charging

- When the battery level is under 20%, the battery indicator will blink red.
- You can connect the included USB cable to recharge the keyboard.

- The recommended charging voltage is 5V.
- The keyboard will fully charge in 3.5 hours.
- The red battery indicator will stay solid red when the keyboard is charging.
- Once it's fully charged, the battery indicator turns green.

### Sleep Mode

- 1. When KB06103 is left idle for 10 seconds, he backlight will automatically turn off.
- 2. When KB06103 is left idle for 10 minutes, it will enter sleep mode, and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

**Note:** Pressing the touchpad cannot wake up the keyboard.

## **Product Specification**

• Bluetooth Version: V5.3

Bluetooth Range: 10 m

Charging Time: 3.5h

• Continuous Working Time (Backlight On): About 26h

• Continuous Working Time (Backlight Off): About 175h

• Operating Temperature: -10°C ~ +55°C


• Bluetooth Frequency Range: 2402- 2480 MHz

Actuation Force: 60± 10g


• Battery Capacity: 2600mAh

### **Keyboard Stand Usage**


1. Slide out the stand on the back until it reaches the limit position.

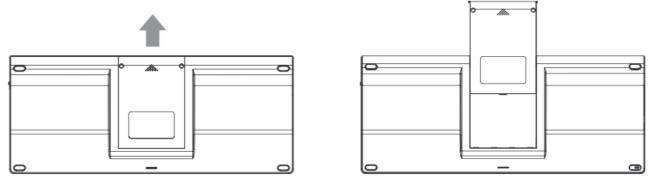

2. Rotate the stand support block to the limit position.

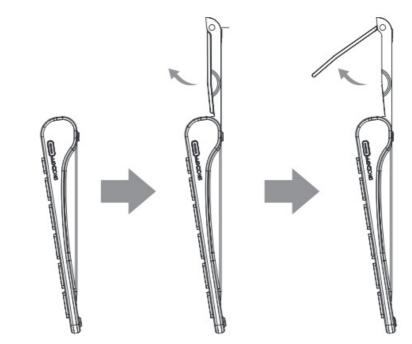

3. Place the tablet or phone on the stand. Note: Do not apply excessive force to the stand components to avoid exceeding the load-bearing capacity.

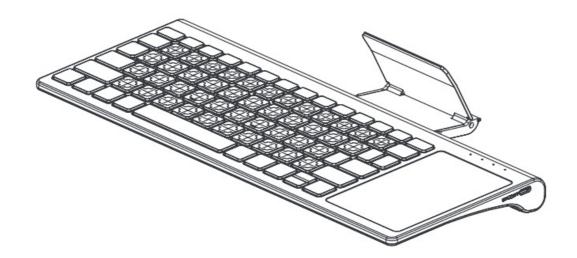

# **Packing List**

- KB06103\*1
- Charging Cable\*1
- User Manual\*1

### **FCC STATEMENT**

#### **FCC Note**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and

2. This device must accept any interference received, including interterence that may cause undesired operation.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, under part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used under the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Note:** The Grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet the general RF exposure requirements. This equipment complies with the FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or in conjunction with any other antenna or transmitter.


### **Battery Safety Warning:**

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions:

Do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

### **Charging Precautions/Ladehinweise**


• The power delivered by the charger must be between min [0.175] Watts required by the radio equipment, and max [1.75] Watts in order to achieve the maximum charging speed.



### **EU Declaration of Conformity**

- Inateck Co., Ltd. hereby declares that this device complies with Directive 2014/53/EU.
- A copy of the Declaration of Conformity can be accessed from <a href="https://www.inateck.de/pages/inateck-euro-compliance">https://www.inateck.de/pages/inateck-euro-compliance</a>.



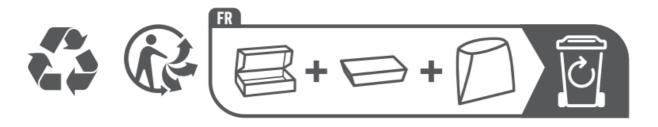

#### **Service Center**

### **Europe**

• F&M Technology GmbH

• Tel: +49 341 5199 8410 (Working day 8 AM – 4 PM CET)

• Fax: +49 341 5199 8413

• Address: Fraunhoferstraße 7, 04178 Leipzig, Deutschland

#### **North America**

- Inateck Technology Inc.
- Tel: +1 (909) 698 7018 (Working day 9 AM 5 PM PST)
- Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

### F&M Technology GmbH

Fraunhoferstraße 7, 04178 Leipzig, Deutschland

• Tel: +49 341 5199 8410

Email: <u>service@inateck.com</u>

Postal code: 04178

### Inateck Technology (UK) Ltd.

• 95 High Street, Office B, Great Missenden, United

Kingdom, HP16 OAL

• Tel: +44 20 3239 9869

#### Manufacturer

Shenzhen Inateck Technology Co., Ltd.

Address: Suite 2507, Block 11 in Tian An Cloud Park, Bantian

Street, Longgang District, Shenzhen, Guangdong, China

Email: product@licheng-tech.com

Postal code: 518129

# **Documents / Resources**

: EFFEFE

inateck KB06103 Keyboard [pdf] Instruction Manual

KB06103, 2A2T9-KB06103, 2A2T9KB06103, KB06103 Keyboard, KB061

03, Keyboard

### References

- User Manual
  - ▶ 2A2T9-KB06103, 2A2T9KB06103, inateck, KB06103, KB06103 Keyboard,
- inateck Keyboard

# Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name
Email
Website
☐ Save my name, email, and website in this browser for the next time I comment.
Post Comment
Search:
e.g. whirlpool wrf535swhz

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.