

inateck KB09119 Keyboard Instruction Manual

Contents

- [1 inateck KB09119 Keyboard](#)
- [2 BUTTON FUNCTION](#)
- [3 Adjust the Keyboard Backlight](#)
- [4 Shortcut Keys](#)
- [5 LED Indicator](#)
- [6 Restore Factory Defaults](#)
- [7 Charging](#)
- [8 Product Specification](#)
- [9 Packing List](#)
- [10 FCC STATEMENT](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)



inateck KB09119 Keyboard



BUTTON FUNCTION

Power ON/OFF

- **Power ON:** Toggle the power switch to the On position and the Bluetooth indicator will turn on.
- **Power OFF:** Toggle the power switch to the Off position and all indicators will turn off.




Bluetooth Pairing

Step1: Mount the iPad onto the magnetic panel, toggle the power switch to the On position, and it will

automatically enter Bluetooth pairing mode. In future use, please press  + E;  to enter Bluetooth pairing mode. The Bluetooth indicator will blink in Blue once it enters pairing mode successfully.

Step2: On the iPad, select Settings>Bluetooth>On and then “Inateck KB09119” will show up in “Other Devices”

Step3: Tap “Inateck KB09119” to pair it with your iPad and then the Bluetooth indicator will stay solid in seconds, which means that Bluetooth pairing is completed.

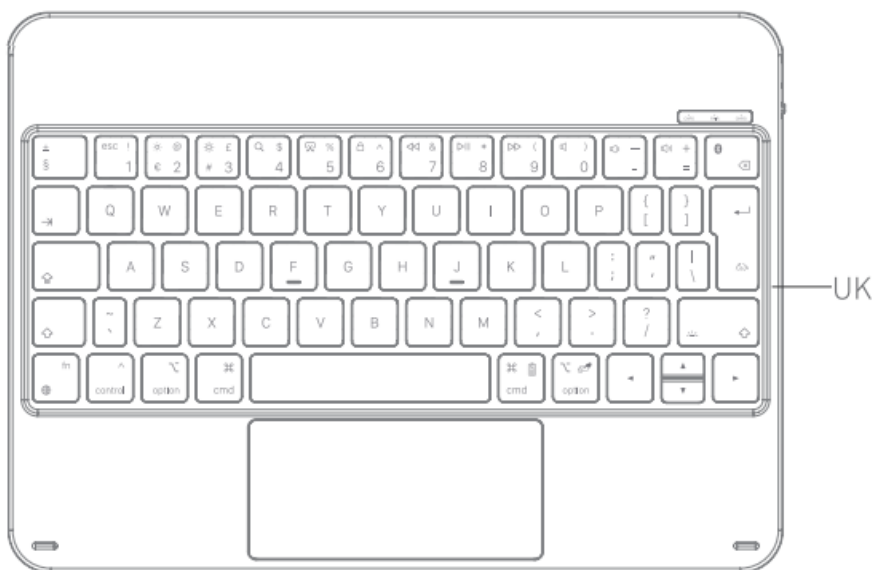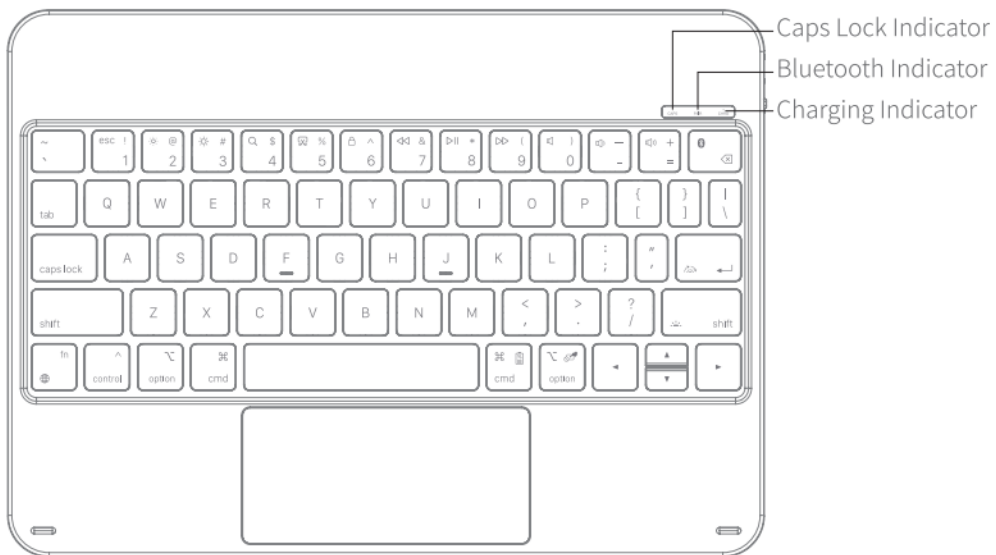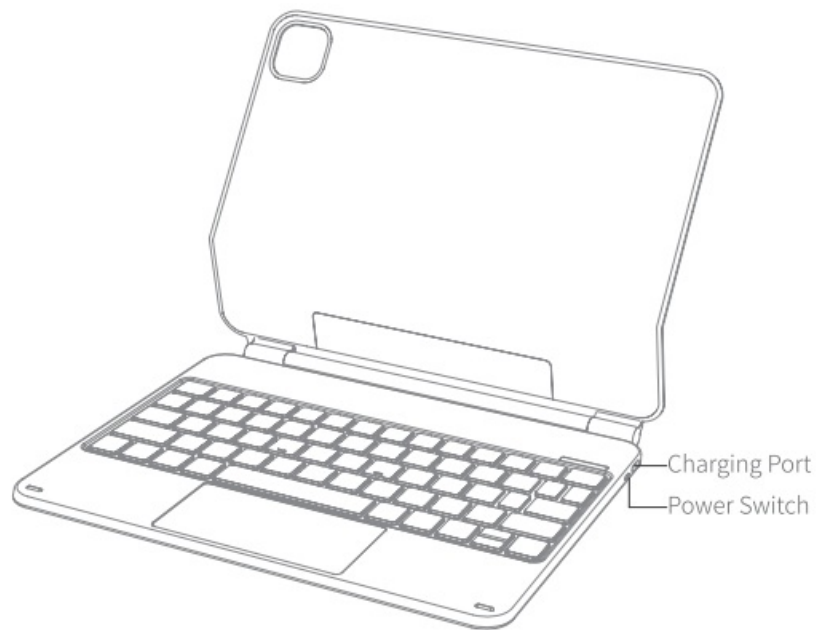

Note:

Set Up Your iPad:

For better user experience, please follow steps below to set up your iPad at first use once Bluetooth pairing is

completed (using iPadOS 17 as an example). For any queries, feel free to contact us.

- Go to Settings > General > Trackpad and drag the slider to the middle of the tracking speed.
- Go to Settings > General > Trackpad and turn on “Tap to Click” and “Two Finger Secondary Click”
- Go to Settings > Accessibility > Touch and turn off “Assistive Touch”
- Go to Settings > Multitasking & Gestures and turn on “Four & Five Finger Gestures”
- Go to Settings > Accessibility >Keyboards and turn off “Full Keyboard Access”

Optional Settings

Steps to stop Caps Lock changing your keyboard language:

- Go to Settings > General > Keyboard > Hardware Keyboard and turn off Switch Languages using Caps Lock.
- Steps to disable the double tap period shortcut:
- Go to Settings > General > Keyboard > Hardware Keyboard and click the switch to turn on “” Shortcut.

Steps to disable using the Global Key to show Emoji:

- Go to Settings > General > Keyboard > Hardware Keyboard and turn off “Press the Global Key for Emoji”

Fix Bluetooth Pairing Problems:





Step 1: Go to Settings > Bluetooth, find “Inateck KB09119” in My Devices and tap the info button ;



Step 2: Hold + J simultaneously for 3 seconds and then all three indicators will blink for 3 : times once the factory reset is completed.





Step 3: Pair it with your Inateck KB09119

Multi-Touch Gestures

	Drag: Click and hold the item until it lifts up and drag it to another location with another finger.		Scroll: Slide two fingers up or down to scroll.
	Swipe: Swipe left or right with two fingers.		Zoom in or out: Pinch with two fingers to zoom in or out.

	Secondary click: Click or tap with two fingers.		Show desktop: Swipe up with three fingers.
	App Exposé: Swipe up with three fingers and pause.		Swipe between full-screen apps: Swipe left or right with three fingers.

Adjust the Keyboard Backlight

- Hold  +  simultaneously to adjust the backlight color. 7 colors are available in total.
- Hold  +  simultaneously to adjust the backlight brightness. 3 levels are at your choice.

Shortcut Keys

esc ! 1	Undo	⌘ @ 2	Brightness-	⌘ # 3	Brightness+
⌘ \$ 4	Search	⌘ % 5	Take a screenshot	⌘ ^ 6	Lock
⌘ & 7	Last track	⌘ * 8	Play/Pause	⌘ (9	Next track
⌘) 0	Mute	⌘ - -	Volume-	⌘ += =	Volume+

Common Keyboard Shortcuts



⌘ + X	Cut	⌘ + C	Copy	⌘ + V	Paste
⌘ + A	Select all	⌘ + Space	Search	control+Space	Switch keyboard layout
⌘ + Tab	Switch between Apps				

LED Indicator

Indicator	Status	Meaning
Caps Lock Indicator	Solid	Caps Lock On
	Off	Caps Lock Off
Bluetooth Indicator	Solid	Bluetooth Connected
	Off	Bluetooth Unconnected
	Slow Blinking	Bluetooth Reconnecting
	Fast Blinking	Bluetooth Pairing
Charging Indicator–Red	Blinking	Low Battery
	Solid	Charging
Charging Indicator–Green	Solid	Fully Charged



Restore Factory Defaults



Hold  +  simultaneously for 3 seconds and then the three indicators will blink for 3 times once the factory reset is completed.

Check Battery Level



Hold simultaneously  +  to check the battery level according to the blinking frequency of the red battery indicator.

Blinkina Frequency	Battery Level
Once	0-25%
Twice	25%-50%
Three Times	50%-75%
Four Times	75%-100%

Charging

When the battery level is under 20%, the battery indicator will blink in red. Please use the included USB cable to recharge the keyboard in time. The recommended charging voltage is 5V. The keyboard will be fully charged in 2-3 hours. The red battery indicator will stay solid when the keyboard is charging. Once it's fully charged, the green battery indicator will stay solid.

Sleep Mode

1. When KB09119 is left idle for 1 minutes, the backlight will turn off.

2. When KB09119 is left idle for 10 minutes, it will enter sleep mode and the Bluetooth connection will be disrupted. The connection can be rebuilt with a press of any key.

Note: Tapping the trackpad cannot wake up the keyboard

Product Specification

Bluetooth Version	VS.3
Bluetooth Range	10m
Charging Time	About 2-3h
Continuous Working Time (Backlight on)	About 8h
Continuous Working Time (Backlight off)	About 55h
Operating Temperature	-10° -55°
Bluetooth Frequency Range	2402-2480MHz
Actuation Force	60 ± 10g
Battery Capacity	500mAh

Packing List

- KB09119*1
- USB-C Charging Cable *1
- Instruction Manual •1

FCC STATEMENT

Note

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the Users, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: The Grantee is not responsible for any changes or modifications not expressly approved by the party

responsible for compliance. such modifications could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.

This equipment complies with FCC's RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna(s) must not be co-located or conjunction with any other antenna or transmitter.

EU Declaration of Conformity

Inateck Co., Ltd. hereby declares that this device complies with the Directive 2014/53/EU .

A copy of the Declaration of Conformity can be accessed from <https://www.inateck.de/pages/inateck-euro-compliance>.



Battery Safety Warning:

This product contains a built-in rechargeable lithium battery. Please observe the following safety precautions: do not dismantle, hit, crush, or expose the battery to fire. If the battery experiences severe swelling, discontinue use immediately. Avoid placing the battery in high-temperature environments, and do not use it if it has been immersed in water. During transportation, do not mix the battery with metallic objects.

Service Center

Europe

TF&eIM: + T4e9c 3h4n1o5lo1g9y9 G8m41b0H (Working day 8 AM – 4 PM CET)

AFadxd:r+ e4s9s: 3 F4r1a5un1h9o9 f8e4rs1t3r aP.,e 7, 04178 Leipzig, Deutschland

North America

Tlneal:t+ec1 k (9T0e9c)h 6n9o8lo 7g0y1 8ln (cW. orking day 9 AM -5 PM PST)

Address: 2078 Francis St., Unit 14-02, Ontario, CA 91761, USA

F&M Technology GmbH
For Product and Battery
EC REP
Fraunhoferstraße 7, 04178 Leipzig, Deutschland
Tel: +49 341 5199 8410
Email: service@inateck.com
Postal code: 04178

Inateck Technology (UK) Ltd.
UK REP
95 High Street, Office B, Great Missenden, United Kingdom, HP16 0AL
Tel: +44 20 3239 9869

Manufacturer


Shenzhen Inateck Technology Co., Ltd.

SATdrdereets, sL:o Snugigtea n25g 0D7i,s tBrlioctc,k S 1h1e ninz hTeiann, GAnu aCnloguaddon Pga,r Ck,h Binaan tian

Email: product@licheng-tech.com

Postal code: 518129

Documents / Resources

	inateck KB09119 Keyboard [pdf] Instruction Manual KB09119, KB09119 Keyboard, Keyboard
--	--

References

- [User Manual](#)

[Manuals+](#). [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.