

Intesis KNX TP to ASCII IP and Serial Server



Contents [[hide](#)]

- 1 Important Information
- 2 Features And Benefits
- 3 General
- 4 Identification And Status
- 5 Physical Features
- 6 Certifications And Standards
- 7 Use Case
- 8 Documents / Resources
 - 8.1 References

Important Information

Item number: IN701KNX1000000

Integrate any KNX device or installation with an ASCII BMS or any ASCII IP or ASCII serial controller. This integration aims to make KNX communication objects and resources accessible from an ASCII-based control system or device as if they were a part of the ASCII system and vice versa.

Features And Benefits

✓ Easy integration with Intesis MAPS

The integration process is quickly and easily managed using the Intesis MAPS configuration tool.

✓ Configuration tool and gateway automatic updates

Both the Intesis MAPS configuration tool and the gateway's firmware can receive automatic updates.

✓ Control up to 3000 KNX communication objects

Up to 3000 KNX communication objects can be controlled by the gateway.

✓ ASCII bus automatic write request on value change

When an ASCII value changes, the gateway automatically sends a write request to the ASCII bus.

✓ Commissioning-friendly approach with Intesis MAPS

Templates can be imported and reused as often as needed, significantly reducing commissioning time.

✔ **Support for KNX TP devices**

The gateway supports KNX TP (twisted pair) devices.

✔ **ASCII Serial (232/485) and ASCII IP support**

The gateway fully supports both ASCII IP and ASCII Serial (232/485).

✔ **Personalized ASCII strings use**

It is possible to use personalized ASCII strings on this gateway.

General

Net Width (mm)	88
Net Height (mm)	90
Net Depth (mm)	58
Net Weight (g)	194
Packed Width (mm)	127
Packed Height (mm)	86
Packed Depth (mm)	140
Packed Weight (g)	356
Operating Temperature °C Min	-10
Operating Temperature °C Max	60
Storage Temperature °C Mi n	-30
Storage Temperature °C M ax	60

Power Consumption (W)	1.7
Input Voltage (V)	For DC: 9 .. 36 VDC, Max: 180 mA, 1.7 W For AC: 24 V AC $\pm 10\%$, 50-60 Hz, Max: 70 mA, 1.7 W Recommended voltage: 24 VDC, Max: 70 mA
Power Connector	3-pole
Configuration	Intesis MAPS
Capacity	Up to 100 points.
Installation Conditions	This gateway is designed to be mounted inside an enclosure. If the unit is mounted outside an enclosure, precautions should always be taken to prevent electrostatic discharge to the unit. When working inside an enclosure (e.g., making adjustments, setting switches, etc.), typical anti static precautions should always be followed before touching the unit.
Content of Delivery	Intesis Gateway, Installation Manual, USB Configuration cable.
Not Included (in delivery)	Power supply not included.
Mounting	DIN rail mount (bracket included), Wall mount
Housing Materials	Plastic
Warranty (years)	3 years
Packaging Material	Cardboard

Identification And Status

Product ID	IN701KNX1000000_ASCII_KNX
------------	---------------------------

Country of Origin	Spain
HS Code	8517620000
Export Control Classification Number (ECCN)	EAR99


Physical Features

Connectors / Input / Output	Power supply, KNX, Ethernet, Console port USB Mini-B type, USB storage, EIA-232, EIA-485.
LED Indicators	Gateway and communication status.
Push Buttons	Factory reset.
DIP & Rotary Switches	EIA-485 serial port configuration.
Battery Description	Manganese Dioxide Lithium button battery.


Certifications And Standards

ETIM Classification	EC001604
WEEE Category	IT and telecommunications equipment

Use Case

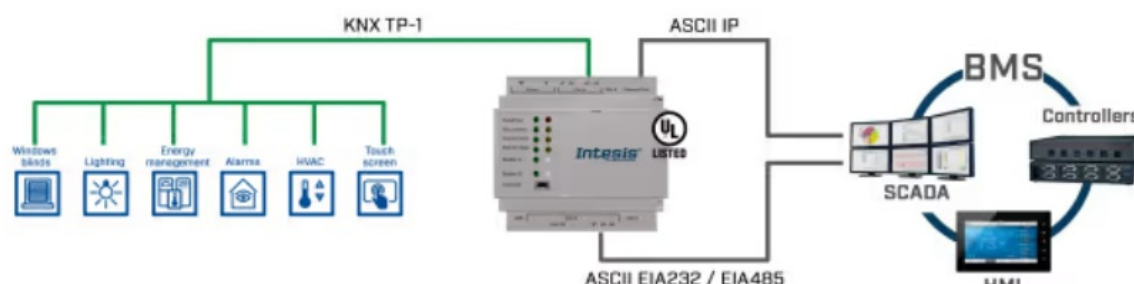

Integration example.

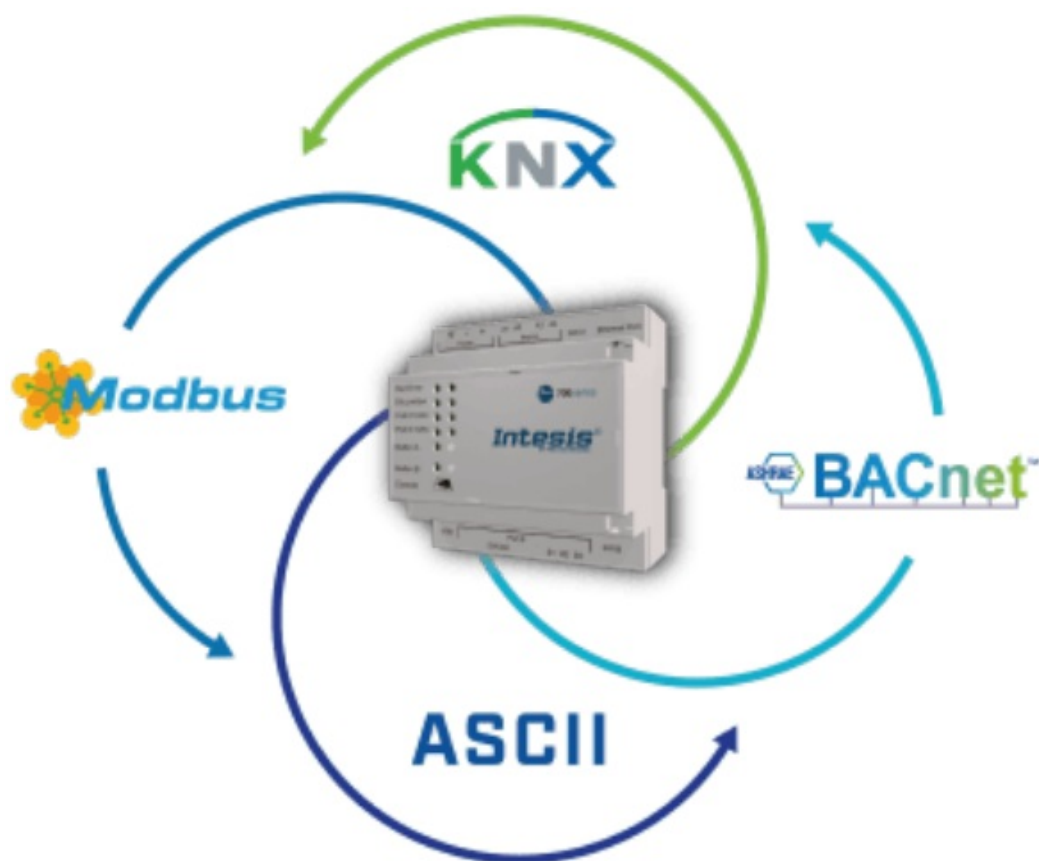


KNX
ASCII

Hms

Intesis[®]
BY HMS NETWORKS

Documents / Resources



[Intesis KNX TP to ASCII IP and Serial Server \[pdf\]](#) Owner's Manual
IN701KNX1000000, KNX TP to ASCII IP and Serial Server, ASCII IP and Serial Server, Serial Server, Server

References

- [User Manual](#)

Intesis

ASCII IP and Serial Server, IN701KNX1000000, Intesis, KNX TP to ASCII IP and Serial Server, Serial Server, Server

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.