



invt IVC1S Series Micro Programmable Logic Controller User Manual

[Home](#) » [invt](#) » invt IVC1S Series Micro Programmable Logic Controller User Manual 

Contents

- 1 invt IVC1S Series Micro Programmable Logic Controller
- 2 IVC1S Series DC Power PLC Quick
- 3 Introduction
 - 3.1 Model Designation
 - 3.2 Terminal Introduction
- 4 Power Supply
- 5 Digital Inputs & Outputs
- 6 Communication Port
- 7 Installation
 - 7.1 Installation Dimensions
 - 7.2 Installation Method
- 8 Power-on Operation And Maintenance
- 9 Documents / Resources
- 10 Related Posts



invt IVC1S Series Micro Programmable Logic Controller




IVC1S Series DC Power PLC Quick

This quick start manual is to offer you a quick guide to the design, installation, connection and maintenance of IVC1S series PLC, convenient for on-site reference. Briefly introduced in this booklet are the hardware specs, features, and usage of IVC1S series PLC, plus the optional parts and FAQ for your reference. For ordering the above user manuals, contact your INVT distributor or sales office.

Introduction

Model Designation

The model designation is shown in the following figure.

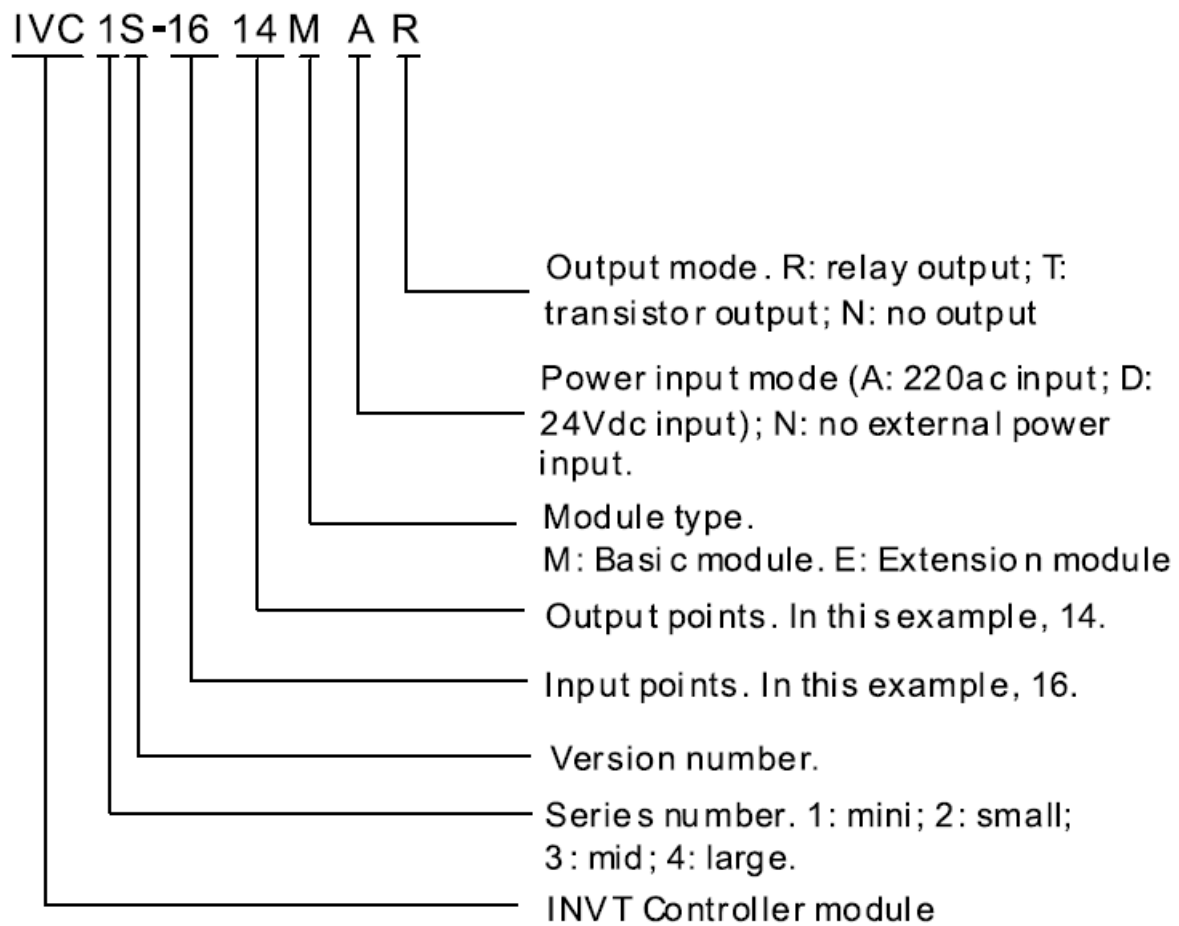

To Customers:

Thank you for choosing our products. To improve the product and provide better service for you, could you please fill in the form after the product has been operated for 1 month, and mail or fax it to our Customer Service Center? We will send you an exquisite souvenir upon receiving the complete Product Quality Feedback Form.

Furthermore, if you can give us some advices on improving the product and service quality, you will be awarded a special gift. Thank you very much!

Shenzhen INVT Electric Co., Ltd.


Product Quality Feedback Form

Customer name		Tele	
Address		Zip code	
Model		Date of use	
Machine SN			
Appearance or structure			
Performance			
Package			
Material			
Quality problem during usage			
Suggestion about improvement			

Address: INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China
Tel: +86 23535967

Outline

The outline of the basic module is shown in the following figure by taking the example of IVC1S-1614MDR.

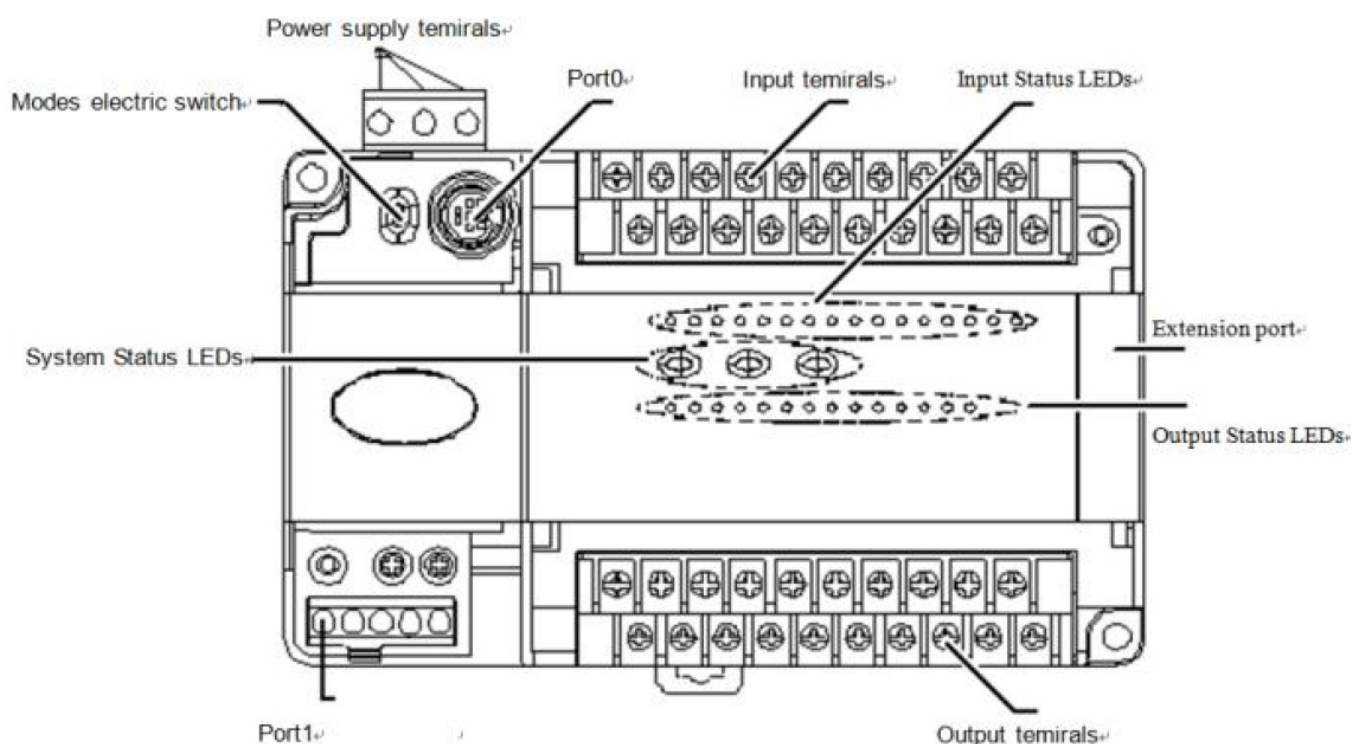

PORT0 and PORT1 are communication terminals. PORT0 uses RS232 mode with Mini DINS socket. PORT1 Has RS485. The mode selection switch has two positions: ON and OFF.

Terminal Introduction

The layouts of terminals of different 110 points are shown below:

1. 14-point, 16-point, 24-point

Input terminal:

S/S	X0	X2	X4	X6	X10	X12	X14
●	X1	X3	X5	X7	X11	X13	X15

Output terminal:

+24	Y0	Y1	Y2	Y3	Y4	Y6	Y10
COM	COM0	●	COM1	COM2	Y5	Y7	Y11

2. 30-point

Input terminal:

COM	S/S	X0	X2	X4	X6	X10	X12	X14	X16
+24	●	X1	X3	X5	X7	X11	X13	X15	X17

Output terminal:

Y0	Y1	Y2	Y3	Y4	Y6	●	Y10	Y12	Y14
COM0	●	COM1	COM2	Y5	Y7	COM3	Y11	Y13	Y15

3. 40-point

Input terminal:

S/S	X0	X2	X4	X6	X10	X12	X14	X16	X20	X22	X24	X26
●	X1	X3	X5	X7	X11	X13	X15	X17	X21	X23	X25	X27

Output terminal:

+24	Y0	Y1	Y2	Y3	Y4	Y6	●	Y10	Y12	Y14	Y16	●
COM	COM0	●	COM1	COM2	Y5	Y7	COM3	Y11	Y13	Y15	Y17	●


4. 60-point

Input terminal:

COM	S/S	X0	X2	X4	X6	X10	X12	X14	X16
+24	●	X1	X3	X5	X7	X11	X13	X15	X17


X20	X22	X24	X26	X30	X32	X34	X36	X40	X42
X21	X23	X25	X27	X31	X33	X35	X37	X41	X43

Output terminal:

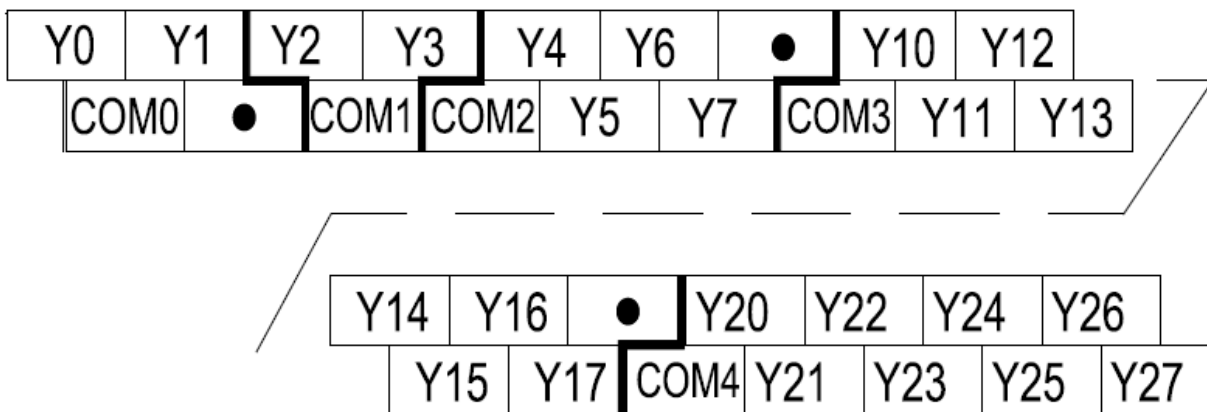


5. 48-point

Input terminal:

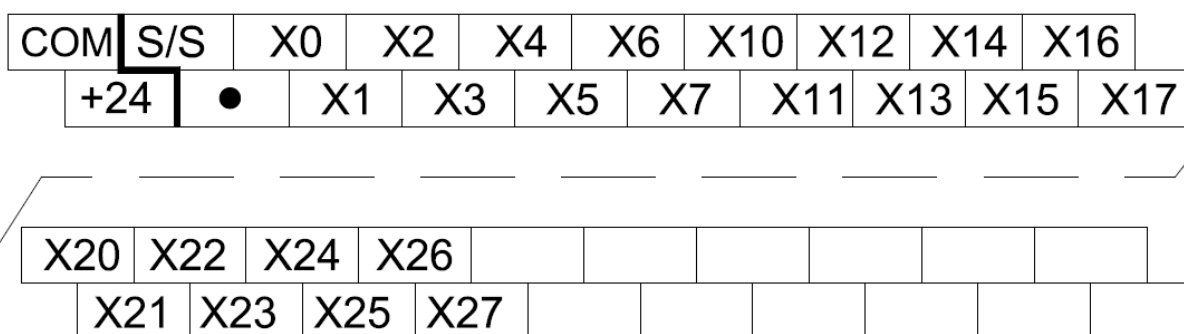

Output terminal:

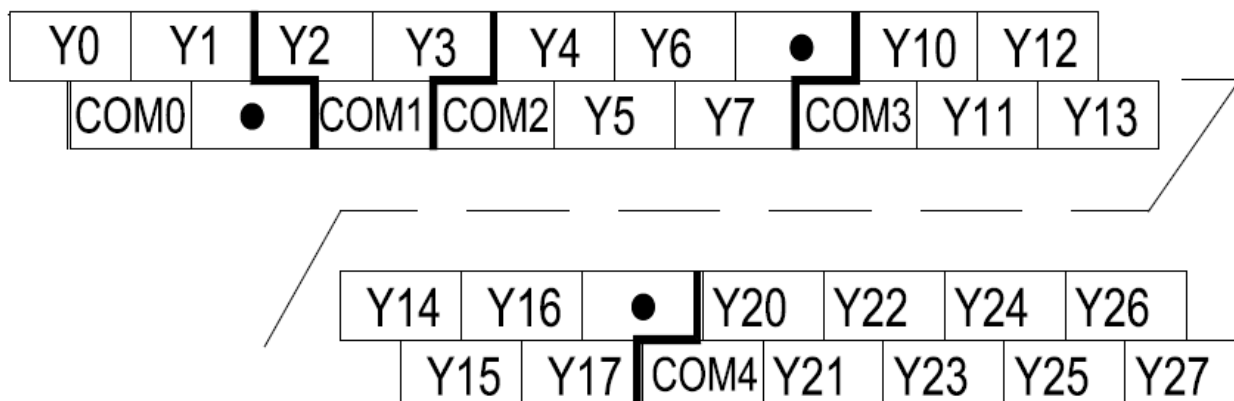

Power Supply

The specification of PLC built-in power and power for extension modules is listed in the following table.

Item						Note
Power supply voltage		Vdc	19	24	30	Normal startup and operation
Input current		A			0.85	Input: 24Vdc, 100% output
5 V/GND		mA		600		The total power of outputs 5V/GND and 24 V/GND s 15W. Max. output power: 15W (sum of all branches) Prompting: no 24V output.
Output 24V/GND		mA		500		
current						

Digital Inputs & Outputs

Input Characteristic And Specification


The input characteristic and specs are shown as follows:

Item		High-speed input I General input terminal terminals X0-X7
Input mode		Source mode or sink mode, set through sis terminal
Input voltage		24Vdc
Input impedance Input ON External circuit resistance <4000 Input OFF External circuit resistance >24kΩ Digital filter X0-X7 have digital filtering function. Filtering time: 0, Filtering time 8, 16, 32 or 64ms (selected through user programme)		
function	Hardware Input terminals other than X0 – X7 are of hardware filter filtering. Filtering time: about 10ms	
<ul style="list-style-type: none">High-speed functionCommon terminal		<ul style="list-style-type: none">X0-X7: high-speed counting, interrupt, and pulse catchingX0-X5: up to 10kHz counting frequency The sum of input frequency should be less than 60kHzOnly one common terminal: COM

The input terminal act as a counter has a limit over the maximum frequency. Any frequency higher than that may result in incorrect counting or abnormal system operation. Make sure that the input terminal arrangement is reasonable and external sensors used are proper.

Input connection example

The following diagram shows an example of IVC1S-1614MDR, which realizes simple positioning control. The positioning signals from the PG are input through high speed counting terminals X0 and X1, the limit switch signals that require high-speed response can be input through high-speed terminals X2 – X7. Other user signals can be input through any other input terminals.

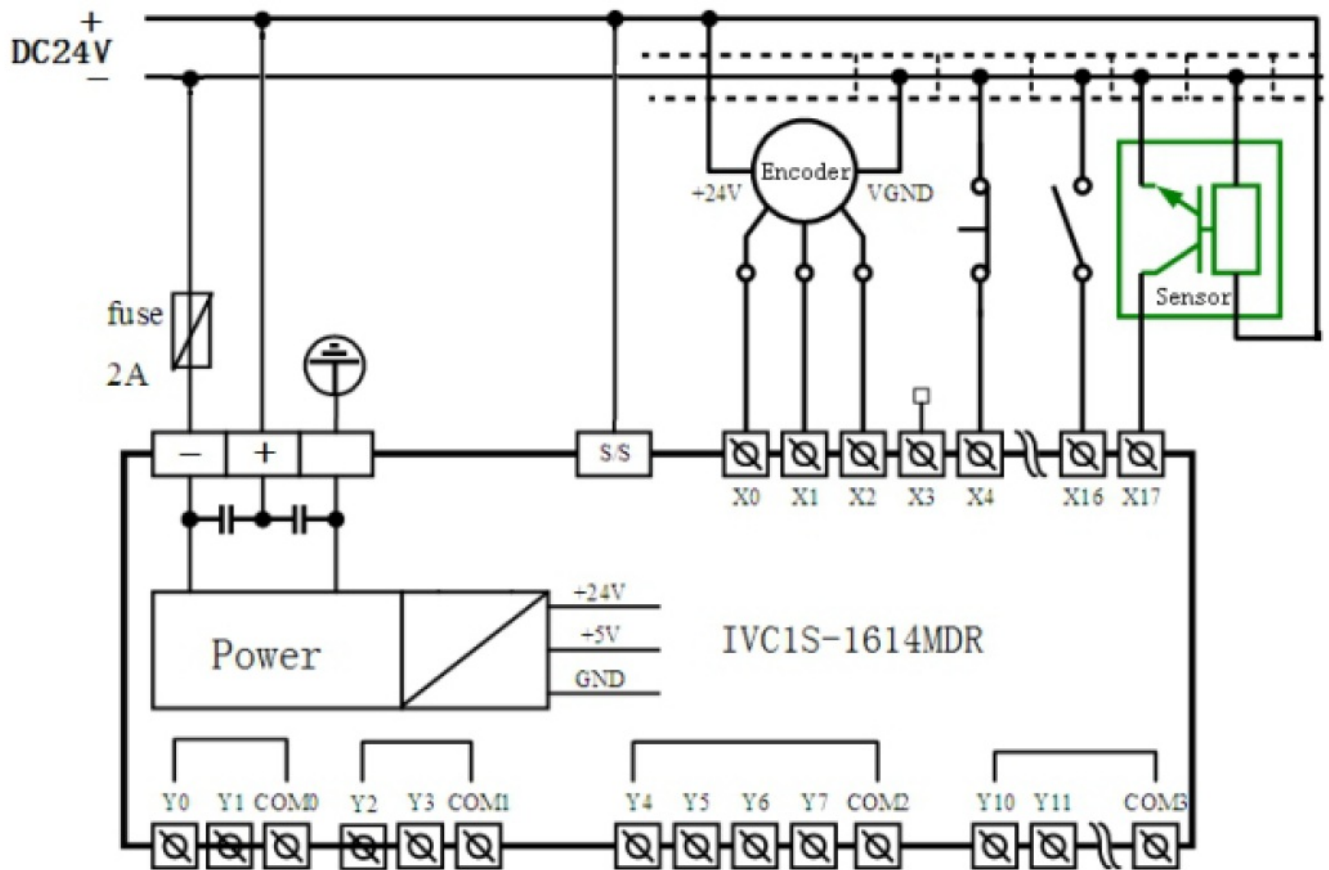

Output Characteristic And Specification

The following table shows the relay output and transistor output.

Item	Relay output	Transistor output
Output mode	When output state is ON, the circuit is closed; OFF, open	
Common terminal	Divided into multiple groups, each with a common terminal Comm, suitable for control circuits with different potentials. All common terminals are isolated from each other	
Voltage	220Vac· 24Vdc no polarity requirement	24Vdc, correct polarity required
Current	Accord with output electric specs (see following Table)	
Difference	High driving voltage, large current	Small driving current, high frequency, long lifespan
Application	Loads with low action frequency such as intermediate relay, contactor coil, and LEDs	Loads with high frequency and long life, such as control servo amplifier and electromagnet that action frequently


The electric specs of outputs is shown in the following table.

Item		Relay output terminal	Transistor output terminal
Switched voltage		Below 250Vac, 30Vdc 5-24Vdc	
Circuit isolation		By Relay	PhotoCoupler
Operation indication		Relay output contacts closed, LED on	LED is on when optical coupler is driven
Leakage current of open circuit			Less than 0.1mA/30Vdc
Minimum load		2mA/5Vdc	5mA (5-24Vdc)
Maximum output current	Resistive load	2A/1 point; 8A/4 points, using a COM; 8A/8 points, using a COM	Y0/Y1: 0.3A/1 point. Others: 0.3A/1 point, 0.8A/4 point, 1.2A/6 point, 1.6A/8 point. Above 8 points, total current increases 0.1A at each point increase
	Inductive load	220Vac, 80VA	Y0/Y1: 7.2W/24Vdc Others: 12W/24Vdc
	Illumination load	220Vac, 100W	Y0/Y1: 0.9W/24Vdc Others: 1.5W/24Vdc
Response time		OFF -> ON	20ms Max
			Y0/Y1: 10us

	QN-, QF F	20ms Max	Others: 0.5ms
YO, Y1 max. output frequency			Each channel: 100kHz
Output common terminal		YO/ Y1-COM0; Y2/Y3-COM 1. After Y4, Max 8 terminals use one isolated common te rminal	
Fuse protection		No	

Output connection example

The following diagram shows an example of IVC1S-1614MDR. Different output groups can be connected to different signal circuits with different voltages. Some (like YO-COMO) are connected to the 24Vdc circuit powered by local 24V-COM, some (like Y2-COM1) are connected to the 5Vdc low voltage signal circuit, and others (like Y4-Y7) are connected to the 220Vac voltage signal circuit.

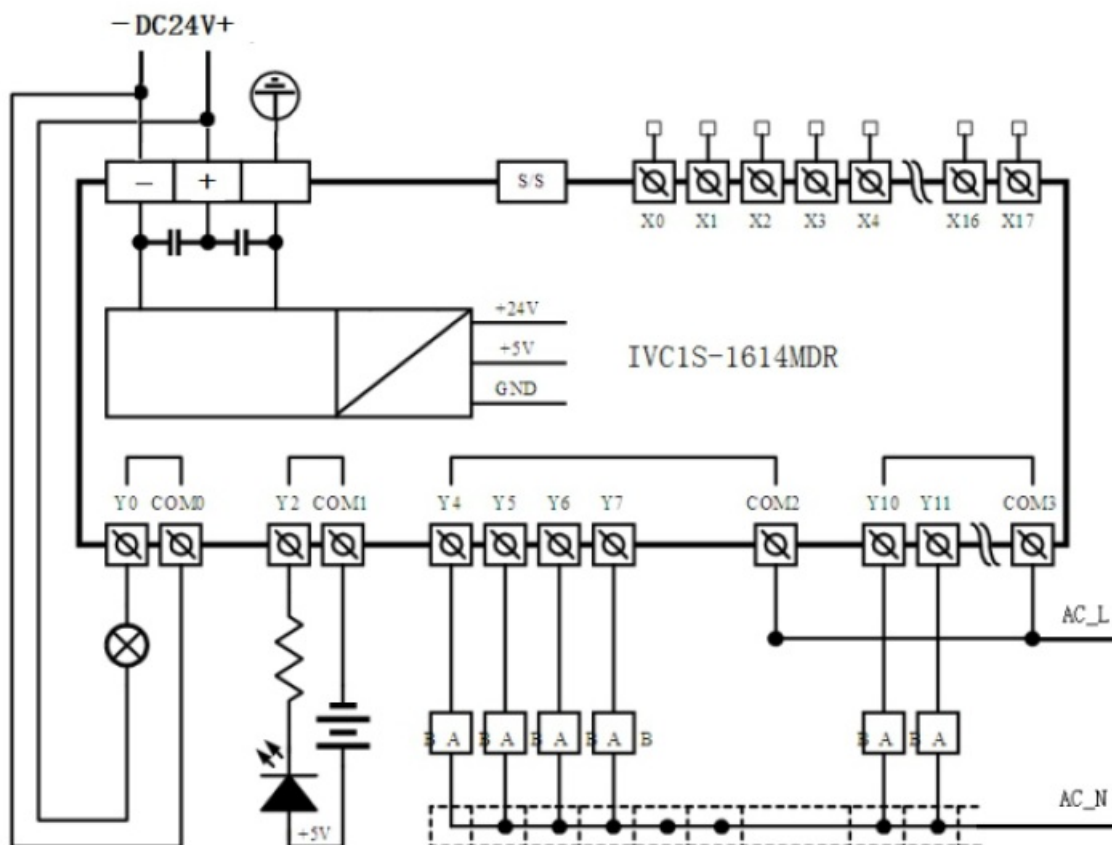


Communication Port

IVC1S series PLC basic module has three serial asynchronous communication ports: PORT0 and PORT1.

Supported baud rates:

- 115200 bps
- 9600 bps
- 57600 bps
- 4800 bps
- 38400 bps
- 2400 bps
- 19200 bps
- 1200 bps

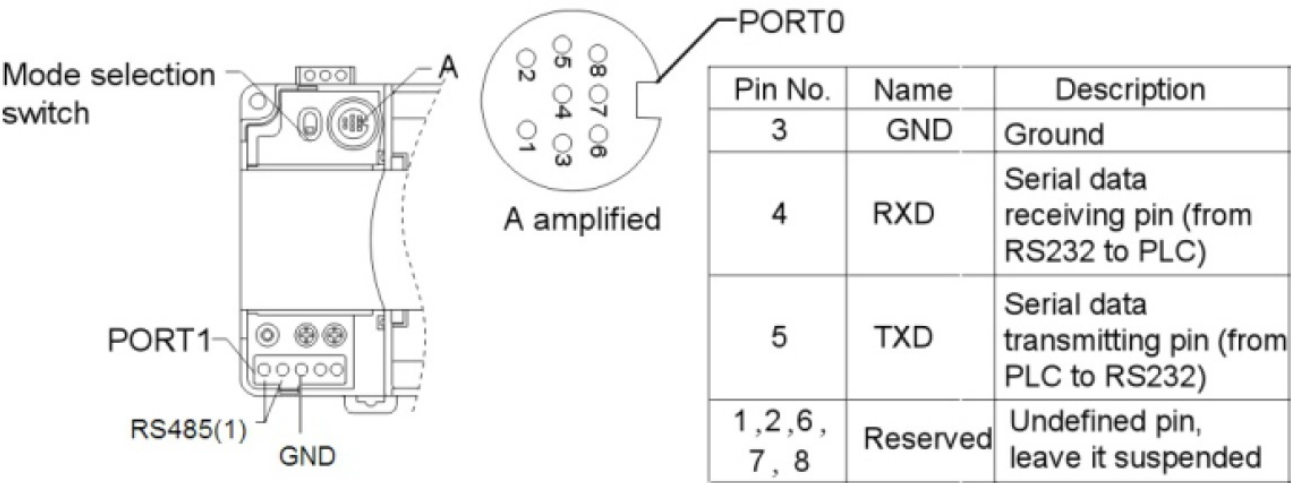

As a terminal dedicated to user programming, PORT0 can be converted to programming protocol through the mode selection switch. The relationship between PLC operation status and the protocol used by PORT0 is shown in the following table.

Mode selection switch position	status	PORT0 operation protocol
ON	Running	Programming protocol, or Modbus protocol, or free-port protocol, or N: N network protocol, as determined by user program and system configuration
OFF	Stop	Converted to programming protocol

PORT1 is ideal for connection with equipment that can communicate (such as inverters). With Modbus protocol or RS485 terminal free protocol, ii can control multiple devices through the network. Its terminals are fixed with screws. You can use a shielded twisted-pair as the signal cable to connect communication ports by yourself.

Installation

PLC is applicable to Installation category II, Pollution degree 2.


Installation Dimensions

Model	Length	Width	Height	Weight
IVC1S-0806MDR, IVC1S-0806MDT	135mm	90mm	1.2mm	440g
IVC1S-1006MDR, IVC1S-1006MDT				440g
IVC1S-1208MDR , IVC1S-1208MDT				455g
IVC1S-1410MDR, IVC1S-1410MDT				470g
IVC1S-1614MDR, IVC1S-1614MDT	150mm	90mm	71.2mm	650g
IVC1S-2416MDR, IVC1S-2416MDT	182mm	90mm	71.2mm	750g
IVC1S-3624MDR, IVC1S-3624MDT	224.5mm	90mm	71.2mm	950g
IVC1S-2424MDR, IVC1S-2424MDT	224.5mm	90mm	71.2mm	950g

Installation Method


DIN rail mounting

Generally you can mount the PLC onto a 35mm-wide rail (DIN), as shown in the following figure.

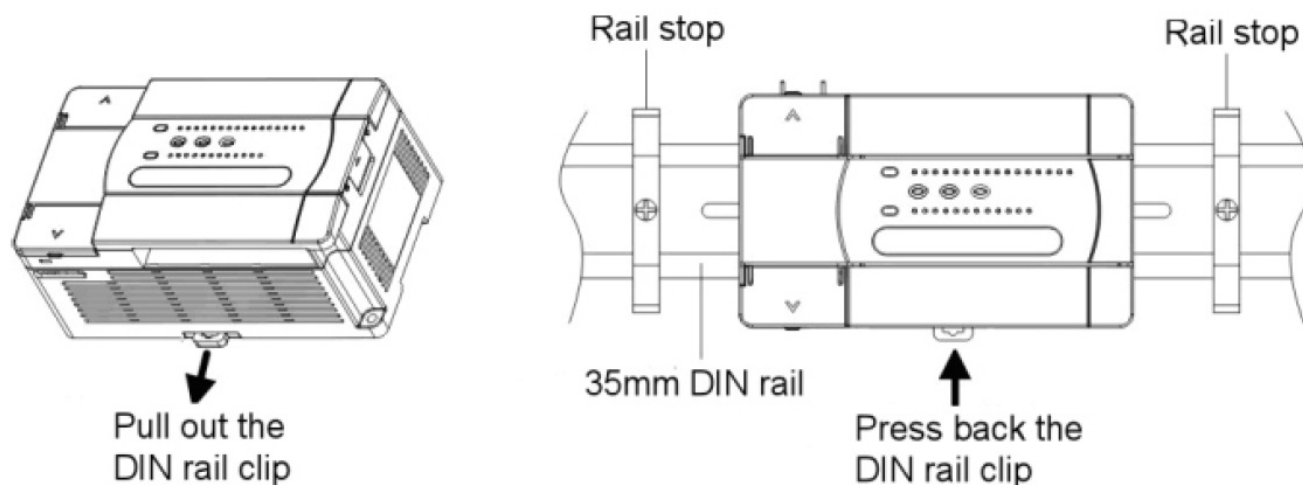

Screw fixing

Fixing the PLC with screws can stand greater shock than DIN rail mounting. Use M3 screws through the mounting holes on PLC enclosure to fix the PLC onto the backboard of the electric cabinet, as shown in the following figure.

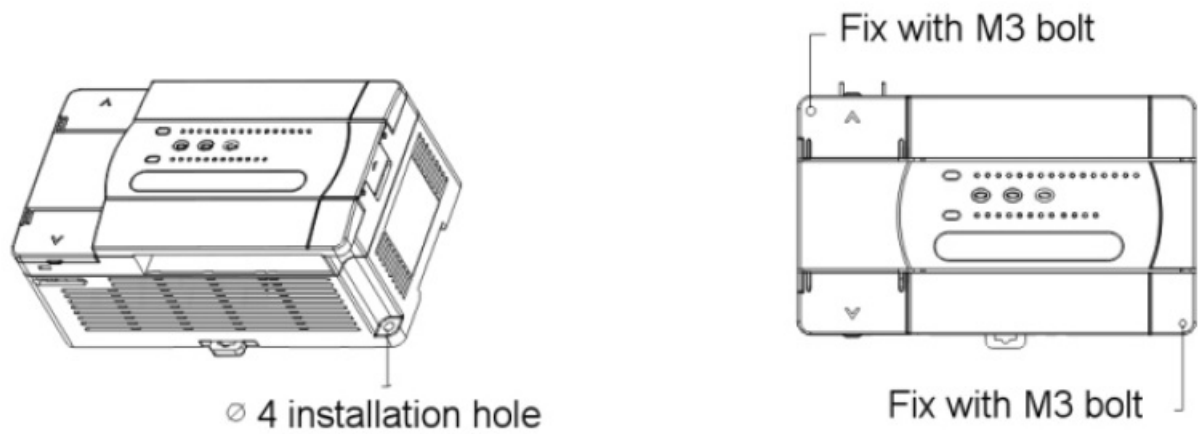


Cable Connection And Specification


Connecting power cable and grounding cable

The connection of DC power is demonstrated in the following figure.

We suggest you wire a protection circuit at the power supply input terminal. See the figure below.

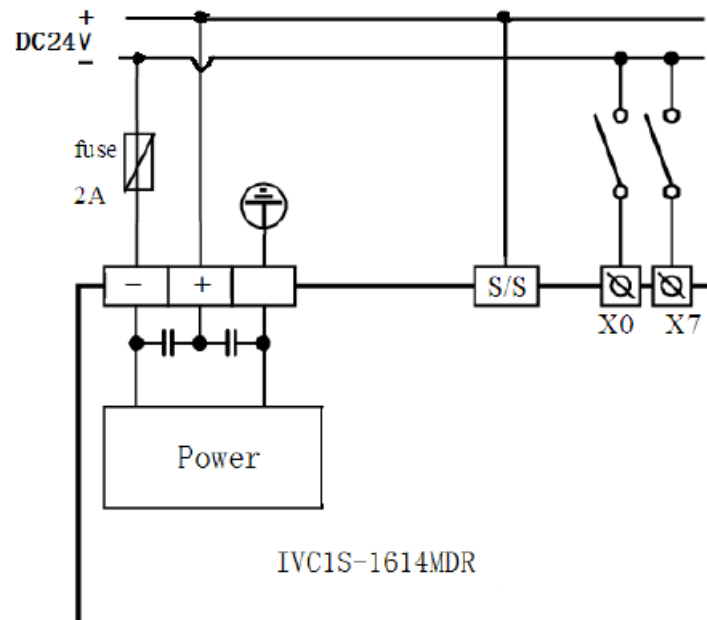

Connect the PLC @ terminal to the grounding electrode. To ensure reliable grounding cable connection, which makes the equipment safer and protects it from EM I. use AWG12-16 cable, and make the cable as short as possible. Use independent grounding. Avoid sharing route with the grounding cable of other equipment (particularly those with strong EMI). See the following figure.

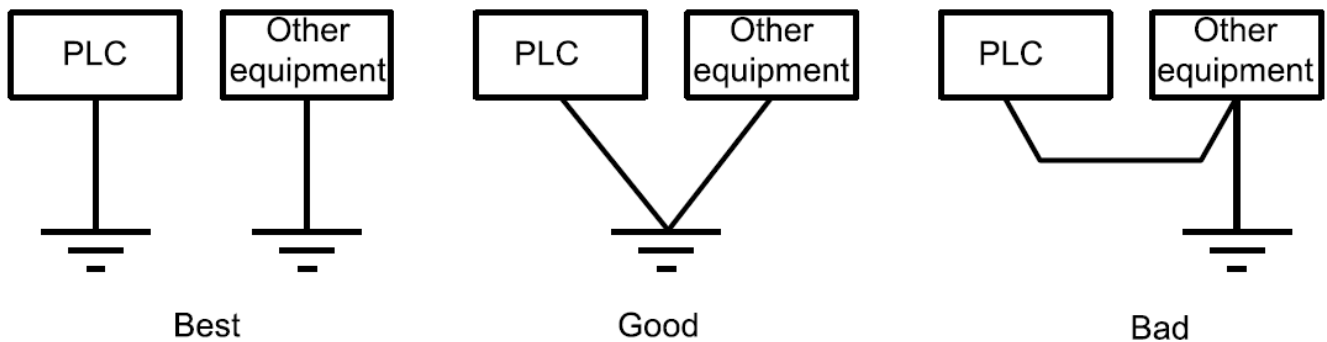


Cable specification

When wiring a PLC, use multi-strand copper wire and ready-made insulated terminals to ensure the quality. The recommended model and the cross-sectional area of the cable are shown in the following table.

Wire	Cross-sectional area	Recommended model	Cable lug and heat-shrink tube
power cable	1.0- 2.0mm ²	AWG12, 18	H1.5/14 round insulated lug, or tinned cable lug
Earth cable	2.0mm ²	AWG12	H2.0/14 round insulated lug, or tinned cable end
Input signal cable (X)	0.8- 1.0mm ²	AWG18, 20	UT1-3 or OT1-3 solderless lug C13 or C14 heat shrinkable tube
Output signal cable (Y)	0.8- 1.0mm ²	AWG18, 20	

Fix the prepared cable head onto the PLC terminals with screws. Fastening torque: 0.5-0.8Nm.
The recommended cable processing-method is shown in the following figure.

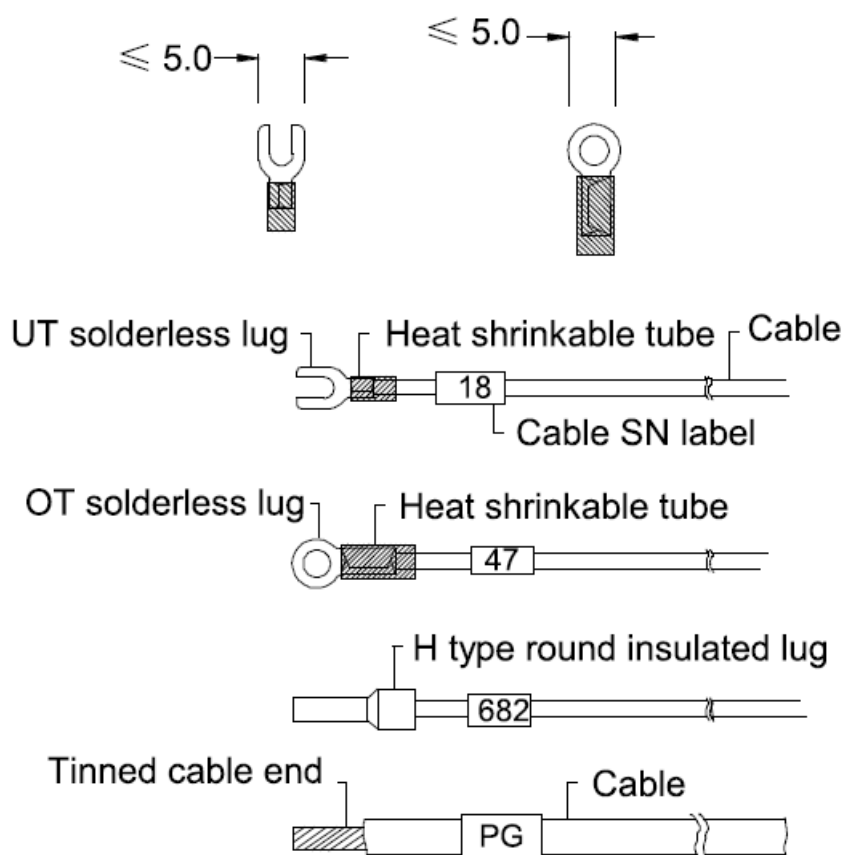

Power-on Operation And Maintenance

Startup

Check the cable connection carefully. Make sure that the PLC is clear of alien objects and the heat dissipation channel is clear.

1. Power on the PLC, the PLC POWER indicator should be on.
2. Start the Auto Station software on the host and download the compiled user program to the PLC.
3. After checking the download program, switch the mode selection switch to the ON position, the RUN indicator should be on. If the ERR indicator is on, the user program or the system is faulty. Loop up in the IVC1S series PLC Programming Manual and remove the fault.
4. Power on the PLC external system to start system debugging.

Routine Maintenance Do the following:

1. Ensure the PLC a clean environment. Protect it from aliens and dust.
2. Keep the ventilation and heat dissipation of PLC in good condition.
3. Ensure that the cable connections are reliable and in good condition. .

Warning

1. Never connect the transistor output to an AC circuit (like 220Vac). The design of the output circuit must abide by the requirements of electric parameters, and no over-voltage or over-current is allowed.
2. Use the relay contacts only when necessary, because the life span of relay contacts depends largely on its action times.
3. The relay contacts can support loads smaller than 2A. To support larger loads, use external contacts or mid-relay.
4. Note that the relay contact may fail to close when the current is smaller than 5mA.

Notice

1. The warranty range is confined to the PLC only.
2. Warranty period is 18 months, within which period INVT conducts free maintenance and repairing to the P the normal operation conditions.
3. The start time of warranty period is the delivery date of the product, of which the product SN is the sole basis of judgment. PLC without a product SN shall be regarded as out of warranty.
4. Even within 18 months, maintenance will also be charged in the following situations:
Damages incurred to the PLC due to mis-operations, which are not in compliance with the User Manual;
Damages incurred to the PLC due to fire, flood, abnormal voltage, etc;
Damages incurred to the PLC due to the improper use of PLC functions.
5. The service fee will be charged according to the actual costs. If there is any contract, the contract prevails.
6. Please keep this paper and show this paper to the maintenance unit when the product needs to be repaired.
7. If you have any question, please contact the distributor or our company directly.


Shenzhen INVT Electric Co., Ltd.

Address: INVT Guangming Technology Building, Songbai Road, Malian, Guangming District, Shenzhen, China

Website: www.invt.com

All rights reserved. The contents in this document are subject to change without notice.

Documents / Resources

	<p>invt IVC1S Series Micro Programmable Logic Controller [pdf] User Manual</p> <p>IVC1S Series Micro Programmable Logic Controller, IVC1S Series, Micro Programmable Logic Controller, Programmable Logic Controller, Logic Controller, Controller</p>
---	--

[Manuals+](#).