



iPGARD SA-DPN-8D-P 8 Port DP Secure KVM Switch User Guide

[Home](#) » [iPGARD](#) » iPGARD SA-DPN-8D-P 8 Port DP Secure KVM Switch User Guide 

Contents

- [1 iPGARD SA-DPN-8D-P 8 Port DP Secure KVM Switch User Guide](#)
- [2 EDID LEARN](#)
- [3 HARDWARE INSTALLATION](#)
- [4 TECHNICAL SPECIFICATIONS](#)
- [5 NOTICE](#)
 - [5.1 Read More About This Manual & Download PDF:](#)
 - [5.2 Documents / Resources](#)
 - [5.2.1 References](#)

iPGARD SA-DPN-8D-P 8 Port DP Secure KVM Switch User Guide



EDID LEARN

The KVM switch is designed to learn a connected monitor's EDID upon power up. In the event of connecting a new monitor to the KVM a power recycle is required.

The KVM switch will indicate the unit's EDID learn process is active by flashing the front panel's LEDs in

sequential order.

Starting with the LED above button “1” on the front panel, each LED will flash green for approximately 10 seconds upon beginning the EDID learn. Once all the LEDs stop flashing, the LEDs will cycle and the EDID learn will be complete.

If the KVM switch has more than one video board (such as dual-head and quad-head models), then the unit will continue to learn the EDIDs of the connected monitors and indicate the progress of the process by flashing the next port selection green and blue push-button LEDs respectively.

A monitor must be connected to the video output port located in the console space at the back of the KVM switch during the EDID learn process.


If the read EDID from the connected monitor is identical to the current stored EDID in the KVM switch, then the EDID learn function will be skipped.

HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the
2. Use DisplayPort cables to connect the DisplayPort output ports from each computer to the corresponding DP IN ports of the unit.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on each computer to the respective USB ports of the unit.
4. Optionally, for CAC models, connect a CAC (Common Access Card, Smart Card Reader) to the CAC port in the user console interface.
5. Optionally, connect a stereo audio cable (3.5 mm to 5 mm) to connect the audio output of the computer(s) to the audio in ports of the unit.
6. Connect monitor(s) to the DP OUT console port of the unit using DisplayPort cable(s).
7. Connect a USB keyboard and mouse in the two USB console
8. Optionally, connect stereo speakers to the audio out port of the
9. Finally, power on the secure KVM switch by connecting a 12-VDC power supply to the power connector, and then turn on all the

Note: You can connect two monitors to the dual-head KVM switch. The computer connected to port 1 will always be selected by default after power up.

Note: You can connect up to 8 computer to the 8 port KVM

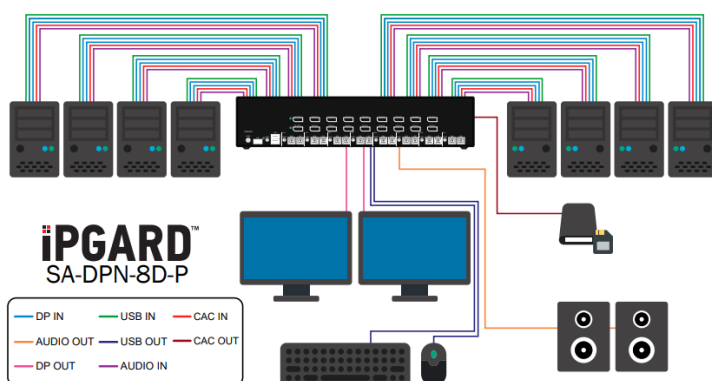

A full Manual can be downloaded from
www.ipgard.com/documentation/

TECHNICAL SPECIFICATIONS

VIDEO	
Host Interface	(16) DisplayPort 20-pin F
User Console Interface	(2) DisplayPort 20-pin F
Max Resolution	3840 x 2160 @ 60Hz
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Signal Type	USB 1.1 and 1.0 Keyboard and Mouse only. USB 2.0 for CAC connection.
USB Connectors	(16) USB Type B
User Console Interface	(2) USB Type A for keyboard/mouse connections; (1) USB Type A for CAC
AUDIO	
Input	(8) Connector stereo 3.5 mm female
Output	(1) Connector stereo 3.5 mm female

POWER	
Power Requirements	12V DC, 3A power adapter with center-pin positive polarity
ENVIRONMENT	
Operating Temp	32° to 104° F (0° to 40° C)
Storage Temp	-4° to 140° F (-20° to 60° C)
Humidity	0-80% RH, non-condensing
CERTIFICATIONS	
Security Accreditation	Common Criteria Validated To NIAP, Protection Profile PSS Ver. 4.0
OTHER	
Emulation	Keyboard, mouse, and video
User Controls	Front-panel buttons

WHAT'S IN THE BOX


PART NO.	QTY	DESCRIPTION
SA-DPN-8D-P	1	8-Port DH Secure DisplayPort KVM with Audio and CAC Support
PS12VDC2A	1	12-VDC, 2-A power adapter with center-pin positive polarity.
	1	Quick Start Guide

NOTICE



The information contained in this document is subject to change without notice. iPGARD makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for a particular purpose. iPGARD will not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent from iPGARD, Inc

Read More About This Manual & Download PDF:

Documents / Resources

	<p>iPGARD SA-DPN-8D-P 8 Port DP Secure KVM Switch [pdf] User Guide SA-DPN-8D-P 8 Port DP Secure KVM Switch, SA-DPN-8D-P, 8 Port DP Secure KVM Switch, D P Secure KVM Switch, KVM Switch, Switch</p>
--	---

References

-  [Home | iPGARD](#)
-  [Documentation | iPGARD](#)
- [User Manual](#)