




iPGARD SA-HDN-2S 2 Port DP-HDMI to DP-HDMI Secure KVM Switch User Guide

[Home](#) » [iPGARD](#) » iPGARD SA-HDN-2S 2 Port DP-HDMI to DP-HDMI Secure KVM Switch User Guide 

iPGARD™

SA-HDN-2S
2 Port DP/HDMI to DP/HDMI
secure KVM switch
User Guide

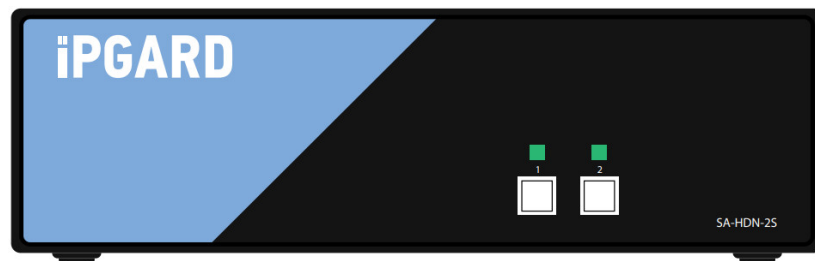

Advanced 2-Port Secure Single-head DP/HDMI to DP/HDMI KVM Switch with Audio
A full manual can be downloaded from www.ipgard.com/documentation/

Contents

- [1 HARDWARE INSTALLATION](#)
- [2 EDID LEARN](#)
- [3 TECHNICAL SPECIFICATIONS](#)
- [4 WHAT'S IN THE BOX](#)
- [5 Documents / Resources](#)
- [6 Related Posts](#)


HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the computers.

2. Use DisplayPort or HDMI cables to connect the DisplayPort or HDMI output ports from each computer to the corresponding DP/HDMI IN ports of the unit.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on each computer to the respective USB ports of the unit.
4. Optionally, connect a stereo audio cable (3.5 mm to 3.5 mm) to connect the audio output of the computer(s) to the audio in ports of the unit.
5. Connect monitor(s) to the DP/HDMI OUT console port of the unit using DisplayPort or HDMI cable(s).
6. Connect a USB keyboard and mouse to the two USB console ports.
7. Optionally, connect stereo speakers to the audio out port of the unit.
8. Finally, power on the secure KVM switch by connecting a 12-VDC power supply to the power connector, and then turn on all the computers.

Note: You can connect one monitor to the single-head KVM switch. The computer connected to port 1 will always be selected by default after powering up.

Note: You can connect up to 2 computers to the 2 port KVM.

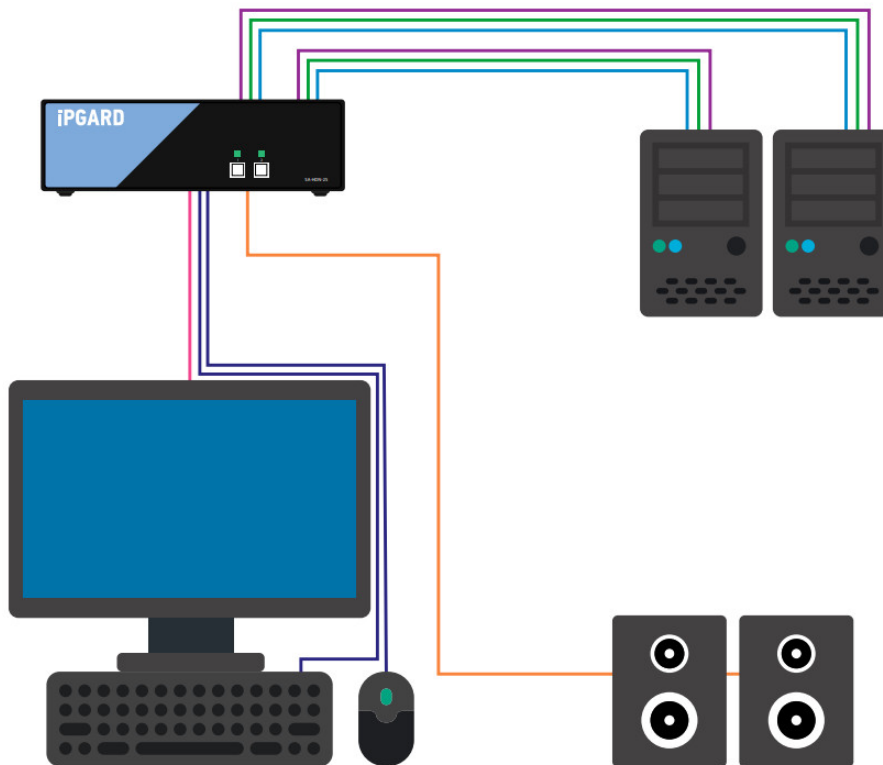

EDID LEARN

The KVM switch is designed to learn a connected monitor's EDID upon power up. In the event of connecting a new monitor to the KVM a power recycle is required.

The KVM switch will indicate the unit's EDID learn process is active by flashing the front panel's LEDs in sequential order. Starting with the LED above button "1" on the front panel, each LED will flash green for approximately 10 seconds upon beginning the EDID learn. Once all the LEDs stop flashing, the LEDs will cycle and the EDID learn will be complete.

If the KVM switch has more than one video board (such as dual-head and quad-head models), then the unit will continue to learn the EDIDs of the connected monitors and indicate the progress of the process by flashing the next port selection green and blue push-button LEDs respectively.

A monitor must be connected to the video output port located in the console space at the back of the KVM switch during the EDID learning process.

If the read EDID from the connected monitor is identical to the current stored EDID in the KVM switch, then the EDID learn function will be skipped.

TECHNICAL SPECIFICATIONS

VIDEO	
Host Interface	(2) DisplayPort 20-pin F; (2) HDMI 19-pin F
User Console Interface	(1) DisplayPort 20-pin F; (1) HDMI 19-pin F
Max Resolution	3840 x 2160 @ 60Hz
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.
USB	
Signal Type	USB 1.1 and 1.0 Keyboard and Mouse only
USB Connectors	(2) USB Type B
User Console Interface	(2) USB Type-A for keyboard/ mouse connections
AUDIO	
Input	(2) Connector stereo 3.5 mm female
Output	(1) Connector stereo 3.5 mm female
POWER	

Power Requirements	12V DC, 3A power adapter with center-pin positive polarity
ENVIRONMENT	
Operating Temp	32° to 104° F (0° to 40° C)
Storage Temp	-4° to 140° F (-20° to 60° C)
Humidity	0-80% RH, non-condensing
CERTIFICATIONS	
Security Accreditation	Common Criteria Validated To NIAP, Protection Profile PSS Ver. 4.0
OTHER	
Emulation	Keyboard, mouse, and video
User Controls	Front-panel buttons

WHAT'S IN THE BOX

PART NO.	QTY	DESCRIPTION
SA-HDN-2S	1	2-Port SH Secure DP/HDMI to DP/HDMI KVM with Audio
PS12VDC3A	1	12VDC, 3A power adapter with center-pin positive polarity.
	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. iPGARD makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for a particular purpose. iPGARD will not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without prior written consent from iPGARD, Inc.



DP/HDMI IN	USB IN
AUDIO OUT	USB OUT
DP/HDMI OUT	AUDIO IN

20170518

DESIGNED AND MADE IN THE USA


Toll-Free: (888)-994-7427

Phone: (702) 800-0005

Fax: (702)-441-5590

WWW.IPGARD.COM

Documents / Resources

	iPGARD SA-HDN-2S 2 Port DP-HDMI to DP-HDMI Secure KVM Switch [pdf] User Guide SA-HDN-2S, 2 Port DP-HDMI to DP-HDMI Secure KVM Switch, SA-HDN-2S 2 Port DP-HDMI to DP-HDMI Secure KVM Switch, DP-HDMI, Secure KVM Switch, Switch
---	--

[Manuals+](#)