

 **J-TECH DIGITAL**
JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter



J-TECH DIGITAL JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter User Manual

[Home](#) » [J-TECH DIGITAL](#) » J-TECH DIGITAL JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter User Manual



Contents

- [1 J-TECH DIGITAL JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter](#)
- [2 Safety Instructions](#)
- [3 Introduction](#)
- [4 Package Contents](#)
- [5 Ports and Interfaces](#)
- [6 Features](#)
- [7 Specifications](#)
- [8 Connection Diagram](#)
- [9 Troubleshooting Common Issues](#)
- [10 Maintenance](#)
- [11 Warranty](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)



J-TECH DIGITAL JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter



- J-TECH DIGITAL INC. 9807 EMILY LANE STAFFORD. TX 77477 TEL: 1-[888-610-2818](tel:888-610-2818)

- E-MAIL: SUPPORT@JTECHDIGITAL.COM

Scan the QR code below or visit

<https://resource.jtechdigital.com/products/3181> to view and access detailed digital resources regarding this unit.



Safety Instructions

Before using this product, please carefully read the following safety instructions to ensure its proper use and keep this manual for future reference:

- To prevent electric shock, do not attempt to open the product.
- Only qualified personnel should perform any repairs or maintenance.
- Always place the product on a stable, flat surface to prevent it from falling.
- Do not expose the product to water, moisture, or high-humidity environments to avoid the risk of damage.
- To prevent damage from direct sunlight or high temperatures, do not expose the product to such environments.
- Do not place the product near heat sources like radiators, heat registers, stove, or other heat-producing apparatus.
- Do not place any objects on top of the product to avoid damage.
- Use only the attachments and accessories specified by the manufacturer.
- During lightning storms or prolonged periods of disuse, unplug the power supply to prevent damage.

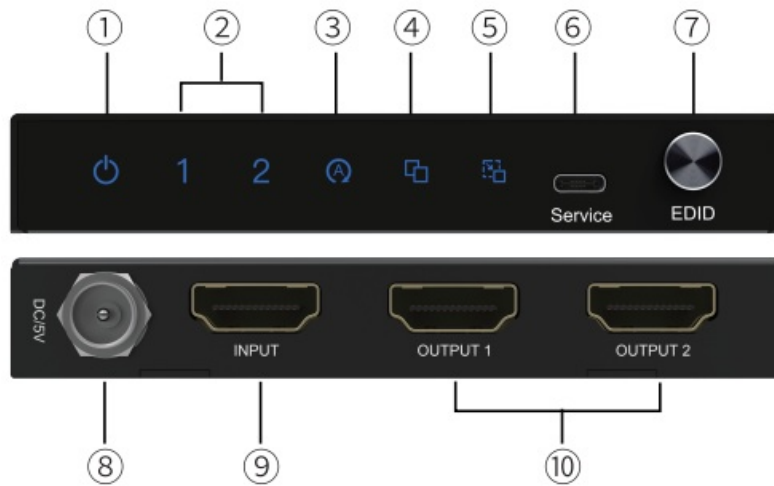
Introduction





The HDMI™ 4K splitter 1×2 lets you share two HDMI™ displays or projectors with an HDMI-enabled audio / video source device. With support for Ultra HD (4K@60Hz) the HDMI™ splitter ensures astonishing picture quality, four times the resolution of HD 1080p@60 Hz. The 4K splitter is also backward compatible with previous HDMI™ revisions, supporting 1080p / 720p HDMI™ video resolution devices. Even if you don't require 4K video today, the HDMI™ 4K Splitter 1×2 ensures you'll be ready to take advantage of tomorrow's display technology. It features three different EDID modes auto/copy/downscaler for meet needs of different display occasion.

Package Contents

- Main Unit
- Power Adapter with screw
- User manual

Ports and Interfaces



1.  Power LED
2. 1-2: HDMI Output 1-2 LED Indicator
3.  Auto Mode LED Indicator ON is in Normal Auto EDID Mode, which gets the Lower Resolution and Audio Format of both outputs for the Input Device to output the Signal to Fit Both Outputs
4.  Copy Mode LED Indicator ON is In Copy EDID Mode, which copies the output resolution and Audio Format for the Input Device to output the Signal
5.  Downscaler Mode LED Indicator ON is In Downscaler EDID Mode, which can downscale the Input 4K Resolution to 1080p by the FHD (1080p) Display and 4K Resolution to the 4K Displays Simultaneously.
6. Service: Firmware update for factory use only
7. EDID: Three EDID select buttons for downscaler, auto and copy
8. DC/5V: DC 5V Input
9. INPUT: HDMI Input port
10. OUTPUT 1-2: HDMI Output 1-2 port

Features

- Supports three different EDID modes auto/copy/downscaler When turn to the auto EDID function, it can get the lower resolution and audio format of the both output for the input device to output the signal to fit both outputs When turn to the copy EDID function, it can copy the output resolution and audio format for the input device to output the signal, if the other output device supported resolution is lower than the output1 connected device, it will downscaler the resolution and keep the same audio format, HDR format and deep color with the output1, or it will output same signal to both outputs When turn to the downscaler function, it can downscale the input 4K resolution to 1080p by the FHD (1080p) displays and 4K resolution to the 4K displays simultaneously.
- Supports full 3D video format
- Supports high resolution up to 4K@60Hz YUV 4:4:4
- Supports HDCP 2.2 and HDCP 1.4
- Supports High Dynamic Range (HDR) video
- Supports 600MHz/6Gbps per channel (18Gbps all channels) bandwidth
- Supports 12bit per channel (36bit all channels) deep color
- Supports uncompressed audio such as LPCM

- Supports compressed audio such as DTS, Dolby Digital (including DTS-HD Master Audio ™ and Dolby TrueHD)

Specifications

Input Ports	HDMI x 1
Output Ports	HDMI x2
Vertical Frequency Range	50/60Hz
Video Amplifier Bandwidth	6.0Gbps/600MHz per channel(18Gbps all channels)
Interlaced(50&60Hz)	480i,576i,1080i
Progressive(50&60Hz)	480p,576p, 720p,1080p,4K@24/30Hz,4K@50/60Hz
Limited Warranty	1 Year Parts and Labor
Operating Temperature	0 C to 70C
Storage Humidity	5% to 90% RH non-condensation
Power Supply	5V DC@1A
Power Consumption (Max)	5W
Splitter Unit Cert	FCC,CE,RoHS
Power Supply Cert	FCC,CE,RoHS
Power Adapter Standard	US, EU, UK, AU Standard etc.
Dimension(LxWxH)	90•44•14mm
Net Weight	87g
Material	Metal
User Manual	English Version

Note: Specifications are subject to change without notice.

Connection Diagram



Troubleshooting Common Issues

Problems	Causes	Solutions
	Is the power supply	Please check if the power adapter is connected properly and switch on the power on/off button
The power light is off and	properly connected and	
product is not working	The power on/off button is	
	on	
Screen splash	HDMI cable may not be HDMI 2.0 specification, or the cable is too long	Please use the standard HDMI 2.0 cable. The input/output cable length does not exceed 5M 4K/60Hz 4:4:4, 4K@30Hz/1080p can reach 10M to 10M
No picture out only sound out or output pink screen	Maybe the displays can't support the resolution or the HOC	Change to a lower resolution of the input HDMI signal to check whether this issue or not; if not, maybe the customer should change a non-HOC input source or HOC-compliant displays or devices
	Maybe the downscaler	The downscaler function only support the 4K@60Hz 4:4:4 and 4:2:0(HOR 10) signal downscale, to 1080p signal, or there will not have picture output to the FHD TV, the customer need change a supported downscaler signal input.
No picture out to a FHD	function can't support the	
TV when connecting a	input signal, such as	
4K@60Hz source, and	4K@60Hz 4:2:2 HOR	
have normal picture to the	signal(Oolby Vision) or	
4K HOR-supported TV at	When connecting one FHD	
the same time	TV with a fixed 4K@60Hz	
	output device	

Maintenance

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner, or benzene to clean.

Warranty

If your product does not work properly because of a defect in materials of workmanship, our company (referred to as "the warrantor") will, for the length of the period indicated as below, "Parts and Labor (1) Year, which starts with

the date of original purchase ("Limited Warranty period"), at its option either (a) repair your product with new or refurbished parts, or (b) replace it with a new or a refurbished product. The decision to repair or replace will be made by the warrantor. During the "Labor" limited warranty period, there will be no charge for labor. During the "Parts" warranty period, there will be no charge for parts. You must mail in your product during the warranty period. This Limited Warranty is extended only to the original purchaser and only covers products purchased as new. A purchase receipt or other proof of original purchase date is required for Limited Warranty service.

Mail-In Service

When shipping the unit, carefully pack and send it prepaid, adequately insured, and preferably in the original carton. Include a letter detailing the complaint and provide a day time phone and/or email address where you can be reached.

Limited Warranty Limits and Exclusions

This Limited Warranty ONLY COVERS failures due to defects in material or workmanship and DOES NOT COVER normal wear and tear or cosmetic damage. The Limited Warranty ALSO DOES NOT COVER damages that occurred in shipment, or failures which are caused by products not supplied by the warrantor, or failures which result from accidents, misuse, or abuse, neglect, and mishandling, misapplication, alteration, faulty installation, set-up adjustments, mis-adjustment of consumer controls, improper maintenance, power line surge, lightning damage, modification, or service by anyone other than a Factory Service center or other Authorized Servicer, or damage that is attributed to acts of God.

- WWW.JTECHDIGITAL.COM

PUBLISHED BY J-TECH DIGITAL INC.

- 9807 EMILY LANE
- STAFFORD, TX 77477
- TEL: 1-[888-610-2818](tel:888-610-2818)
- E-MAIL: SUPPORT@JTECHDIGITAL.COM

Documents / Resources

	<p>J-TECH DIGITAL JTD-3181, JTECH-SP12M18G 18G MRO HDMI Splitter [pdf] User Manual JTD-3181, A57_2PET0102YM-1, JTD-3181 JTECH-SP12M18G 18G MRO HDMI Splitter, JTD-3181 JTECH-SP12M18G, 18G MRO HDMI Splitter, MRO HDMI Splitter, HDMI Splitter, Splitter</p>
---	--

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.