

# Jingzun HB-X7C Bluetooth Keyboard User Manual

[Home](#) » [Jingzun](#) » Jingzun HB-X7C Bluetooth Keyboard User Manual 

## Jingzun

Wireless keyboard user manual  
Package included Instruction manual\*  
Wireless keyboard™1 USB charging cable™

### Contents


- 1 Product model specification
- 2 Getting Started Guide
- 3 Bluetooth keyboard connection steps;
- 4 Keyboard shortcut function description
- 5 10S13 system touchpad gestures
- 6 Attention
- 7 Energy saving sleep mode
- 8 Troubleshooting
- 9 Documents / Resources
  - 9.1 References

### Product model specification

1. Bluetooth Interface Standard
2. Operating Distance Available: 10 meters
3. Modulation System: GFSK
4. Operating Voltage: 3.0-4.2V
5. Working Current: <8mA (When the touchpad is working)
6. Standby Current: <0.3mA
7. Sleeping Current: <40  $\mu$  A
8. Charging Current: 100mA/200mA (Backlight)

9. Standby Time: >100 days
10. Charging Time: 2-3 hours
11. Lithium Battery Capacity: 220mA/480mA (Backlight)
12. Sustainable Working Time: more than 100/30 hours
13. Lithium Battery Life: 1 years
14. Key Strength:  $80 \pm 10g$
15. Key Life: 5 Million Stroke
16. Operating Temperature:  $-10^{\circ}\text{C} \pm 55^{\circ}\text{C}$

## Getting Started Guide

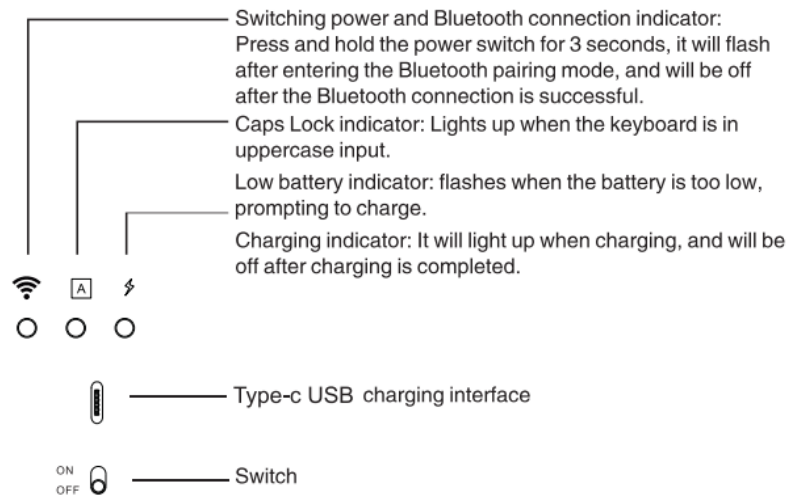


## Bluetooth keyboard connection steps;

1. After the power switch is turned to the ON position, the power indicator light s on for 3 seconds, the Bluetooth indicator starts o flash, and the keyboard automatically enters the pairing mode.



2. Open and unlock your tablet and click on the \*Settings” icon.

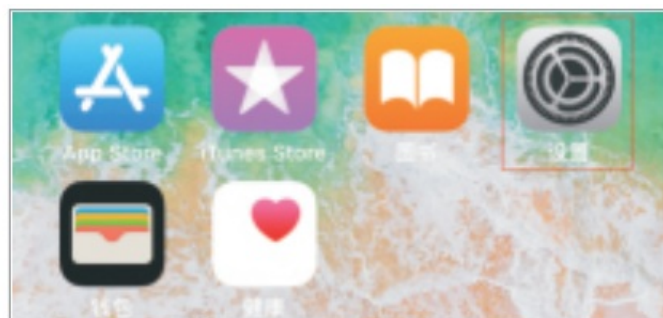

3. the settings menu, click on the “Bluetooth” menu.



4. Turn on the Bluetooth switch and the tablet will automatically search for Bluetooth keyboard devices.



























5. Discover the Bluetooth keyboard device:  
Bluetooth Keyboard \*\*\*, and click on it, the Bluetooth keyboard will automatically Connect.



6. After the Bluetooth connection is successful, the pairing indicator is off, and "Connected" will appear in the list of Bluetooth devices.




## Keyboard shortcut function description

	Back to Home page		Brightness –		Brightness +
	search		Screen keyboard		Screen capture
	Previous track		Pause/Play		Next track
	Mute Key		Volume-		Volume+
	Select all		Copy		Paste
	Touchpad on/off		Language switching		Lock screen +FN
	E-MAIL		Bluetooth pairing		Backlight brightness adjustment
	Go back to last page		Cut		Function key

After switch system push above multimedia function show :

**Notice 1** : This keyboard is 3-system universal keyboard , after confirming using it then push FN+Q/W/E to choose suitable system .










**Notice 2** : Only backlight kind keyboard has this button .

 Color adjust : total 7 kind colors circulating

**Backlight model** : Single push backlight key actualize three kinds models .

1. Single color backlight ( RGB )
2. Breathing light
3. Backlight turn off . RGB backlight switch : Under single color model situation , push FN+backlight key to switch .
4. Backlight lightness : Under single color model situation , push backlight key + direction upward arrow key , backlight lightness increase ; Push backlight + direction downward arrow key , backlight lightness reduce.

## 10S13 system touchpad gestures

Sliding finger 	Moving the cursor	Single finger tap 	Left mouse button
Single finger fast double click without loose drag 	Left click to select the target drag	Two-finger tapping 	Right mouse button
Two-finger vertical /horizontal movement 	Vertical/horizontal scrolling	Three-finger tap 	Middle mouse button
Three fingers move up at the same time 	Recent task window switch	Three fingers move down at the same time 	Back to Home page
Three fingers sliding left /right at the same time 	Active window left /right slide switch		

IOS 13 mouse function is enabled: “Settings” – “Accessibility” – “Touch” -“Auxiliary Touch” – “Open”

## Attention

1. When not use for long time, suggest to close keyboard, in order to prolong battery lift.
2. in order to get longer battery lift ,;charging before keyboard power light flashes, charging time must be better more than 2hours.

## Energy saving sleep mode

When keyboard not use will be enter sleep mode after 15minutes,keyboard indicator will off, press any key 5s to wake it up when need use again ,then keyboard indicator willtum on.

## Troubleshooting

1. Make sure the power is turned on
2. Ensure keyboard operable distance
3. Make sure the battery has power
4. Ensure the device' s Bluetooth was tured on
5. Ensure the wireless keyboard was connected with the Bluetooth
6. Ensure the wireless keyboard paired successfully

## Cleaning

Washing, alcohol or a similar cleaning agent decontamination keyboard.

## Charging

When battery is low, the power indicator blinking, means need to charge the keyboard

1. Connect Genuine Parts USB Type C cable B port to keyboard cradle
2. Connect USB Type C cable A port to power adapter or computer USB port .
3. When charging , charge indicator lights will blinking, after full lights automatically turn off

### 'FCC Caution:

Any changes of modifications not expressly approved by the party responsible for compliance could void the user's ability to operate this device.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. 'This device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation.

**Note:** This device has been tested and found to comply with the limits for a Class B digital device under Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used following the instructions, may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment.

---

## Documents / Resources



**[Jingzun HB-X7C Bluetooth Keyboard](#)** [pdf] User Manual  
HB-X7C Bluetooth Keyboard, HB-X7C, Bluetooth Keyboard, Keyboard

## References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.