




**ESP8266-PROG
Raspberry Pi
Expansion
Board Suitable**

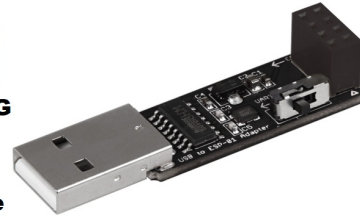

JOY-it ESP8266-PROG Raspberry Pi Expansion Board Suitable User Guide


[Home](#) » [JOY-It](#) » JOY-it ESP8266-PROG Raspberry Pi Expansion Board Suitable User Guide 

Contents

- [1 JOY-it ESP8266-PROG Raspberry Pi Expansion Board Suitable](#)
- [2 Specifications](#)
- [3 FAQ](#)
- [4 GENERAL INFORMATION](#)
- [5 CONFIGURATION OF SOFTWARE ENVIRONMENT](#)
- [6 CONNECTION & PROGRAMMING OF ESP8266](#)
- [7 FURTHER INFORMATION](#)
- [8 SUPPORT](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)



JOY-it ESP8266-PROG Raspberry Pi Expansion Board Suitable

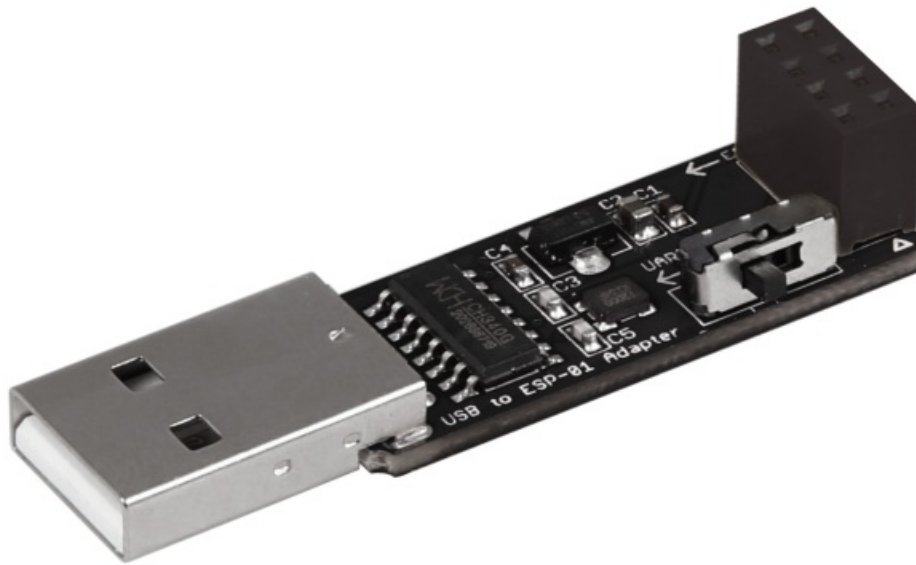

Specifications

- Product Name: ESP8266-PROG
- Compatibility: ESP8266
- Manufacturer: Simac Electronics Handel GmbH
- Published Date: 2023.12.22
- Manufacturer's Website: www.joy-it.net

FAQ

Q: What should I do if I encounter unexpected problems during use?

A: Please do not hesitate to contact us for assistance with any unexpected issues.

Q: How can I dispose of my old appliance?

A: Follow the provided guidelines for proper disposal or return options as per electro-law (ElektroG).


Help for the programming and use of a ESP8266

GENERAL INFORMATION


Dear customer,
thank you for choosing our product. In the following, we will show what you should note at the commissioning and during the usage.
Should you encounter any unexpected problems during use, please do not hesitate to contact us.

CONFIGURATION OF SOFTWARE ENVIRONMENT


First of all, you must prepare the Arduino development environment for the use with the ESP8266.
For that, enter in the global settings of the program the following URL as an additional board manager URL:
https://arduino.esp8266.com/stable/package_esp8266com_index.json

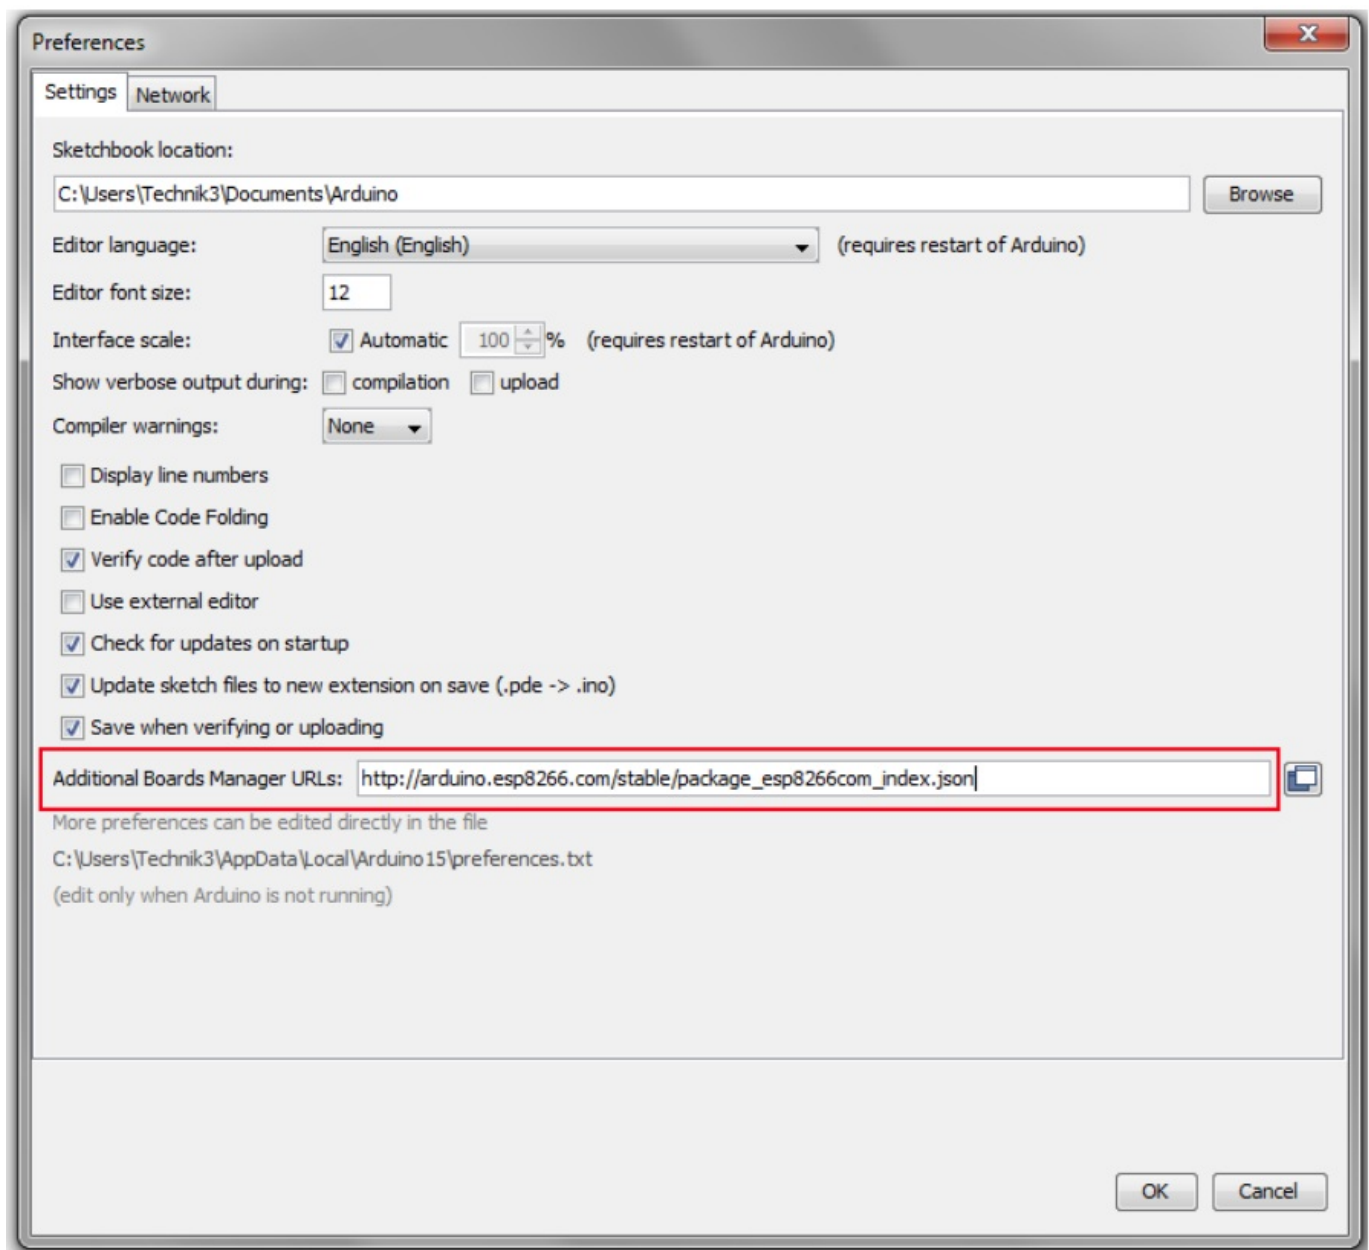

After that, the additional board library must be installed. For that open the board manager and install the ESP8266-library.

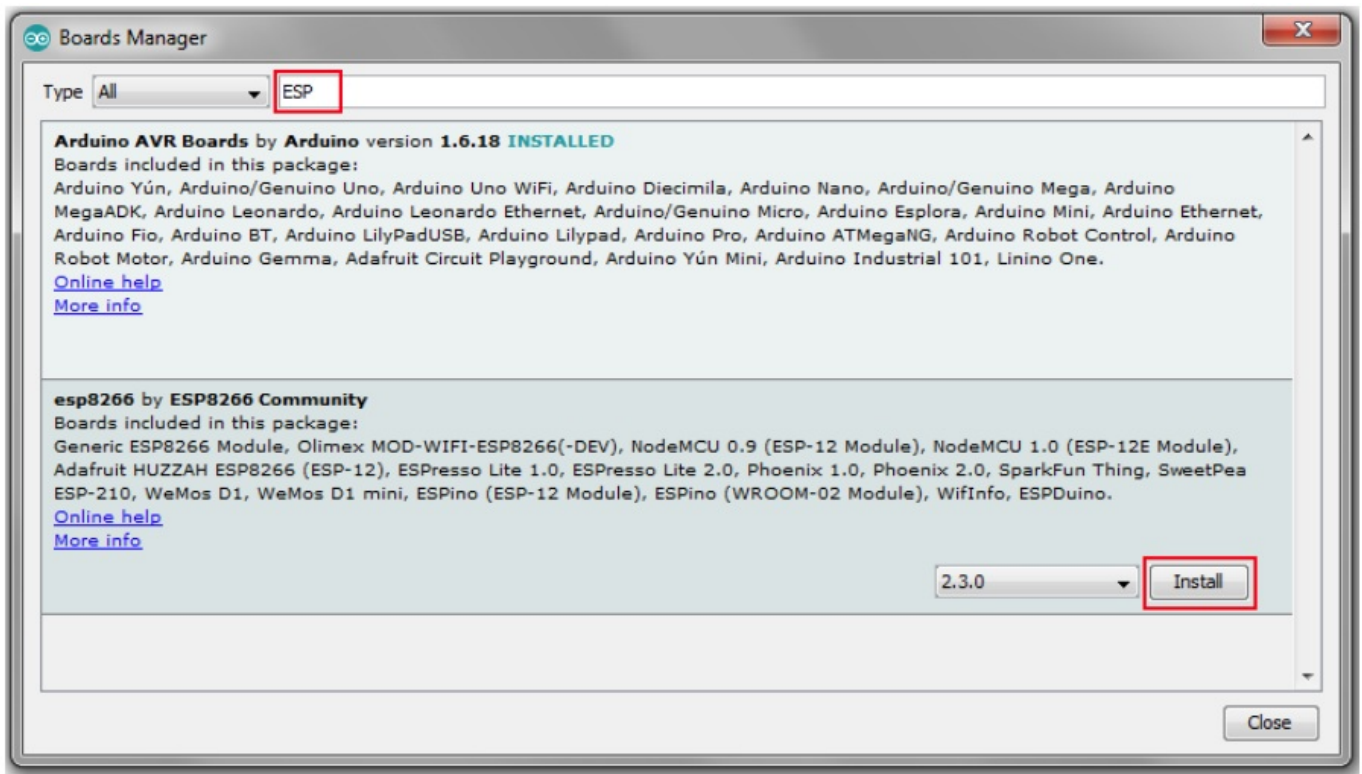


As soon as the board is successfully installed, you can select the Generic ESP8266 Module in the list of available boards.

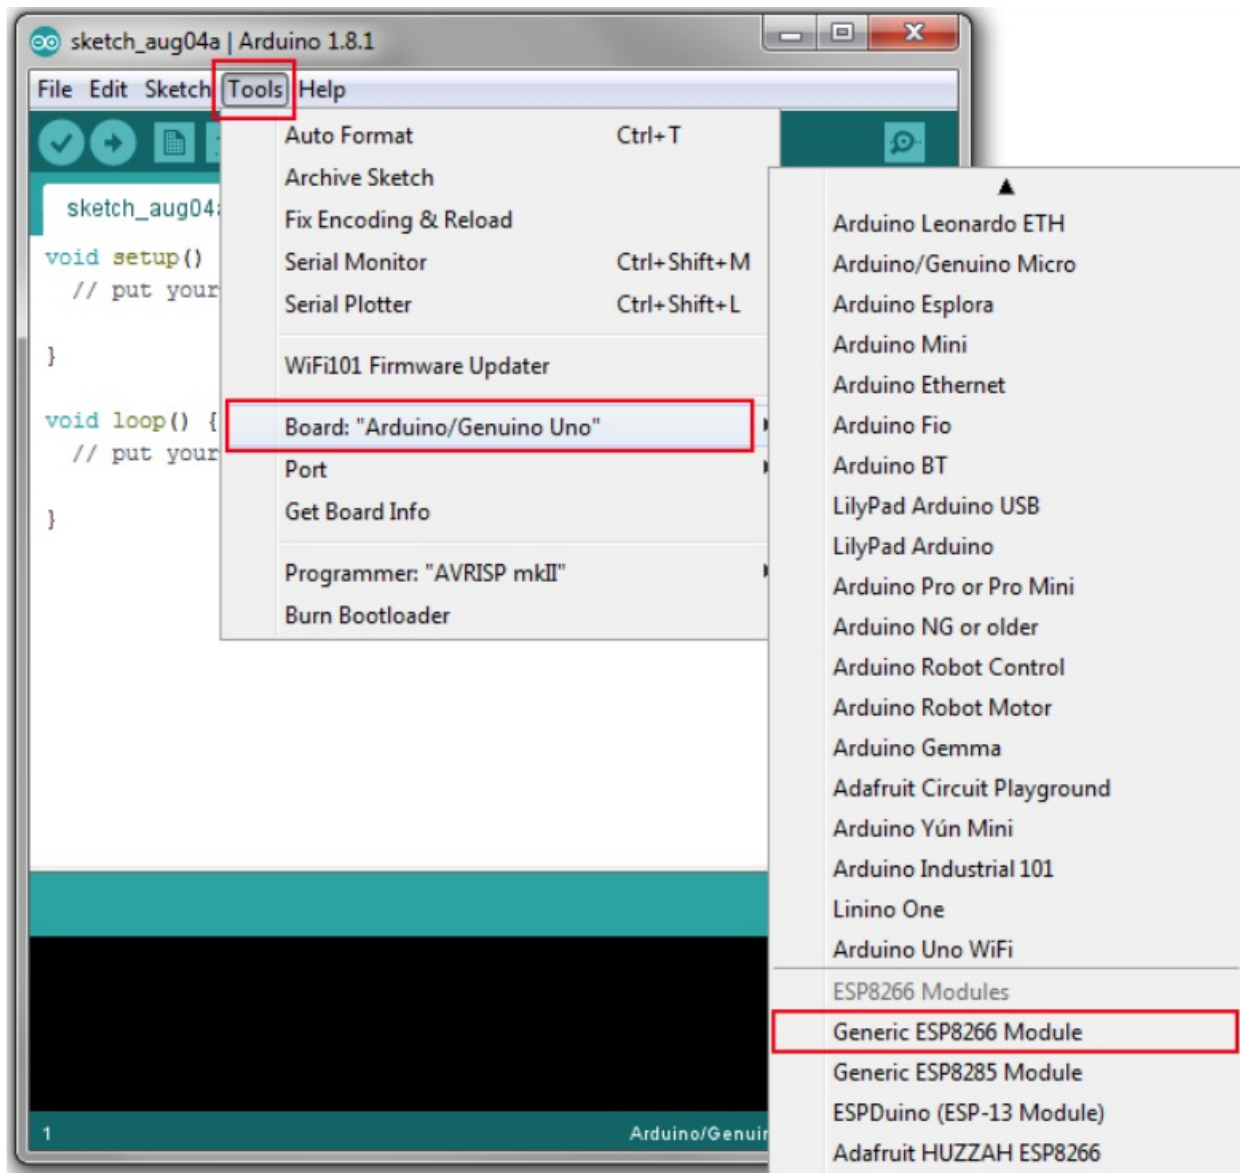

Your Arduino development environment is now ready for the use with the ESP8266.

CONNECTION & PROGRAMMING OF ESP8266

Put now the ESP8266 in the yellow connector of the programming module like shown in the picture.

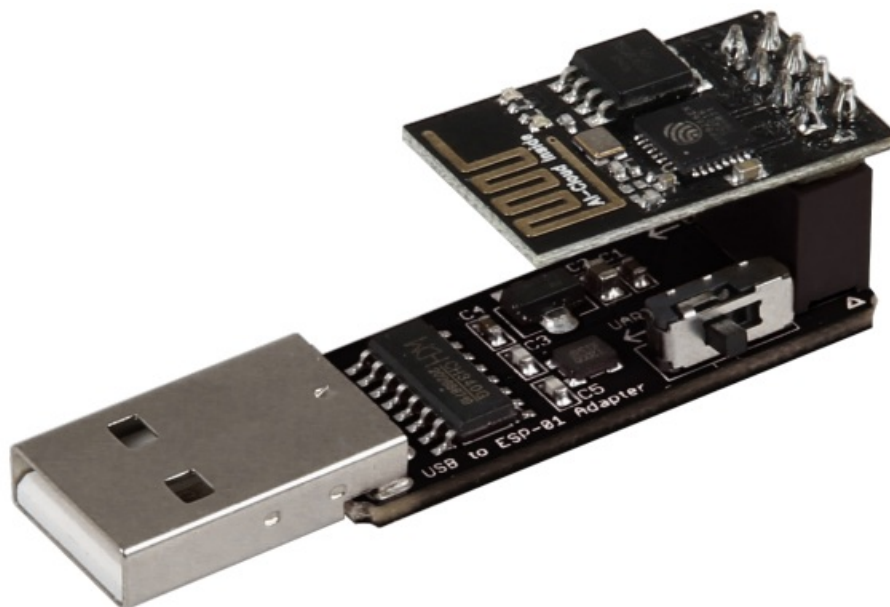

- Next to the yellow connector is a small switch (also shown in the picture). Note that the switch should be on Prog if you want to program your ESP8266. For the regular use, you must set the switch to UART.
- Connect the programming module with the USB-interface of your computer.
- If the automatic installation of drivers fails, you have to install the drivers manually.
- In this case download the driver installation program and install the drivers. Note that the accurate port is selected in the Arduino settings.
- The in the Arduino environment installed ESP-package provides some code examples for the use of this module. These examples are highly qualified for the entering into the programming of the ESP8266.

FURTHER INFORMATION

Our information and redemption obligation according to the electro-law (ElektroG)

Symbol on electrical and electronic products :

This crossed-out bin means that electrical and electronic products do not belong into the household waste. You must hand over your old appliance to a registration office. Before you can hand over the old appliance, you must remove used batteries and accumulators which are not enclosed by the device.

Return options :

As the end user, you can hand over with the purchase of a new device your old appliance (which has essentially the same functions as the new one) free of charge for disposal. Small devices which do not have outer dimensions greater than 25 cm can be submitted independently of the purchase of a new product in normal household quantities.

Possibility of restitution at our company location during our opening hours :

Simac GmbH, Pascalstr. 8, D-47506 Neukirchen-Vluyn

Possibility of restitution nearby :

We send you a parcel stamp with which you can send us your old appliance free of charge. For this possibility, you must contact us via e-mail at service@joy-it.net or via telephone.

Information about packaging:

Please package your old appliance safe during transport. Should you not have a suitable packaging material or you do not want to use your own material, you can contact us and we will send you an appropriate package.

SUPPORT

If any questions remain open or problems arise after your purchase, we are available by e-mail, telephone and with a ticket support system to answer these.

E-Mail: service@joy-it.net

Ticket-System: <http://support.joy-it.net>


Telephone: +49 (0)2845 9360 – 50 (Mon. – Thur.: 08:45 – 17:00 o'clock, Fri.: 08:45 – 14:30 o'clock)

For further information visit our website: www.joy-it.net

www.joy-it.net

Simac Electronics Handel GmbH Pascalstr. 8 47506 Neukirchen-Vluyn

Documents / Resources

	<p>JOY-it ESP8266-PROG Raspberry Pi Expansion Board Suitable [pdf] User Guide ESP8266-PROG, ESP8266-PROG Raspberry Pi Expansion Board Suitable, Raspberry Pi Expansion Board Suitable, Pi Expansion Board Suitable, Board Suitable</p>
---	---

References

- [ITnet | Servizi di Colocation e Cloud](#)
- [Joy-IT Helpdesk](#)
- [For Makers and Professionals | Joy-IT](#)
- arduino.esp8266.com/stable/package_esp8266com_index.json
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.