

**JOYO JW-06 Digital Wireless Transmitter and Receiver**



# JOYO JW-06 Digital Wireless Transmitter and Receiver Owner's Manual

[Home](#) » [JOYO](#) » JOYO JW-06 Digital Wireless Transmitter and Receiver Owner's Manual 

## Contents

- [1 JOYO JW-06 Digital Wireless Transmitter and Receiver](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Parameters](#)
- [5 Specifications](#)
- [6 Product diagram and introduction](#)
- [7 How to use?](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

# JOYO

**JOYO JW-06 Digital Wireless Transmitter and Receiver**



## Product Information

### Specifications

- **Compliance:** Part 15 of FCC Rules
- **RF Exposure:** Meets general requirements

### Product Usage Instructions

#### Safety Precautions

- **Caution:** Any changes or modifications not approved by the manufacturer could void the device's operation authority.

#### Operating Conditions

- This device complies with FCC Rules Part 15. It must not cause harmful interference and should accept any received interference.

#### RF Exposure

- The device has been evaluated to meet the general RF exposure requirements for safe usage.

### FAQ (Frequently Asked Questions)

**Q: Can I make modifications to the device?**

**A:** No, any changes or modifications not explicitly approved by the manufacturer could void your authority to operate the equipment.

**Q: What are the operating conditions for this device?**

**A:** The device complies with Part 15 of the FCC Rules, meaning it should not cause harmful interference and must accept any received interference.

**Important Notes**

1. Do not disassemble or repair this product by yourself.
2. Do not use or store it in any heat sources, or damp, dusty areas.
  - Avoid violent vibrations or shock.
3. Do not drop this product otherwise, it may malfunction.
4. Do not use alcohol or other cleaning fluids to clean this product.
5. This product works normally only when the transmitter and the receiver pair up. it supports one-to-one and one-to-many.
6. Please make sure the transmitter and the receiver keep a distance away from the wireless router or other wireless pieces of equipment during use.
7. Obstructions between the transmitter and the receiver may affect the transmission distance.
8. A maximum of 4 sets of transmitters and receivers can be used in the same place simultaneously.
9. If the red indicator flickers during use, it indicates a low battery, please charge it in time.
10. Please turn off the transmitter and the receiver when not in use.
11. Due to one of the characteristics of lithium battery, there is a slight self-discharge. Therefore please charge the battery in 2 months to avoid low battery protection.
12. The lithium battery capacity decreases gradually after repeated charge and discharge, so this product's lifetime will be affected within an acceptable degree with time.

**Parameters**


- **48K/24bit** audio resolution
- **Delay time:** <6mS
- **Transmission distance**> 20m
- **Frequency response:** 10Hz-22KHz+-1dB
- **Distortion:** <0.02%(@1KHz-10dBFS)
- **Wireless frequency band:** 5.8GHz ISM frequency band.
- **Anti-interference method:** Frequency hopping
- **Channel bank's quantity:** 4
- **Built-in lithium battery:** Over 5 hrs battery life once fully charged

**Specifications**

- **Battery: Rechargeable** lithium battery 3.7V/500mAh

- **Frequency response:** 10Hz-22KHz
- **Wireless frequency band:** 5.8GHz ISM frequency band
- **Dimensions:** 84\*100\*46mm
- **Attached accessories:** Owner's manual, USB cable

## Product diagram and introduction

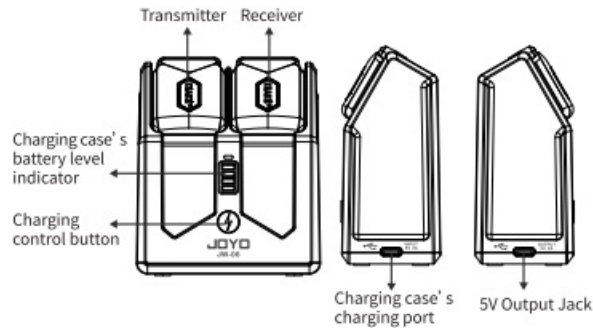

## How to use?

### 1. Check up the battery level of the charging case/ start charging


- You can start charging by pressing the charging control button, and it indicates the battery level of the charging case




### 2. Charge the charging case




### 3. Charge other portable devices via the charging case

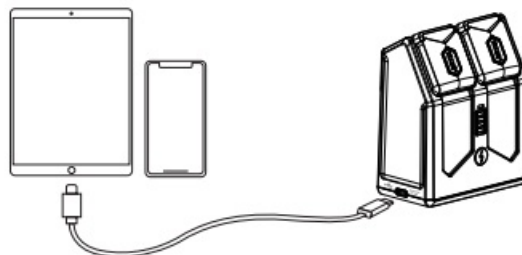

### 4. Charge the transmitter and receiver

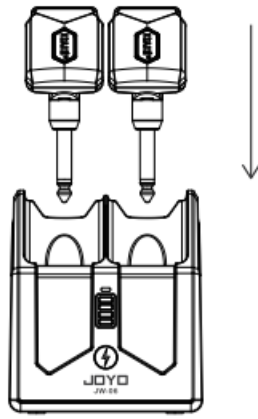


1. If the LED indicator flickers in red, it means low battery(pls charge it).
  2. Both the transmitter and receiver will be charged automatically once you plug them into the charging case, till fully charged.
  3. Both the LED indicators of the transmitter and receiver are in red during charging.
  4. The LED indicators go out once fully charged.
5. Pair up all over again— double-click the buttons
- Double-click the receiver button first, and it will flicker in red and blue alternately
  - Then double click the transmitter's button first, and it will flicker in red and blue alternately About 2 seconds later, if both of their indicators indicate blue, it means they paired successfully




6. Switch the Channel banks
1. Tap the button once, and you can switch to 1 Channel bank.
  2. The red indicator's flicker times indicate the current Channel bank.
7. Instructions for the wireless system
1. Long press the button to turn on the unit.
  2. Connect the transmitter to the guitar.
  3. Connect the receiver to the amp/mixer.

- Connect the transmitter to the guitar

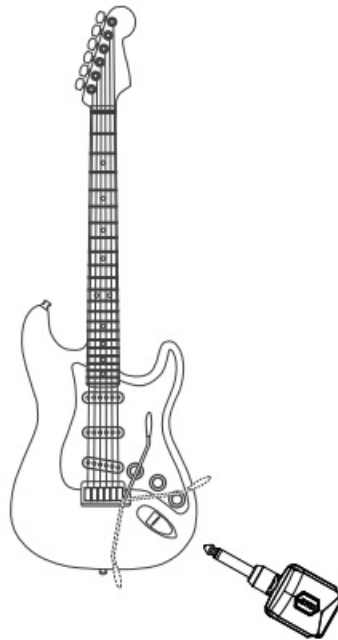


- Suitable for all electric guitars, including Stratocaster style electric guitars with vibrato system.
- Connect the receiver to the amp

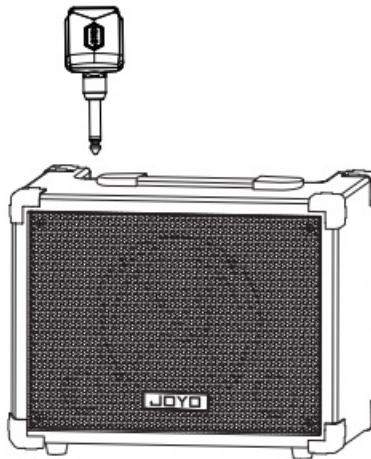

- Switch on the receiver, if its blue indicator is on, it indicates the receiver and transmitter are paired.
- If the blue indicator is flickering, it indicates they're not paired, it might be due to strong signal interference, exceeds transmission distance or the transmitter doesn't work.

#### JOYO TECHNOLOGY CO., LTD

- **Address:** 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen, 518101 China.
- [www.joyoaudio.com](http://www.joyoaudio.com) Email: [info@joyoaudio.com](mailto:info@joyoaudio.com) Tel: 0086-755-29765381

	<p><b><a href="#">JOYO JW-06 Digital Wireless Transmitter and Receiver</a></b> [pdf] Owner's Manual JW-06 Digital Wireless Transmitter and Receiver, JW-06, Digital Wireless Transmitter and Receiver, Wireless Transmitter and Receiver, Transmitter and Receiver, Receiver</p>
---	--

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.