

LAB12  
suara  
Parallel  
tubes 2 x  
50W  
Class A  
Power  
Amplifier



## Lab12 suara Parallel tubes 2 x 50W Class A Power Amplifier Owner's Manual

[Home](#) » [LAB12](#) » Lab12 suara Parallel tubes 2 x 50W Class A Power Amplifier Owner's Manual 

### Contents

- [1 Lab12 suara Parallel tubes 2 x 50W Class A Power Amplifier](#)
- [2 Specifications](#)
- [3 Product Usage Instructions](#)
- [4 Features](#)
- [5 Installation & Placement](#)
- [6 FAQs](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)

LAB12

### Lab12 suara Parallel tubes 2 x 50W Class A Power Amplifier



## Specifications

- Brand: Lab12
- Model: Suara
- Power Output: 2 x 50W
- Class: A
- Amplifier Type: Power Amplifier
- Tubes: V1 to V8 (KT150/KT120, 6n2p, 6n1p)
- Input Connectors: RCA, XLR
- Speaker Outputs: 4 ohm, 8 ohm

## Product Usage Instructions

### Unpacking

Suara should be removed from its box with care. Remove all the foam protective pieces of the box before you unpack suara. Unpack suara with your hands on both sides of the device.

### Warnings

No user serviceable parts are included inside. Do not unscrew the cover; high voltages remain after disconnecting from mains. Always use the same type of fuse for replacement.

### Installation & Placement

Place Suara on a stable surface with proper ventilation to avoid overheating. Ensure it is not exposed to direct sunlight or moisture.

### Suara Tubes Positions

Insert the tubes carefully in each position as marked. Use the matched tubes provided for balanced operation.

### Main Connections

Connect a high-grade power cable to the IEC input and your wall socket, ensuring a good ground. Connect preamplifier analog output to the RCA or XLR inputs of Suara. Connect speakers to the designated outputs based on impedance.

## IT IS YOURS!

- Thank you for selecting Lab12 suara, an audiophile Parallel tube Class A power amplifier. Every component on it is designed to provide smooth and untreated sound. It is a full tube amplifier with 4x NOS Russian driver tubes and 4xKT150 or 4xKT120 on power stage. Suara can cooperate gratefully with any preamplifier on the market and it is the perfect match for Lab12 pre1. Suara has the ability to nail you down on your couch and make you listen all your music collection again. 50 Watt of power for any pair of speakers is available but the most remarkable point is that you will receive a fluid, wide and addictive consonant sound with any choice of music style. All components are carefully chosen after hours of listening and testing, while paying great attention to every detail affecting the outcome. As every Lab12 device, suara has an ultra-solid construction with glass blasting anodized finishing and retro analogue V/U meters.
- Do not forget that your suara is totally handcrafted with perfectly matched parts of the finest selections. In order to reach the optimal performance, your suara needs at least 200 hours of listening. In this time all components go from "burn in" period to stable.
- Before setting up your new suara, we encourage you to thoroughly read this manual to properly acquaint

yourself with its features. We love music and audio devices and we have built your new device with emotion and personal treatment.

- The information contained in this manual is subject to change without notice. The most current version of this manual is available on our official website at <http://www.lab12.gr>

## **Unpacking**

Suara should be removed from its box with care. Remove all the foam protective pieces of the box before you unpack suara. Unpack suara with your hands on both sides of the device.

## **Warnings**

- No user serviceable parts are included inside. Do not unscrew the cover; high voltages remain after disconnecting from mains. In case your device requires any kind of service or upgrade, please ship or take your equipment directly to Lab12 or to one of our authorized dealers or other qualified personnel.
- Always use same type of fuse for replacement.

## **Features**

- 6550, KT88, KT120, KT150 compatible
- Dual toroidal power transformers
- Easy Manual Bias Adjustment on the back plate
- Triode / Ultra Linear selector switch
- Handcrafted custom audio grade transformers.
- No feedback design
- Special audio grade matched parts in every stage
- SRSG® implementation
- Fine symmetry® implementation
- Analog retro Nissei VU meters
- 5mm Aluminum face panel
- Five Years Guarantee


## **Installation & Placement**

- Lab12 suara should be placed on a solid, flat surface.
- You should avoid placing it near a heat source as this could compromise suara's performance and reliability.
- Carefully put the tubes in dedicated sockets. Make sure that tubes are perfectly snapped into sockets. See bellow page.
- Due to high power tubes design, suara's chassis could be hot so you should never place another hot component directly near this device. Make sure that the device has enough space to ventilate.
- Tubes will be hot, this is normal. Be careful not to touch the tubes during the operation to avoid any injuries.
- Take care of the glass blasting anodized finish of front panel with a soft cloth. No need to use any sprays or polishes. Never use cleaners containing abrasives, as this will damage the surface.

## **Suara Tubes Positions**

Insert the tubes carefully in each position. All of the tubes are marked with the position number was placed during

calibration and factory burn in of suara. All in box tubes are perfectly matched during calibration to achieve a perfect balanced operation.

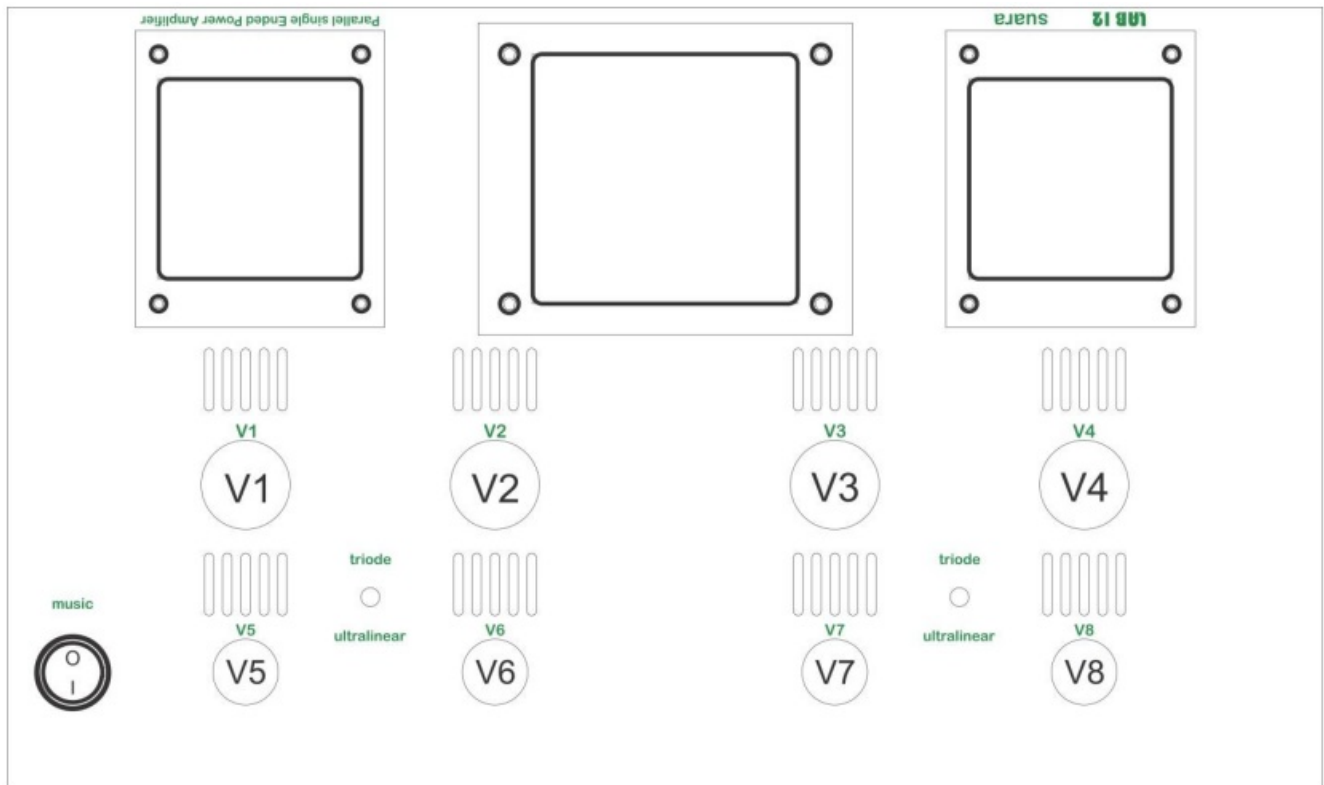

Suara Top

**V1** : KT150 / KT120  
**V2** : KT150 / KT120  
**V3** : KT150 / KT120  
**V4** : KT150 / KT120

**V5** : 6n2p  
**V6** : 6n1p  
**V7** : 6n1p  
**V8** : 6n2p

## Front Panel



- In the front panel you will see three indication LEDs and two VU meters.

- The three LEDs (C) indicate that the device is powered on.
- To the left of the 3 LEDs you will see a retro analog VU meter (A). You can accurately monitor the output level of left channel on dB scale.
- To the right of the 3 LEDs you will see a retro analog VU meter (B). You can accurately monitor the output level of right channel on dB scale.

## Rear Panel



## SUARA Rear panel

- In rear panel you will find the connection inputs and outputs.
- To the right side you will find an IEC AC input including a main fuse holder (E).
- A pair of RCA and XLR connectors for each channel (C) are the inputs of signal from your preamplifier.
- Speaker outputs for each channel (A & D) giving you the choice of 4 or 8 ohm output for perfect matching with your speaker impedance.
- Bias setting and check can easily be achieved from the back panel (B). Please find the bias procedure on page 9.

## Main connections

Connect a High-Grade Power cable to the IEC input and to your wall socket. Make sure that your wall socket provides a good ground before connecting the power cable. (Every suara is tuned and calibrated using the Lab12 Knack mk2 Power Cable. We strongly suggest using this cable).

### Connect to your Preamplifier

Connect the preamplifier analog output to the analog line level input (RCA or XLR cables) of your suara Power Amplifier. Make sure about the correct channel connections. We suggest you use a good quality interconnect cable pair.

### Connect your Speakers

Connect your speakers to the additional output of suara (connect speakers from 2 to 4 ohm at 4ohm positive bind,

speakers from 6 to 16 ohm at 8ohm bind). Make sure about the phase and polarity of speakers, always connect "plus" (red) bind of suara to "plus" (red) bind of speaker and same with black.

### **Triode / Ultra Linear**

- You can choose the operation of suara between Triode or Ultra Linear pentode mode, to tune the sound closest to your taste.
- This can be done with two toggle switches on the top cover. Position both switches towards to transformers for Triode mode or towards to tubes for Ultra Linear pentode mode.
- Always do this selection with your amplifier turned off.

### **Notes:**

Suara is fully compatible with the best octal tubes (6550, KT88, KT120, KT150). You can use any of these four types of tubes with no problem. Please always set correct bias immediately after any tube change, always use matched pairs of tubes (contact lab12).

### **Bias Setting**

**Please contact a qualified person or your local dealer if you are not sure about this procedure .**

- You can easily set the bias of each tube from the back panel of the amplifier.
- You must use a DC multimeter. Please set multimeter in 5VDC range.
- Turn on the amplifier (with connected speakers at outputs and connected inputs without signal).
- Connect minus (black) terminal of multimeter at any minus (black) speaker bind. Connect plus (red) terminal of multimeter at test point of tube you need to bias.
- Use trimming screwdriver to set the voltage at 950mVDC(KT150 setting) or 850mVDC(KT120 setting) from corresponding trimmer.
- Follow the same procedure for each tube.

**Wrong bias will destroy your tubes and possibly your amplifier. Always adjust new tubes bias current immediately after turning on.**

Repeat bias procedure at least 3 times the first 5 hours of using.

### **For the safety of your equipment**

- ! Make sure that all your equipment is turned off before any connection.
- ! To avoid damaging your speakers you have to turn on suara some seconds after turning on your preamplifier and turn it off some seconds before turning off your preamplifier.
- ! Never turn on suara without connected speakers or preamplifier on it. It is possible to damage tubes or even output transformers.

### **Specifications**

- Power: 230VAC 50Hz (115VAC 60Hz)
- Power consumption: 350 VA max
- Output power: 50 Watt per channel (KT 150)

- Frequency response: 20 Hz-25 KHz (-0.9dB)
- Input impedance: 100 Kohm
- Recommended speakers: 4-8 ohm
- Tube complement: 4x dual triodes, 4x KT120/KT150 Power Pentodes
- Input sensitivity: 1.8V triode mode / 1.5V Ultra Linear mode
- Inputs: 1x line unbalanced stereo (RCA and XLR connectors)
- Available Colors: Matt Black, Frozen Silver
- Dimensions (WxHxD): 43x19x29 cm
- Weight: 22Kg

## **Warranty**

- Lab12 products are designed and manufactured to the highest standards and deliver high- quality performance, ease of use and ease of installation. We are confident that you will enjoy many years of good service from your product.
- In the unlikely event of a failure of the product, we will arrange for your product to be serviced, free of charge, provided that the product was used in accordance with the instructions in the owner's manual.
- Lab12 could modify the design or specifications of any product without obligation to purchasers of previously manufactured products.
- This Warranty is provided for the benefit of the first and original purchaser of the covered product and is not transferable to a subsequent purchaser.
- Vacuum tubes are warranted for the original 90-day period only.
- This warranty does not affect your statutory rights. EU rules 1999/44/EK.
- This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.
- Lab12 reserves the right to change or modify any of the terms and conditions contained in this Warranty Statement, at any time and in our sole discretion. Any changes or modification will be effective immediately upon posting of the revisions on the Lab12 website, and you waive any right you may have to receive specific notice of such changes or modifications. In the event that there is a difference between this warranty and the provisions in any owner's manuals, warranty leaflets, or packaging cartons, the terms of this warranty, as published on the official Lab12 website, will prevail to the fullest extent allowed by law.

## **For the warranty to be valid:**

1. The Warranty card, which is placed outside the box of the unit, must be filled out by the authorized seller with the Model of the device, Serial Number, Color, Date of Purchase, Customer's Name and Customer's Address, as well as the authorized seller's point sign.
2. A copy of the purchase receipt must also be attached to this card.
3. A photo of the completed Warranty card, along with the purchase receipt, must be sent to [contact@lab12.gr](mailto:contact@lab12.gr) by the end consumer within one month from the date of purchase.

## **What is Covered and how long this coverage lasts?**

Only new products purchased through an authorized Lab12 dealer, importer or distributor are entitled for warranty coverage. The Warranty is limited to the first original purchaser and is inapplicable for secondhand products. This warranty covers defects in materials and workmanship in this product for 5 years (or a 90-Days Limited Warranty for vacuum tubes) after the date of purchase or no later than 6 years of the date of shipment to the authorized

Lab12 dealer or distributor, whichever comes first.

#### **What is Not Covered**

This limited warranty does not cover any damage, deterioration or malfunction resulting from any alteration, improper or unreasonable use or maintenance, misuse, abuse, accident, neglect, exposure to excess moisture, fire, improper packing, and shipping (such claims must be presented to the carrier), lightning, power surges, or other acts of nature.

This limited warranty does not cover any damage, deterioration or malfunction resulting from the installation or removal of this product from any installation, any unauthorized tampering with this product, any Tubes Swaps, Repairs or Modifications attempted by anyone unauthorized by Lab12, or any other cause which does not relate directly to a defect in materials and/or workmanship of this product.

This limited warranty does not cover vacuum tubes (after the 90-Day Limited Warranty), cartons, scratches on equipment enclosures, cables or accessories used in conjunction with this product.

#### **What we will do to correct problem**

During the Warranty Period, we will repair or replace, at no charge, products or parts of a product that proves defective due to defects in materials or workmanship, under normal use and maintenance.

#### **How To Obtain Service Under This Warranty:**

- You are responsible for transporting your product to (as well as from, in the event that Lab12 finds no defect covered by this warranty) either Lab12 or an authorized point and for payment of all shipping charges. Lab12 will pay the return shipping charges (in the event you return the product to Lab12) if the repairs are covered by warranty, provided that, Lab12 reserves the right to choose the mode, the carrier and the timing of such return shipping (if Lab12 finds that there are no defects covered by this warranty, then you shall be responsible for all shipping charges).
- Lab12 has authorized distribution in many countries of the world. In each country, the authorized importing retailer or distributor has accepted the responsibility for warranty of products sold by that retailer or distributor. Warranty service should normally be obtained from the importing retailer or distributor from whom you purchased your product. In the unlikely event that the technical service required is not possible to be fulfilled through the importer/distributor, this product must be returned to Lab12 main factory in Greece to fulfill the terms of this Limited Warranty at the purchaser's expense (except purchasers that purchase their product directly from our main facilities in Greece), along with the Warranty card and a copy of the proof of purchase for the product. As mentioned above, the Warranty card must list the date of purchase, the model, color and serial number of the product, the name and address of the purchaser and the authorized dealer/importer/retailer detailed sign. Additionally, you must provide detailed information on the symptoms or difficulties you have observed with the product's performance by completing a technical support form that will be provided to you by the authorized importing retailer, distributor or LAB12.
- To obtain warranty service, you can also contact directly Lab12 at [contact@lab12.gr](mailto:contact@lab12.gr) or +30-2102845173, to determine the most appropriate solution for you. All warranty claims must be made in writing accompanied by the Warranty card and a copy of the proof of purchase.
- Lab12 Single Member Private Company
- [Contact@lab12.gr](mailto:Contact@lab12.gr)
- [www.lab12.gr](http://www.lab12.gr)

We wish you to enjoy your new device exactly as we enjoyed it when we built it for you!

K. Varnali 57A, Metamorfosi, 14452, Athens, Greece

- Tel: +30 210 2845173



- Email: [contact@lab12.gr](mailto:contact@lab12.gr)
- Web: [www.lab12.gr](http://www.lab12.gr)

## FAQs


**Q: Can I use any power cable with Suara?**

A: It is recommended to use the Lab12 Knack mk2 Power Cable for optimal performance, although other high-grade power cables can also be used.

**Q: What should I do if one of the tubes needs replacement?**

A: Contact Lab12 or authorized dealers for tube replacement to ensure proper calibration and performance.

## Documents / Resources

	<p><a href="#">Lab12 suara Parallel tubes 2 x 50W Class A Power Amplifier</a> [pdf] Owner's Manual suara Parallel tubes 2 x 50W Class A Power Amplifier, suara, Parallel tubes 2 x 50W Class A Power Amplifier, tubes 2 x 50W Class A Power Amplifier, Class A Power Amplifier, Power Amplifier, Amplifier</p>
---	--

## References

- [🌐 Home - lab12](#)
- [🌐 Home - lab12](#)
- [User Manual](#)

### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.