

Laxihub LAXM4 M4 2MP Smart Indoor WiFi Camera User Guide

[Home](#) » [Laxihub](#) » Laxihub LAXM4 M4 2MP Smart Indoor WiFi Camera User Guide 

Contents

- [1 Laxihub LAXM4 M4 2MP Smart Indoor WiFi Camera](#)
- [2 Quick start guide](#)
- [3 Packing list](#)
- [4 Product description](#)
- [5 Camera configuration](#)
- [6 Specifications](#)
- [7 Symbols](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

Laxihub

Laxihub LAXM4 M4 2MP Smart Indoor WiFi Camera



Quick start guide

1. Packing list
2. product description
3. Device configuration
4. Legal notice

Packing list

- Camera 1X
- Screws 3X
- USB cable 1X



- Quick start guide 1X Power adaptor 1X



Notice

To reset the device, press and hold the reset button for 5 seconds. The camera beeps when the operation is complete.

Product description




Notice

To reset the device, press and hold the reset button for 5 seconds. The camera beeps when the operation is complete.

Flashing red light (slow)	Waiting configuration
Flashing red light (fast)	Searching WiFi network
Fixed blue light	Camera connected to WiFi
Flashing blue light	Access point mode

Camera configuration

1. Step 1 Turn on your camera by plugging in the power adapter.
2. Step 2 Connect your smartphone to the Wi-Fi network.
3. Step 3 Download Arenti app from the App Store or Google Play depending on your device.
4. Step 4 Launch Arenti app and sign up for the first use.
5. Step 5 Follow the steps below to add your camera, then follow the on-screen instructions.

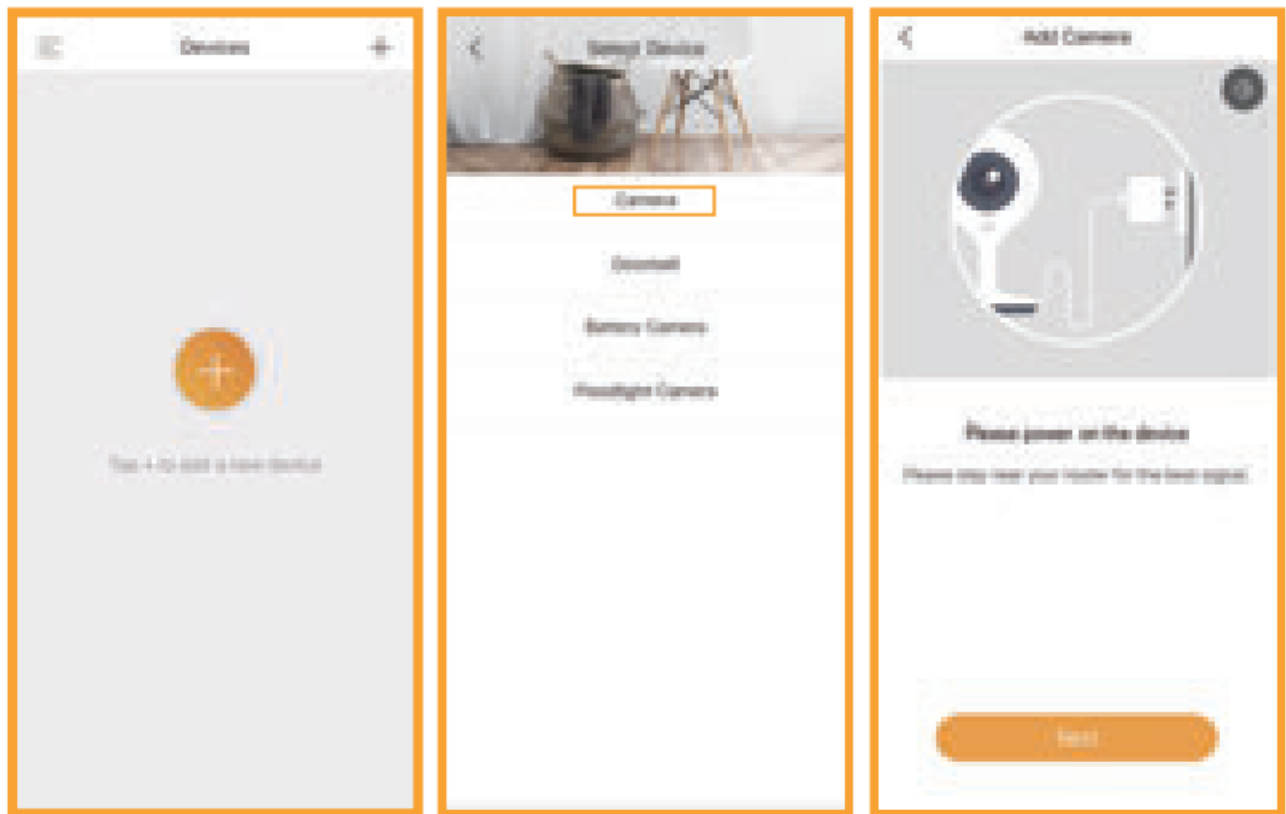

Note

- If you have multiple cameras, please follow step 5 again to add devices one by one.
 - To change Wi-Fi network, please restore the camera to factory settings and follow step 5 to add the camera.
- For more information, please download the user manual at www.laxihub.com

Specifications

Sensor type	1/3" CMOS
Min. Brightness	Color 0.1Lux@F2.0
	Black and white 0.01Lux@F2.0
Resolution	2MP(M4); 3MP(M4T)
Lens	3.6mm F2.0
Shutter	1/15-1/10,000 per second
Infrared	High power LED with ICR
Infrared distance	10 meters
Video compression	H.264
Bit rate	32Kbps~2Mbps
Max resolution	1920 x 1080(M4); 2304 x 1296(M4T)
Framerate	1~25 per second
Picture settings	Support HD/SD;support flip;
Storage	SD card(Max 128G)
Audio	Two-way audio
Protocols	HTTP,DHCP,DNS,RTSP
WiFi standard	IEEE802.11b/g/n
Frequency	2.4 GHz ~ 2.4835 GHz
Bandwidth	20/40MHz
WiFi encryption	WPA-PSK/WPA2-PSK
Security	AES128
Working temperature	-20 ℃ ~50 ℃
Power	DC5V,1A
Consumption	2.5W MAX
Size(mm)	60×58×110


Model	TPA-67F050100VU01
Input voltage	100-240Vac
input frequency	50-60Hz
Output voltage	+5Vdc
Output current	1A
Output power	5W
Efficiency	73,62%
No-load Consumption	< 0.1W

Support

www.laxihub.com

Symbols

Direct current (DC) Don't throw batteries or out of order products with the household waste (garbage). The dangerous substances that they are likely to include may harm health or the environment. Make your retailer take back these products or use the selective collect of garbage proposed by your city. Hereby, Arenti, declares that the radio equipment CE type "M4 is in compliance with the Directive 2014/53/EU. The full test of the EU declaration of conformity is available at the following Internet address: <http://www.laxihub.com> For indoor use only

	<p>Laxihub LAXM4 M4 2MP Smart Indoor WiFi Camera [pdf] User Guide</p> <p>LAXM4, M4 2MP Smart Indoor WiFi Camera, LAXM4 M4 2MP Smart Indoor WiFi Camera, 2M P Smart Indoor WiFi Camera, Smart Indoor WiFi Camera, Indoor WiFi Camera, WiFi Camera, Camera</p>
---	--