



LECTROTAB JLC-11 Joystick LED Trim Tab Control Instruction Manual

[Home](#) » [LECTROTAB](#) » LECTROTAB JLC-11 Joystick LED Trim Tab Control Instruction Manual 

Contents

- [1 LECTROTAB JLC-11 Joystick LED Trim Tab Control](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 FEATURES](#)
- [5 PRELIMINARY SPECIFICATIONS](#)
- [6 JLC-11 WIRING and DIMENSIONS](#)
- [7 JLC-11 Programming Chart](#)
- [8 Documents / Resources](#)
 - [8.1 References](#)



LECTROTAB JLC-11 Joystick LED Trim Tab Control



Product Information

The JLC-11 Joystick LED Trim Tab Control by Lectrotab is a user-friendly control designed to enhance the boating experience. It incorporates features requested by boat owners to provide precise control over trim tab movement.

Key Features:

- Single or dual station control
- 1 or 2 actuator per trim tab
- Black color
- Overall width: 3.0" (77mm)
- Overall height/thickness: 3.0" (77mm) / 2.0" (50mm)
- Mounting hole DC cutout diameter: 2.625" (66.7mm)
- Voltage: 12/24VDC
- Fuse size: 12VDC = 15 or 20 amps, 24VDC = 10 amps

For more information about the JLC-11 Joystick LED Trim Tab Control, please visit the [Lectrotab website](http://lectrotab.com) or contact them at Ph: 804-368-8428 or Email: sales@lectrotab.com.

Product Usage Instructions

To program the JLC-11 Joystick LED Trim Tab Control, follow these steps:

Lectrotab's Joystick LED control incorporates features requested by boat owners to provide a user-friendly control for a more enjoyable boating experience.

- Single "Joystick" control
- NMEA 2000 compatible
- LED display of each trim tab position

FEATURES

- Microprocessor based trim tab control with LED tab position indicators
- NMEA 2000 compatible with JLC-NMEA adapter
- Move both tabs up or down simultaneously with a single motion
- Dual station ready – just add a second JLC-11 and JR-* cable (sold separately)
- Automatic return to last tab position if ignition key is turned off and back on again
- Completely sealed, completely waterproof and will not deteriorate in sunlight• Automatic tab retraction and calibration with key or accessory switch off
- Easy upgrade from any of our Lectrotab controls
- No external power module required
- LED tab position indicators dim automatically in darkness and brighten in sunlight
- Single or Dual Actuator per tab
- Operates on 12 or 24 volt dc systems


PRELIMINARY SPECIFICATIONS

Model Number	Display Color	Number of Stations/Actuators	Overall Width	Overall Height/ Thickness	Mounting Hole Cutout (Diameter)	DC Voltage	Fuse Size Power Input (1 Actuator per Tab)	Fuse Size Aux.(MUST CONNECT)
JLC-11	Black	Single or Dual Station/ 1 or 2 Actuator/tab	3.0" / 77mm	3.0"(77mm) / 2.0"(50mm)	2.625" / 66.7mm	12/24	12vdc = 15 or 20 amps 24vdc = 10amps	1 to 2 amps

- Linear Devices Corporation
- 11126 Air Park Road, Suite G, Ashland, VA 23005
- www.lectrotab.com, Ph 804-368-8428, Email: sales@lectrotab.com
- August 2023

JLC-11 WIRING and DIMENSIONS

"JLC-11" Control Installation/ Wiring Diagram

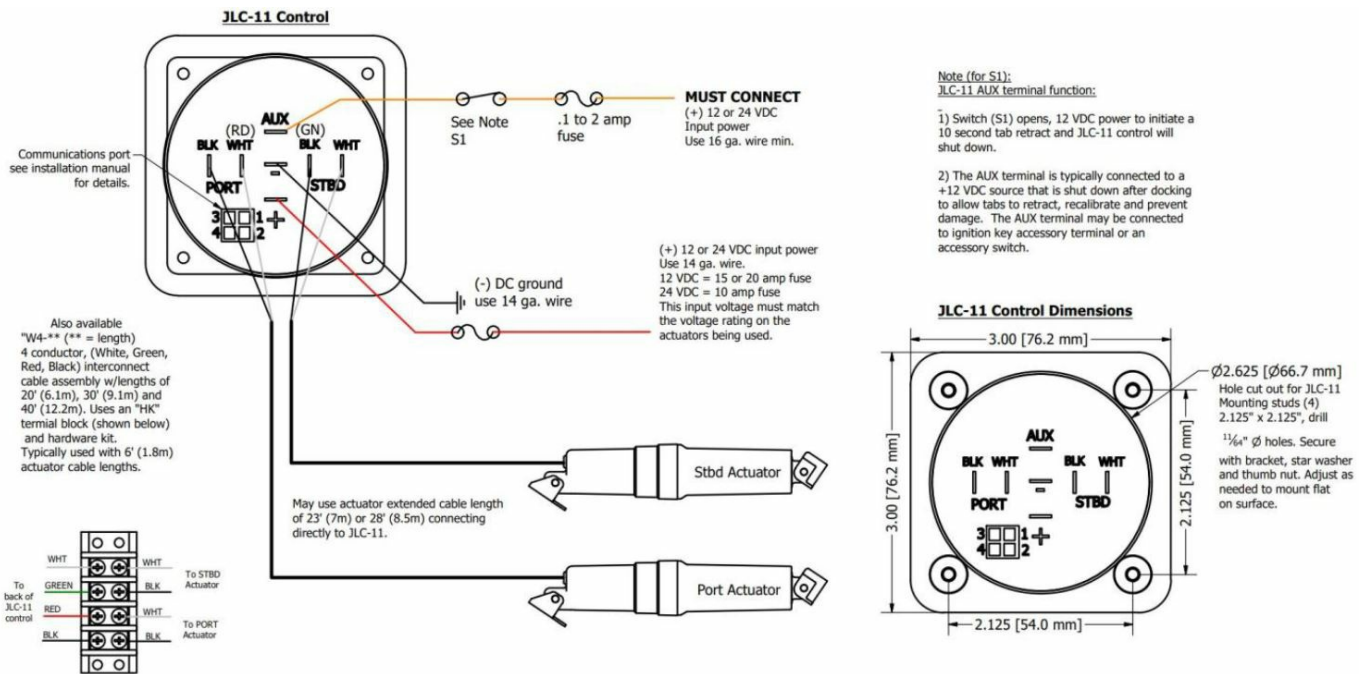

JLC-11 Programming Chart

JLC-11 Programming Chart						
Program Mode Sequence						
Function	Enter	Adjust Setting	Exit	Range	Default	Program Details
Timing	Push & hold joystick left	Move and hold Joystick Up or Down	Push joystick right and hold 4 seconds +	4 – 12sec	8sec	8 LEDs = 8 second actuator 4 LEDs = 4 second actuator
Remember Last Tab Position	Pull & hold joystick back	Move and hold Joystick Up or Down	Push joystick right and hold 4 seconds +	Standard/Remember	Standard	8 LEDs each side = Standard Retract 1 LED each side = Remember Last Tab Position
Swap LED's	Push & hold joystick right	Move and hold Joystick Up or Down	Push joystick right and hold 4 seconds +	LEDs match tab movement or opposite tab movement	LEDs match tab movement direction	1 LED on right and left = LEDs follow and match tab movement direction 8 LEDs on right and left = LED follow opposite of tab movement direction

Disable Auto Tab Retract	Push & hold joystick forward	Move and hold Joystick Up or Down	Push joystick right and hold 4 seconds +	Enable/Disable	Enabled	#1 LED each side = Default of Auto Tab Retract enabled #8 LED each side = Auto Retract Disabled
Independent Tab Control	Push & hold joystick 45° towards upper left position (between top and left position)	Move and hold Joystick Up or Down	Push joystick right and hold 4 seconds +	Enable/Disable	Disabled	#1 LED each side = Default Disabled or tabs do not operate independently #8 LED each side = Tabs operate independently

Programming Details

- **Timing:** #LEDs lit corresponds to the #seconds in actuator stroke time i.e. 8 LEDs = 8 seconds, 4 LEDs = 4 seconds (Actuator's A and B series = 8 seconds, C and D series = 4 seconds and S series = 6 seconds)
- **Remember Last Tab Position:** If AUX power is switched from +12 or 24vdc to 0vdc, tabs retract (Set Timing + 1 sec.). When power is reapplied, tabs go to last position before key sw. off. Removing +12 or 24vdc power source will reset original setting back to fully retracted and keep fully retracted at new power source on. (8 LEDs on each side = standard auto retract and no last setting, 1 top LED on each side = remember last tab position before Aux power off.)
- **Swap LED's:** 1 LED on right and left side = LEDs follow and match tab direction, 8 LEDs on right and left side = LEDs follow opposite of tab direction
- **Disable Auto Tab Retract:** *Note* this program mode does not require +12vdc to the AUX terminal. Press the All Up and All Down buttons at same time for 2sec Press the STBD Bow Down/Up to adjust between Enable and Disable. (#1 LED each side = Default of Auto Tab Retract enabled. #8 LED each side = Auto Retract Disabled) Press the Port Bow Up to exit program and save setting.
- **Independent Tab Control:** 1 LED on right and left side = Tabs do not operate independently, 8 LEDs on right and left side = Independent control of each tab

Linear Devices Corporation

- 11126 Air Park Road, Suite G, Ashland, VA 23005
- www.lectrotab.com, Ph 804-368-8428, Email: sales@lectrotab.com
- August 2023

Documents / Resources



[LECTROTAB JLC-11 Joystick LED Trim Tab Control](#) [pdf] Instruction Manual

JLC-11, JLC-11 Joystick LED Trim Tab Control, Joystick LED Trim Tab Control, LED Trim Tab Control, Trim Tab Control, Tab Control, Control

References

- [!\[\]\(065aacad479feea1b3f501fa02b79a7a_img.jpg\) Electromechanical Trim Tab Systems | Lectrotab](#)