

LEDYi
Lighting
**PR RGB2 3x10A
3v1RGB/CCT/Dim
ming 3 Channel
LED RFController**



LEDYi Lighting PR RGB2 3x10A 3v1 RGB/CCT/Dimming 3 Channel LED RF Controller Owner's Manual

[Home](#) » [LEDYi Lighting](#) » LEDYi Lighting PR RGB2 3x10A 3v1 RGB/CCT/Dimming 3 Channel LED RF Controller Owner's Manual 

Contents

- [1 LEDYi Lighting PR RGB2 3x10A 3v1 RGB/CCT/Dimming 3 Channel LED RF Controller](#)
- [2 Features](#)
- [3 Technical Parameters](#)
- [4 Mechanical Structures and Installations](#)
- [5 Wiring Diagram](#)
- [6 Match Remote Control \(two match ways\)](#)
- [7 RGB Dynamic mode list](#)
- [8 Dual color control](#)
- [9 Malfunctions analysis & troubleshooting](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)



LEDYi Lighting PR RGB2 3x10A 3v1 RGB/CCT/Dimming 3 Channel LED RF Controller



Model No: PR RGB2 3x10A 3v1

3 Channels/10A per channel/Step-less dimming/Wireless remote control/Auto-transmitting/Synchronize

Features

- Match with RF 2.4G single zone or multiple zone single color, dual color, and RGB/RGBW remote control.
- One RF controller accepts up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- When using RGB light, built-in 10 dynamic modes, include jump or gradual change style.
- Auto-transmitting function: The Controller automatically transmits a signal to another controller with a 15m control distance.
- Synchronize on multiple controllers.

Technical Parameters

Input and Output	
Input voltage	12-36VDC
Input current	30.5A
Output voltage	3 x (12-36)VDC
Output current	3CH,10A/CH
Output power	360-1080W(12-36V)
Output type	Constant voltage

Environment	
Operation temperature	Ta: -30 OC ~ +55 OC
Case temperature (Max.)	T c: +85OC
IP rating	IP20

Warranty and Protection	
Warranty	2 years
Protection	Reverse Polarity


Dimming data

Input signal	RF 2.4GHz
Control distance	15m(Barrier-free space)
Dimming gray scale	4096 (2^12) levels
Dimming range	0 -100%
Dimming curve	Logarithmic
PWM Frequency	750Hz (default)

Safety and EMC	
EMC standard (EMC)	EN301 489, EN 62479
Safety standard(LVD)	EN60950
Radio Equipment(RED)	EN300 328
Certification	CE,EMC, LVD,RED


Weight	
Net weight	0.240kg
Gross weight	0.259kg

Mechanical Structures and Installations

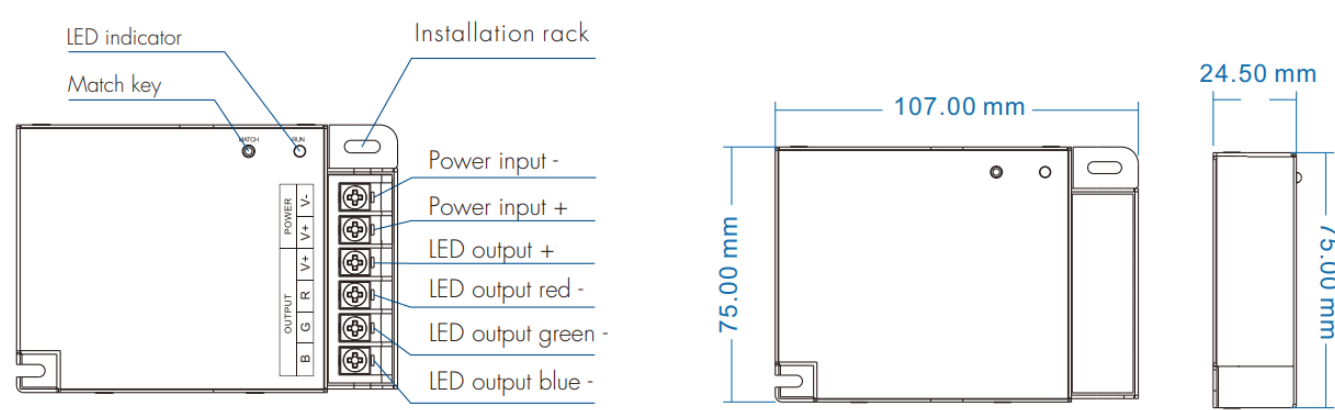


Wiring Diagram


• for RGB

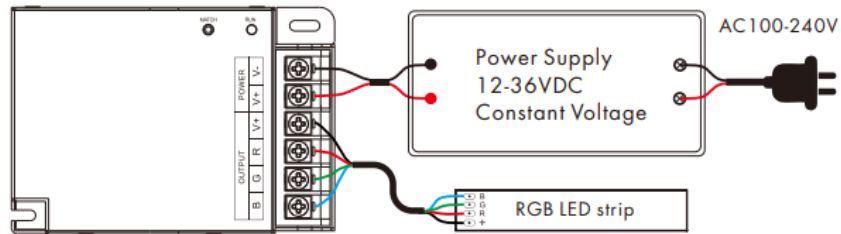

• for dual color

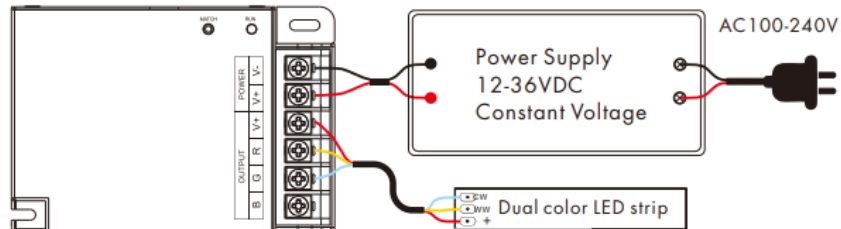

• for single color

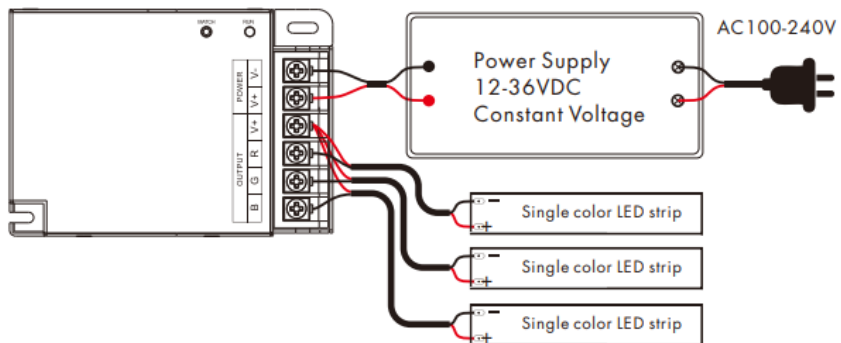

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller's Match key

Match:

Short press the match key, and immediately press the on/off key (single zone remote) or zone key (multiple zone remote) of the remote. The LED indicator fast flash a few times means match is successful.

Delete:

Press and hold the match key for 5s to delete all matches, The LED indicator fast flash a few times means all matched remotes were deleted.

Use Power Restart

Match:

Switch off the power, then switch on power again, and immediately short press the on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.


Delete:

Switch off the power, then switch on power again, and immediately short press the on/off key (single zone remote)

or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

RGB Dynamic mode list


1: RGB jump

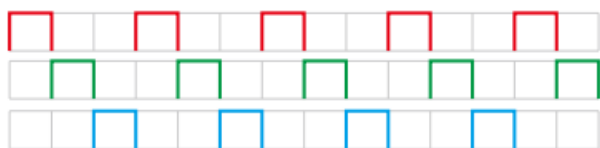

2: RGB smooth



3: 6 color jump

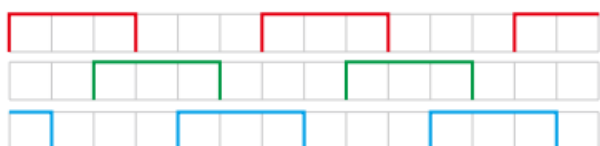

4: 6 color smooth



5: Yellow cyan purple smooth




6: RGB fade in and out




7: Red fade in and out




8: Green fade in and out

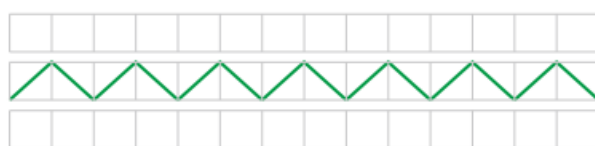

9: Blue fade in and out

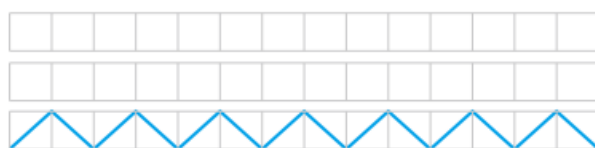

10: White fade in and out

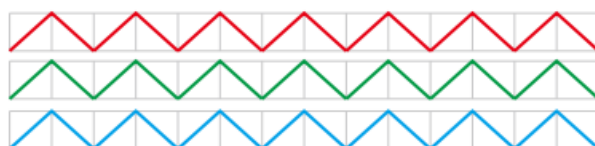


Dual color control

- CH1=Warm white LED
- CH2=Cool white LED


Each channel can supply up to 240W(@24V) and the white balance can be controlled as such:

Color temperature	Cool white	Neutral white	Warm white
Power distribution	CH1=0W,CH2=240W	CH1=120W,CH2=120W	CH1=240W,CH2=0W


Linear dual color tuning

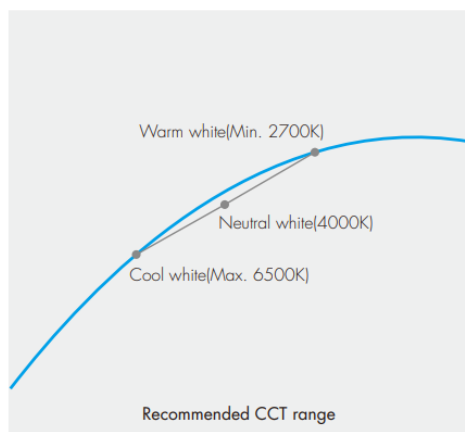

Dimming curve for CCT

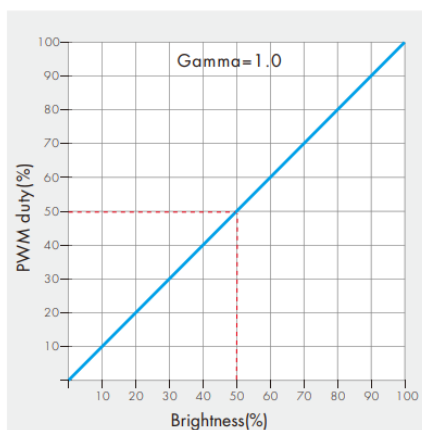


Dimming curve for RGB/DIM

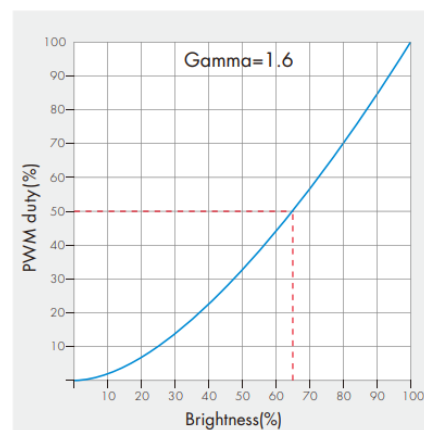

Malfunctions analysis & troubleshooting

Malfunctions	Causes	Troubleshooting
No light	<ol style="list-style-type: none"> 1. No power. 2. Wrong connection or insecure. 	<ol style="list-style-type: none"> 1. Check the power. 2. Check the connection.
Wrong color	<ol style="list-style-type: none"> 1. Wrong connection of R/G/B wires. 	<ol style="list-style-type: none"> 1. Reconnect R/G/B wires.
Uneven intensity between front and rear, with voltage drop	<ol style="list-style-type: none"> 1. Output cable is too long. 2. Wire diameter is too small. 3. Overload beyond power supply capability. 4. Overload beyond controller capability. 	<ol style="list-style-type: none"> 1. Reduce cable or loop supply. 2. Change wider wire. 3. Replace higher power supply. 4. Add power repeater.
No response from the remote	<ol style="list-style-type: none"> 1. The battery has no power. 2. Beyond controllable distance. 3. The controller did not match the remote. 	<ol style="list-style-type: none"> 1. Replace battery. 2. Reduce remote distance. 3. Re-match the remote.

Documents / Resources

	LEDYi Lighting PR RGB2 3x10A 3v1 RGB/CCT/Dimming 3 Channel LED RF Controller [pdf]] Owner's Manual PR RGB2 3x10A 3v1 RGB CCT Dimming 3 Channel LED RF Controller, PR RGB2 3x10A 3v1, RGB CCT Dimming 3 Channel LED RF Controller, CCT Dimming 3 Channel LED RF Controller, Dimming 3 Channel LED RF Controller, 3 Channel LED RF Controller, LED RF Controller, RF Controller, Controller
---	--

References

- [User Manual](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.