



Lemokey G2 Wireless  
Mouse



# Lemokey G2 Wireless Mouse User Manual

[Home](#) » [Lemokey](#) » Lemokey G2 Wireless Mouse User Manual 

## Contents

- [1 Lemokey G2 Wireless Mouse](#)
- [2 User manual](#)
- [3 Modes of connection](#)
- [4 Status indicator](#)
- [5 DPI indicator](#)
- [6 Report Rate](#)
- [7 Driver Software](#)
- [8 Auto-Sleep mode](#)
- [9 Charging indicator explanation](#)
- [10 What's in the box](#)
- [11 Mouse specification](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)
- [13 Related Posts](#)




**Lemokey G2 Wireless Mouse**




## User manual

1. Right button
2. Forward button
3. Receiver compartment
4. DPI button
5. Left button
6. Mouse indicator
7. Charging port
8. Middle wheel button
9. 2.4GHz Type – receiver
10. Backward button
11. Modes toggle
12. Wired Mode:

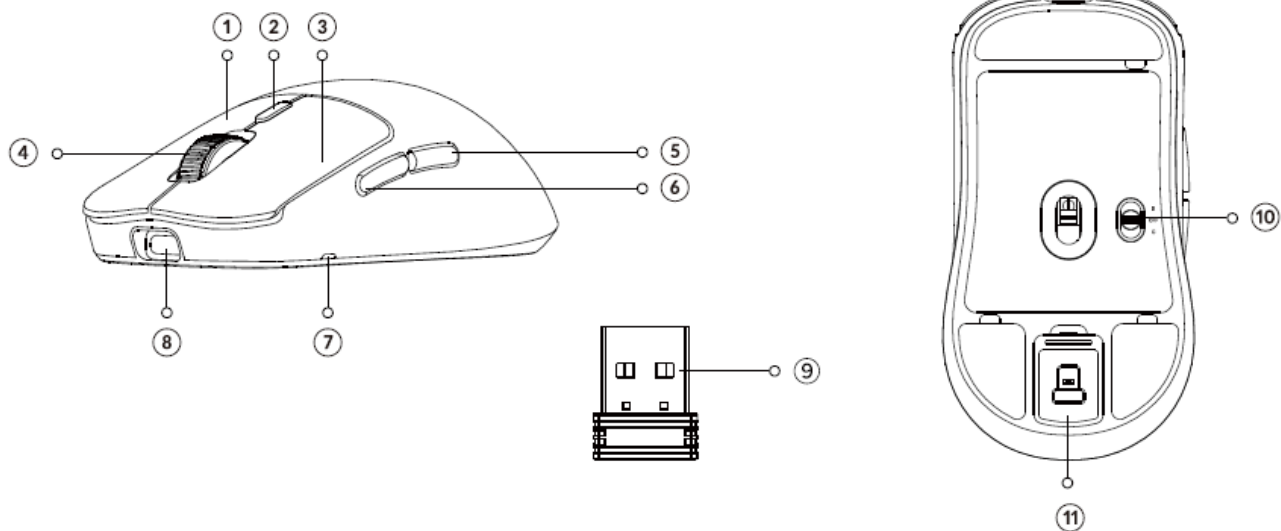


## Modes of connection

1. When the mode switch is in “OFF” position, the mouse won’t respond if the cable is not connected.
  2. Connect the cable to the TYPE-C port of the mouse and the USB port on the device. The mouse is ready to use while the indicator lights up.
- \* When connected by cable, the mode will default to wired mode even if the toggle is in Bluetooth mode or 2.4GHz mode.

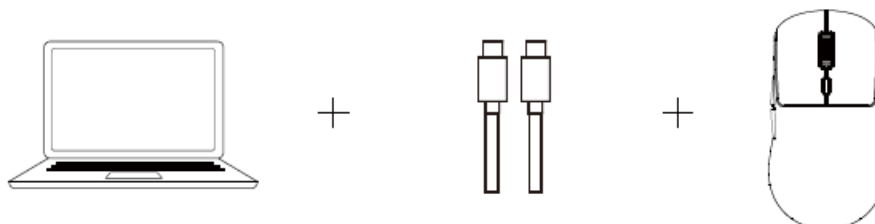


## 4GHz Mode


1. Switch to “G” mode (2.4GHz mode), and the mouse will automatically turn on 2.4GHz pairing. The mouse indicator will slowly flash green.
2. Find the 2.4GHz receiver and connect it to the device’s USB. Once successfully connected, the mouse indicator will turn green and stay on for 3 seconds before dimming off. The mouse is now ready for use.
3. In 2.4GHz pairing mode, the mouse indicator will slowly blink green for 3 minutes. If the mouse is not connected within 3 minutes, the indicator will turn off. If you need to reconnect, hold both the “Left button+ Middle Wheel+ Right button” for 4 seconds to re-enter pairing mode.
  - If you need to repair the connection in 2.4GHz mode, please unplug the 2.4GHz receiver first. Then, hold both the “Left button Middle Wheel+ Right button” for 4 seconds, wait for the green light indicator to start flashing, and plug the 2.4GHz receiver back in to complete the pairing process.
  - Note: It is recommended that when pairing the G2 in 2.4GHz mode, the mouse should be within 20cm of the receiver.

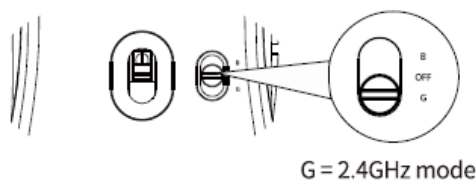

simultaneously hold for 4 seconds  
(to enter the forced pairing mode)





Note: For the best wireless experience, we recommend using the cable and putting the 2.4GHz receiver somewhere on your desk close to your mouse for a lower rate of latency and fewer signal interferences.

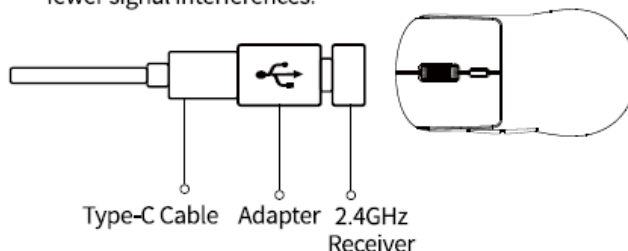


## Bluetooth mode

1. Switch to "B" Mode (Bluetooth), and the mouse will automatically turn on Bluetooth pairing mode. The mouse indicator will slowly flash blue.
2. Open the Bluetooth settings, search for a device named "Lemokey G2", then click "connect" to complete pairing.
3. When in Bluetooth pairing mode, the mouse indicator will slowly blink in blue for 3 minutes. If it's not connected within 3 minutes, the mouse indicator will turn off. If you need to reconnect, you need to hold the "Left button+Middle Wheel+Right button" for 4 seconds to re-enter pairing mode. The indicator will slowly blink blue.
4. If the G2 is in Bluetooth mode and needs to pair with a new device, hold both the "Left button+Middle Wheel+Right button" for 4 seconds and wait for the blue light to flash on. At this point, Bluetooth has re-entered pairing mode, and you can connect the new device to the G2.

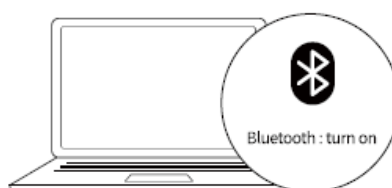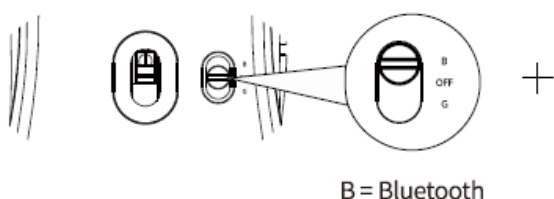


"Lemokey G2"  
disconnected  
**connected**



simultaneously hold for 4 seconds  
(to re-enter pairing mode)


## Status indicator

2.4GHz Mode	*The mouse indicator slowly blinks green - Ready to be paired. *The mouse indicator quickly blinks green - Pairing with the previous device.
Bluetooth Mode	*The mouse indicator slowly blinks blue - Ready to be paired. *The mouse indicator quickly blinks blue - Pairing with the previous device.
Low Power	The mouse indicator will slowly blink red.

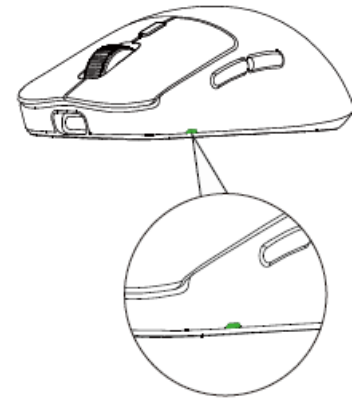

## DPI indicator

White light	400 DPI	Yellow light	3200 DPI
Green light	800 DPI	Red light	5000 DPI
Blue light	1600 DPI (default)		

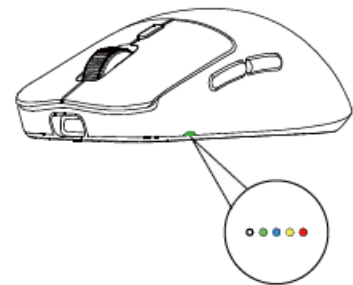

## Report Rate

Report rate	Report rate / Hz	Available modes
White	125	2.4G / BT / Wired
Green	500	2.4G / Wired
Blue	1000	2.4G / Wired(default)
Yellow	2000	2.4G / Wired
Red	4000	2.4G / Wired
Purple	8000	2.4G / Wired



\*Please adjust the report rate in the driver software.

## Driver Software

The Lemokey G2 mouse driver can be selected on [launcher.lemokey.com](https://launcher.lemokey.com). If the driver software can't connect to the mouse, please contact us for technical support.

## Auto-Sleep mode

Auto-Sleep mode will not be activated when in wired mode. When in Bluetooth mode or 2.4GHz mode, the mouse will go to Auto-Sleep mode after 10 minutes of sitting idle to save the battery. Move or click the mouse to wake it up.

## How to factory reset

Hold down both the “DPI” button and “Middle Wheel” button for 4 seconds, and all the LED lights on the mouse will blink. It will blink three times to indicate that the factory reset is successful.



simultaneously hold for 4 seconds (starts factory reset)

## Charging indicator explanation

•

Fully Charged	The mouse indicator will stay GREEN.
Low Power	The mouse indicator will slowly blink RED.

The mouse is compatible with all USB ports. For the best signal and charging speed, connecting to the USB3.0 port is recommended when charging or in use.

- If the mouse is connected by the USB Type – C cable when charging but not paired with any devices:
- The mouse indicator will stay RED when charging.
- The mouse indicator will stay GREEN when fully charged.

Note: The product supports up to 5V charging voltage and 150 mA charging current. We are not responsible for any problems caused by improper recharging.

## What's in the box

- Mouse x 1
- Type -C cable x 1
- Extension adapter x 1
- Type -A receiver x 1
- User manual x 1
- Type-A to Type -C adapter x 1

## Mouse specification

- Size: 118\*62.6\*38.2mm


- Weight: 52 ± 3g
- Report Rate(polling rate): 125(White) 500(Green) 1000(Blue) -2000(Yellow) -4000(Red) -8000(Purple)
- Sensor: PixArt 3950
- Resolution: 100-30000DPI
- Battery capacity: 300mAh
- Usage duration: 60 Hours (Under 1000Hz) 35 Hours (1000-4000Hz) 20 Hours (4000-8000Hz)
- Recharge time: 2.5 Hours
- Charging port: Type -C
- Mouse micro switches: Huano Micro Switch (80 million clicks life time) 2.4GHz/ Bluetooth connection range:  
Approx 10m of open space
- Connection mode: 2.4GHz -Bluetooth -Wired
- Device name: Lemokey G2

Find us at: <https://www.lemokey.com>  
[Support@lemokey.com](mailto:Support@lemokey.com) If @lemokey

© @emokey.keyboard X

@ Lmokey\_com Designed by Lemokey Made in China

## Documents / Resources

	<a href="#">Lemokey G2 Wireless Mouse</a> [pdf] User Manual G2 Wireless Mouse, G2, Wireless Mouse, Mouse
---	---

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.