
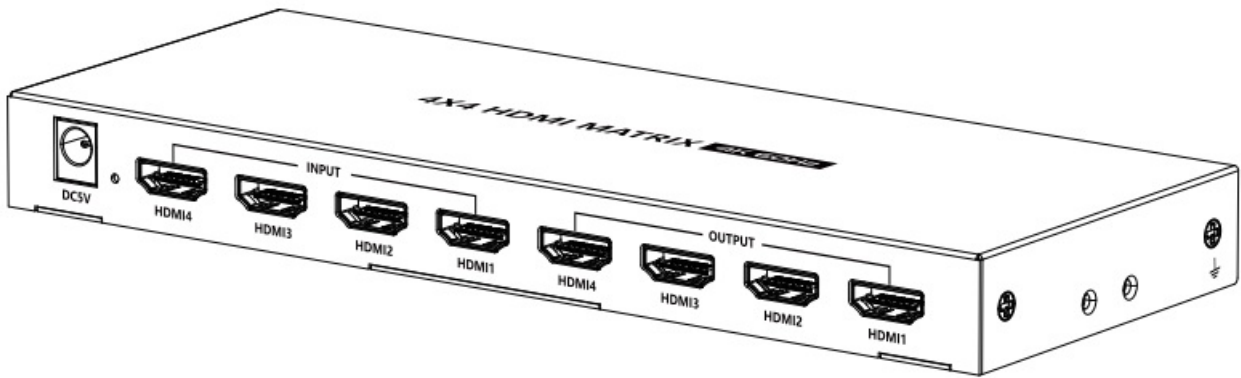




# Lenkeng LKV424 Matrix Switcher User Manual

[Home](#) » [LENKENG](#) » Lenkeng LKV424 Matrix Switcher User Manual 

Lenkeng LKV424 Matrix Switcher



## Contents

- [1 Important Safety Instructions](#)
- [2 Introduction](#)
- [3 Features](#)
- [4 Package Contents](#)
- [5 Installation Requirements](#)
- [6 Panel Description](#)
- [7 Remote Control](#)
- [8 Installation Procedures](#)
  - [8.1 Connection Diagrams](#)
  - [8.2 Connection Instructions](#)
  - [8.3 RS-232 control](#)
  - [8.4 EDID settings](#)
- [9 FAQ](#)
- [10 Specification](#)
- [11 Disclaimer](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)

## Important Safety Instructions

1. To prevent electric shock, please ensure that all apparatus is properly grounded.
2. Do not place this apparatus near or over a radiator or heat register, or where it is exposed to direct sunlight.
3. Place the device in a well-ventilated area, do not block any ventilation openings.
4. Do not expose this apparatus to rain or place it near water. Any liquid that goes into the apparatus may cause a failure, fire, or electric shock.
5. Do not place the device on an uneven or unstable surface. The device may fall resulting in a malfunction.
6. Never insert anything metallic into the open parts of this apparatus. This may cause a danger of electric shock.
7. If a three-party power supply is used, please ensure that the power supply specifications meet the product requirements.

## Introduction


This is a 4 in 4 out HDMI matrix switch, it can switch 4 HDMI input signals to 4 HDMI displays as needed. It supports up to 4096×2160@60Hz HDR UHD resolution, and a variety of switching methods (IR remote control, buttons and RS232) flexibly match input and output devices; Any two of the four HDMI outputs support Auto Down-scaling. This unit is a reliable, ultra-high-definition video transmission solution, which is widely used in security monitoring, education and training, exhibition and broadcasting, command center and other scenarios.

## Features


1. Support 4 HDMI input signals and 4 HDMI output signals.
2. Support up to 4096×2160@60Hz resolution and is backward compatible.
3. Support HDR10.
4. Support multiple switching mode: IR remote control, buttons, RS232.
5. Support setting the EDID of the product.
6. Any two of the four HDMI outputs support Auto Down-scaling.
7. Lightning protection, surge protection, ESD protection.

## Package Contents

- Matrix Switch x1

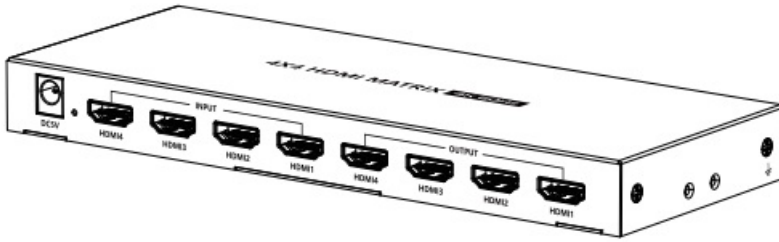


- Power Adapter 5V/1A x1

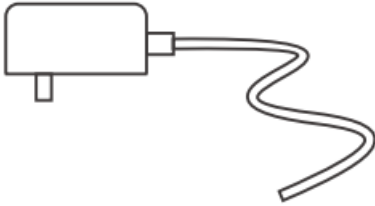


- User Manual x1



- Remote Control x1

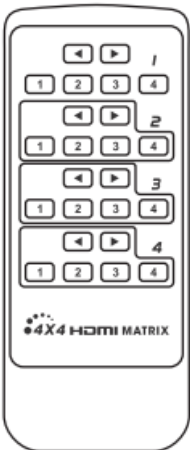

- Mounting Ear x2



- Screw x6



- Grounding Screw x2




- Terminal block x1



## Installation Requirements

1. Source device: signal source with HDMI output interface, such as PS4, TV box, PC, etc.
2. Display device: 4K or 1080P display device with HDMI input interface, such as TV, projector.

## Panel Description

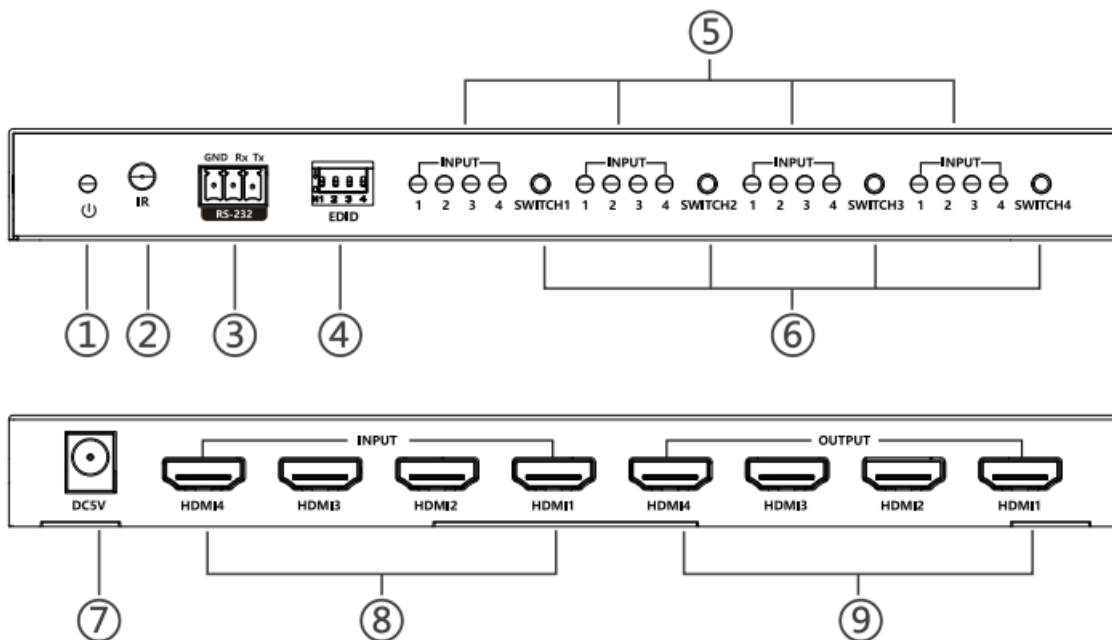

1	Power indicator	When there is power, the indicator will light solid yellow
2	IR receiving window	Receive IR signal
3	RS-232	Used for RS-232 command control
4	EDID DIP	Switch output display resolution
5	HDMI input indicator 1,2,3,4	Corresponding to HDMI input 1,2,3,4 respectively
6	HDMI output Switch 1,2,3,4	Control the switch of HDMI output 1,2,3,4 respectively
7	DC5V	Connect with DC5V/1A power adapter
8	HDMI input 1,2,3,4	Connect with HDMI source device
9	HDMI output 1,2,3,4	Connect with HDMI display device


## Remote Control

This remote control is just used for inputs or outputs switched.



## Installation Procedures

### Connection Diagrams

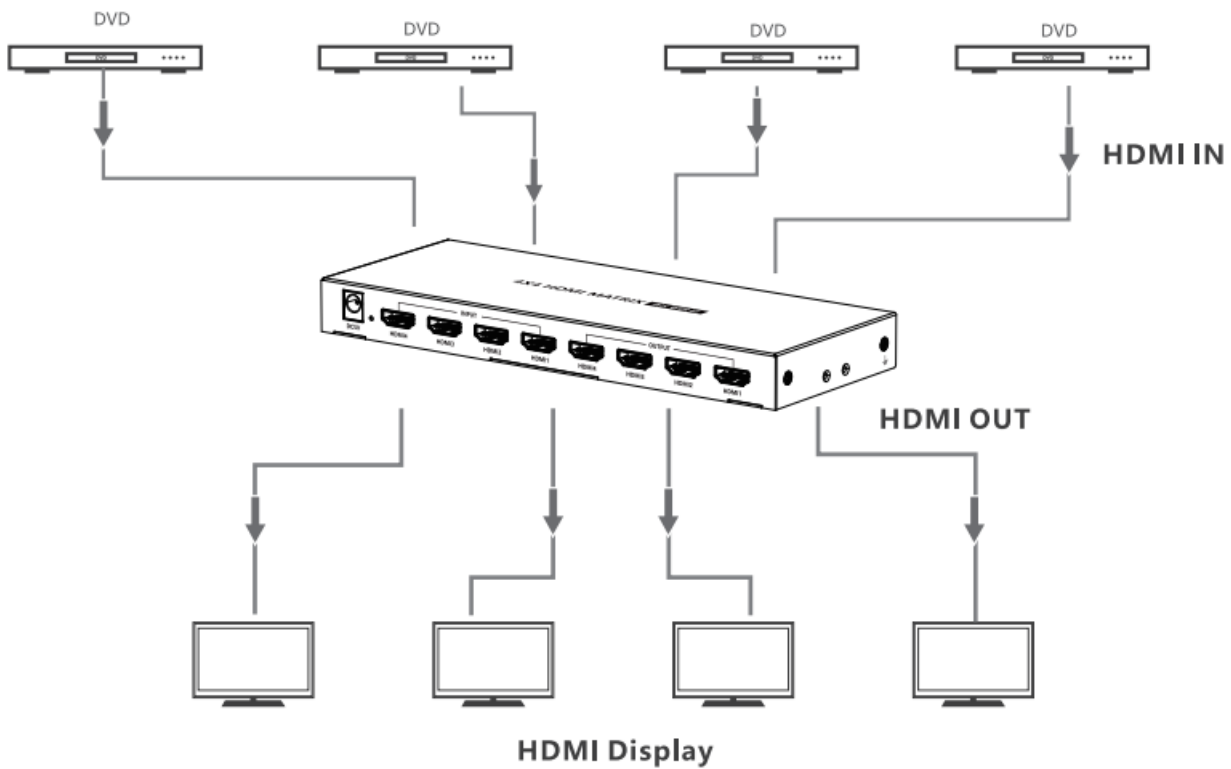

### Connection Instructions

1. Connect the source devices to the HDMI input ports with HDMI cables.
2. Connect the display devices to the HDMI output ports with HDMI cables.
3. Power on the devices to get started.

### RS-232 control

**Baud rate:** 9600

**Data bits:** 8

**stop character:** 1

Parity: none

Operation mode one	/	HDMI1 input	HDMI2 input	HDMI3 input	HDMI4 input
	HDMI1 output	PS11R	PS12R	PS13R	PS14R
	HDMI2 output	PS21R	PS22R	PS23R	PS24R
	HDMI3 output	PS31R	PS32R	PS33R	PS34R
	HDMI4 output	PS41R	PS42R	PS43R	PS44R
	HDMI1/2/ 3/4 output	PA1R	PA2R	PA3R	PA4R
Operation mode two	<div><div>PAPXPXPXPX</div><div><div>Prefix</div><div>1</div><div>2</div><div>3</div><div>4</div></div><div><div>Content for output port HDMI 4</div><div>Content for output port HDMI 3</div><div>Content for output port HDMI 2</div><div>Content for output port HDMI 1</div></div></div> <p>PAPXPXPXPX</p> <p>PA is the command prefix, and the “X” of PX can be any number from 1 to 4. PI represents HDMI 1 source content for output, PZ represents HDMI 2 source content for output, and so on to P4.</p> <p>E.g . PAP3P1 P4P2 represents :</p> <p>Output port HDMI 1 outputs content from input port HDMI 3 Output port HDMI 2 outputs content from input port HDMI 1 Output port HDMI 3 outputs content from input port HDMI 4 Output port HDMI 4 outputs content from input port HDMI 2</p>				
Return value	PAXXXR is the command to read the status of all interfaces; after sending the command, OKPXPXPXPX is displayed, where X is 1 to 4; if the command sent is incorrect, ERR appears.				
Reset	Device restart				
Recover	Restore device factory setting				
BaudXX	Set baud rate value: 9600 (default), 19200				

EDID settings

The product has 16 built-in EDID states, which can be set to switch the output resolution through the DIP switch. The DIP switch up means “1” and down means “O”.

DIP switch status				Resolution information
	2	3	4	

0	0	0	0	4K@60Hz 2CH
	0	0	0	4K@60Hz 5.1CH
0		0	0	4K@60Hz 7.1CH
0	0		0	4K@60Hz HDR 7.1CH
0	0	0		4K@30Hz 2CH
		0	0	4K@30Hz 5.1CH
	0		0	4K@30Hz 7.1CH
	0	0		4K@30Hz HDR 7.1CH
0			0	1080p@60Hz 2CH
0		0		1080p@60Hz 5.1CH
0	0			1080p@60Hz 7.1CH
			0	1080i@60Hz 2CH
		0		1080i@60Hz 5.1CH
	0			1080i@60Hz 7.1CH
0				1080p@60Hz HDR 7.1CH
				1. Read only the EDID that was first connected to the output 2. Connect 4 outputs at the same time, only read the EDID of HDMI 1 output

## FAQ



**Q: No video or audio signal output on the displays?**

**A:**

1. Please check and make sure the matrix switch is connected well and powered.
2. Please check and make sure all HDMI cables are connected}.
3. Please check and make sure the input channel of displays are.

**Q: Picture quality is not fluent and stable?**

**A:**

1. Please check and make sure all HDMI cables are connected
2. Try to connect the source device to display device directly, or change to another source device for a try to see the picture quality.
3. Please use high quality HDMI standard cable when HDMI 4K signal

**Specification**

Items	Description
HDMI version	HDMI2.0 (HDR, YUV4:4:4)
	Compatible with HDCP2.2,HDCP1 .4
HDMI interface	4 HDMI input, 4 HDMI output
Transmission rate	18Gbps
Bandwidth	600MHz
Resolution	480i@60Hz, 480p@60Hz, 576i@50Hz, 576p@50Hz, 720p@50/60Hz, 1080i@50/60Hz, 1080p@50/60Hz, 3840×2160@24/25/30/60Hz, 4096×2160@24/25/30/60Hz
Audio format	LPCM7.1/DTS-HD/DTS-Audio/Dolby Digital plus/ Dolby TrueHD 7.1/Dolby Digital 7.1CH/Dolby Atmos
RS-232	3 Pin(GND/Rx/Tx), Baud rate 9600
Voltage	DC5V/1A
Power consumption	<4W
Working temperature	-20°C~60°C
Storage temperature	-30°C~70°C
Humidity	0~90%RH(No Condensation)
Housing	Iron
Color	Black
Weight	375g
Dimensions	210.0(L)*80.0(W)*21.0(H) mm
Protection	ESD protection 1a Contact discharge level 2 (±4KV) 1b Air discharge level 3 (±8KV)Implementation of the standard: IEC61000-4-2
	Lightning protection, Surge protection

## Disclaimer

The product name and brand name may be registered trademark of related manufactures. "™" and "®" may be omitted on the user manual. The pictures in this user manual are just for reference. The terms HDMI, HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. We reserve the rights to make changes without further notice to a product or system described herein to improve reliability, function or design.



**Documents / Resources**

	<a href="#">Lenkeng LKV424 Matrix Switcher</a> [pdf] User Manual LKV424 Matrix Switcher, LKV424, Matrix Switcher, Switcher
---	---