



LEVITON ODSMT-MDx Smart Multi Tech Wallbox Sensor Owner's Manual

[Home](#) » [Leviton](#) » **LEVITON ODSMT-MDx Smart Multi Tech Wallbox Sensor Owner's Manual** 

Contents

- [1 LEVITON ODSMT-MDx Smart Multi Tech Wallbox Sensor](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Product Data](#)
 - [4.1 Description](#)
 - [4.2 Applications](#)
 - [4.3 Features](#)
 - [4.4 Wiring Diagram—ODSMT-MDx](#)
 - [4.5 Dimensions Diagrams](#)
 - [4.6 Specifications](#)
 - [4.7 Ordering Information](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)
- [6 Related Posts](#)



LEVITON ODSMT-MDx Smart Multi Tech Wallbox Sensor



Product Information

Specifications

- **Electrical Input Voltage/Frequency:** 120-277VAC
- **Input Current:** 120VAC
- **Load Ratings:**
 - General Purpose @ 120V: 20A
 - General Purpose @ 277V*: 10A
 - LED/Electronic Ballast @ 120V: 6.67A
 - LED/Electronic Ballast @ 277V*: 1/4HP (FLA 5.8A)
 - Standard Ballast @ 120V: 1/3HP (FLA 3.0A)
 - Standard Ballast @ 277V: IP20
 - Tungsten @ 120V: BLE 4.2, BLE 5.0
 - Tungsten @ 277V: 4.13 x 2.12 x 1.86 (104.90mm x 53.95mm x 47.25mm)
 - Motor @ 120V: Can be used to comply with ASHRAE 90.1, IECC and 2022 Title 24, Part 6 occupancy/vacancy sensing, and manual-ON/auto-OFF requirements
 - Motor @ 277V: IECC, UL and cUL listed; JIS Z 2801:2000 FCC, ICC
- **IP Rating:** Limited five-year warranty

Product Usage Instructions

Installation

To install the ODSMT-MDx Smart Multi-Tech Wallbox Sensor, follow these steps:

1. Ensure power is turned off at the circuit breaker.
2. Remove the front face cover of the wallbox sensor.
3. Connect the line and neutral wires to the corresponding terminals.

4. Connect the black wire to the load terminal.
5. Connect the blue wire to the blue terminal.
6. Connect the green wire to the ground terminal.
7. Replace the front face cover.

Configuration

To configure the ODSMT-MDx Smart Multi-Tech Wallbox Sensor, follow these steps:

1. Press and hold the pushbutton on the sensor.
2. While holding the pushbutton, perform the desired configuration using the chart provided in the user manual.
3. Release the pushbutton to save the configuration.

Usage Modes

The ODSMT-MDx Smart Multi-Tech Wallbox Sensor has different usage modes that can be configured using the pushbutton:

- Auto-ON/Auto-OFF: The sensor automatically turns ON and OFF based on motion detection.
- Manual-ON/Auto-OFF: The sensor turns ON manually but turns OFF automatically based on motion detection.

Sensitivity Adjustment

The ODSMT-MDx Smart Multi-Tech Wallbox Sensor allows you to adjust the sensitivity. This can be done using the pushbutton and the sensitivity chart provided in the user manual.

FAQ

- **Q: Can the ODSMT-MDx Smart Multi-Tech Wallbox Sensor be used without a smart device?**

A: Yes, the sensor can be used without a smart device. You can program it by pressing the button according to the installation instructions provided.

- **Q: What is the difference between the minor motion zone and the major motion zone?**

A: The minor motion zone detects small body movements and allows the lights to remain ON when individuals in the space are more stationary. The major motion zone requires larger movements for detection.


- **Q: What is the IP Rating of the ODSMT-MDx Smart Multi-Tech Wallbox Sensor?**

A: The sensor has an IP20 rating.

Product Data

ODSMT-MDx

Smart Multi-Tech Wallbox Sensor

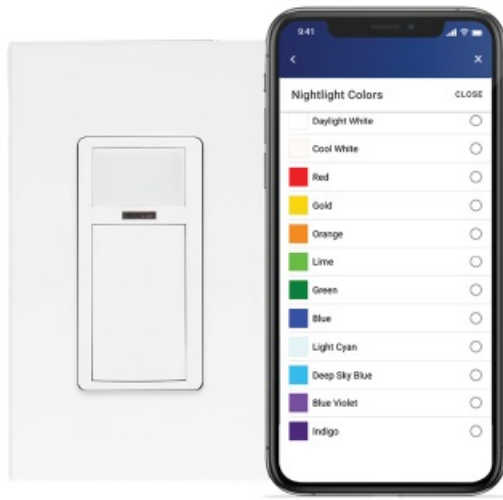

Description

- The Leviton Smart 0-10V Wallbox Sensor (ODSMT-MDx) uses Passive Infrared (PIR) detection and Microphonics technology to monitor a room for occupancy. The PIR sensor uses a specialized segmented and tamper resistant lens that divides the field-of-view into sensor zones. When a person passes in or out of a sensor zone, the sensor detects motion and switches the lights ON. The lights will remain ON as long as an occupant moves through the sensor zones and will turn off when space becomes vacant and after the timeout expires. ODSMT also utilizes Microphonic technology that “listens” for human activity in the space and will keep the lights ON when motion is detected. Microphonics does not require a direct line of sight and can pick up human activity behind obstructions that PIR-only devices are unable to detect. The ODSMT features a vacancy mode for manual-ON/auto-OFF operation, ideal for installations where manual-ON switching is required for energy code applications.
- A “minor motion” zone detects small body movements. This detection allows the lights to remain ON when individuals in the space are more stationary. The “major motion” zone exhibits a lesser degree of sensitivity requiring larger movements.
- Configuration of the ODSMT is made using the Leviton Smart Sensor App from a smartphone or other Bluetooth®-enabled Android or iOS device. Simple configuration can also be applied using pushbutton setup for several popular pre-configured options. The ODSMT integrates a photocell for daylighting hold-OFF which can be programmed using the Leviton Smart Sensor App.


Applications

- Office
- Small Lobbies
- Meeting Rooms
- Bathrooms/Restrooms
- Conference Rooms

Features

- Can be used to comply with ASHRAE 90.1, IECC and 2022 Title 24, Part 6 occupancy/vacancy sensing, switching, and manual-ON/auto-OFF requirements

- Fits in a standard wallbox and changeable with other units
- Controls General Purpose plug loads up to 20A and LED lighting loads up to 10A
- One relay module for single-level switching
- 80° field-of-view provides approximately 1,100 square feet of coverage
- Latest PIR technology accurately detects minor motion up to 400sq ft and major motion up to 1,100 sq ft
- Maximum sensing distance in front of the sensor is 30-40 feet and 15-20 feet on either side
- Microphonics technology able to detect minor human activity and does not require direct line-of-sight
- Integrated photocell for daylighting hold-OFF
- Tamper-resistant PIR lens
- Use the Leviton Push to Pair (P2P) process to create a multi-way system for up to 5 devices
- Antimicrobial-treated faceplate and wallplate available
- Advanced configuration can be performed using the Leviton Smart Sensor App on any Bluetooth-enabled Android or iOS device:
 - Set the operating mode for Occupancy (Auto-ON/Auto-OFF) or Vacancy (manual-ON/auto-OFF)
 - Adjust sensitivity and timeouts
 - Enable the integrated photocell for daylighting hold-OFF and select target daylighting hold-OFF levels
 - Create custom templates for easy multi-room replication of sensor settings
 - Activate the nightlight and select nightlight color
 - Set a security code to lock configuration settings
- Out-of-the-box configuration default mode:
 - Auto-ON/Auto-OFF with 20-minute timeout
 - Sensitivity set to 75%
 - Nightlight and daylighting disabled

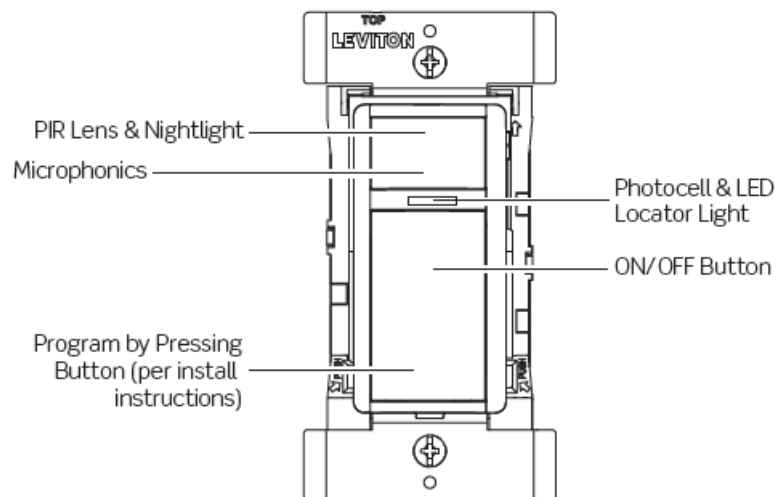


Convenient pushbutton hold configuration for installers without a smart device*:

Pushbutton Hold Configuration				
Button (#)	Operating Mode	PIR Sensitivity (%)	Microphonics Sensitivity (%)	Time Out (mins)
1	Auto-ON/ Auto-OFF	75	75	20
2				10
3			OFF	20
4		100	50	
5			75	
6			100	
7	Manual-ON/ Auto-OFF	75	75	10
8				20
9			OFF	
10		100	50	
11			75	
12			100	

*Requires removal of front face cover


Wiring Diagram—ODSMT-MDx

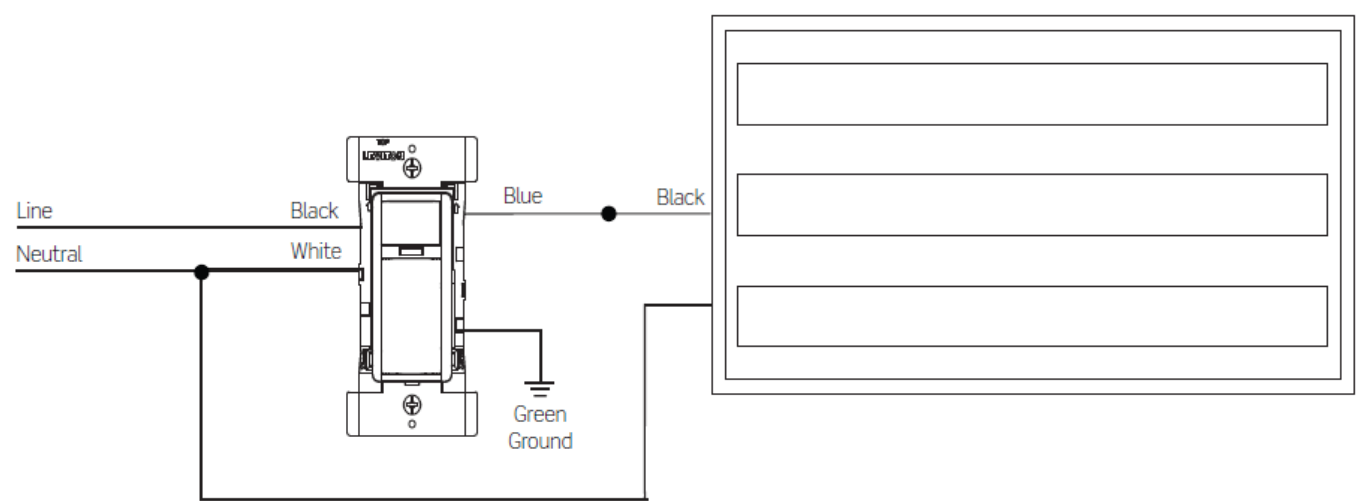

Field of View Diagram




Horizontal Beam Diagram

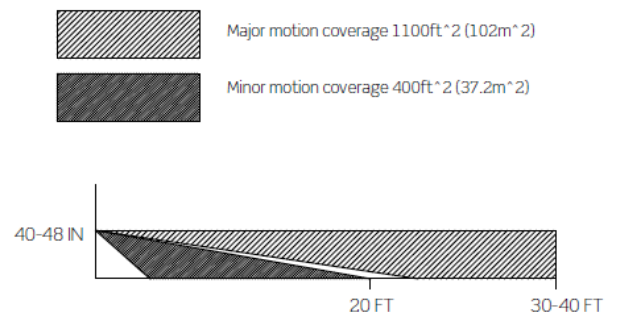


Vertical Beam Diagram


Dimensions Diagrams

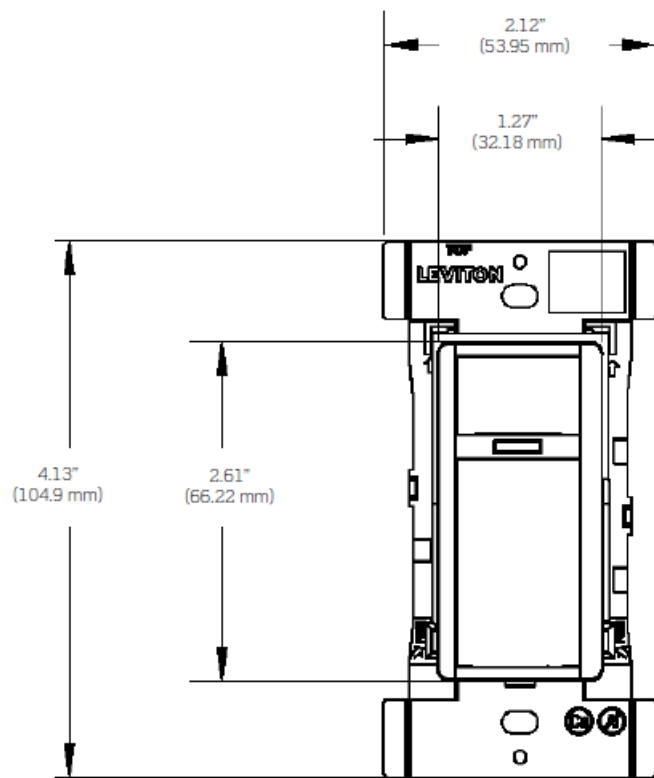

Front View

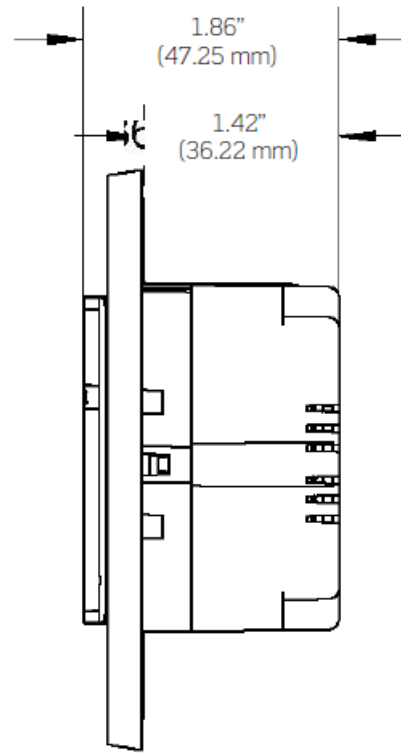

Side View

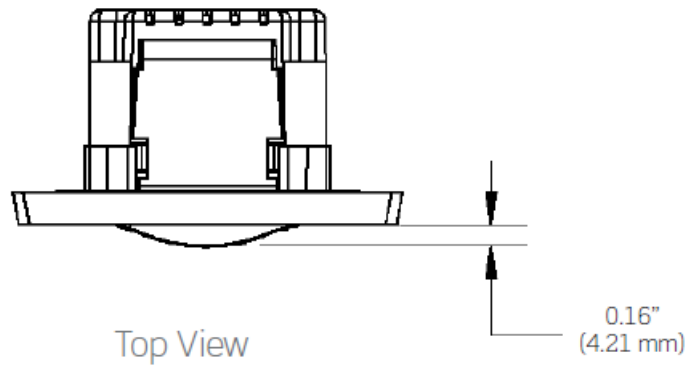

Top View

Specifications

Electrical	
Input Voltage/Frequency	
120-277VAC	50/60Hz
120VAC	60Hz
Input Current	
120V	Standby: 0.2W; Max: 0.5W+Load Current
277V	Standby: 0.3W; Max: 0.6W+Load Current
Load Ratings	
General Purpose @ 120V	20A
General Purpose @ 277V*	
LED/Electronic Ballast @ 120V	10A
LED/Electronic Ballast @ 277V*	
Standard Ballast @ 120V	
Standard Ballast @ 277V	
Tungsten @ 120V	6.67A
Tungsten @ 277V	
Motor @ 120V	1/4HP (FLA 5.8A)
Motor @ 277V	1/3HP (FLA 3.0A)
IP Rating	IP20
Network Connections	BLE 4.2, BLE 5.0
Environmental	
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-40 to 185°F (-40 to 85°C)
Physical	
Dimensions	4.13" x 2.12" x 1.86" (104.90mm x 53.95mm x 47.25mm)
Other	
Energy Codes	Can be used to comply with ASHRAE 90.1, IECC and 2022 Title 24, Part 6 occupancy/ vacancy sensing, and manual-ON/auto-OFF requirements
Listings	IECC, UL and cUL listed; JIS Z 2801:2000
Certifications	FCC, ICC
Warranty	Limited five-year warranty

Ordering Information

Smart Wallbox Sensors	
Cat. No.	Description
ODSMT-MDW	Smart Multi-Tech Wallbox Sensor, App configurable; Auto-ON/Auto-OFF or manual-ON/auto-OFF, neutral wire required, 120-277VAC, 50/60Hz; White
ODSMT-MDI	Smart Multi-Tech Wallbox Sensor, App configurable; Auto-ON/Auto-OFF or manual-ON/auto-OFF, neutral wire required, 120-277VAC, 50/60Hz; Ivory
ODSKT-00E	Smart Switching Wallbox Sensor Color Change Kit, Black
ODSKT-00R	Smart Switching Wallbox Sensor Color Change Kit, Red
ODSKT-00G	Smart Switching Wallbox Sensor Color Change Kit, Gray
ODSKT-00I	Smart Switching Wallbox Sensor Color Change Kit, Ivory
ODSKT-00T	Smart Switching Wallbox Sensor Color Change Kit, Light Almond
ODSKT-00W	Smart Switching Wallbox Sensor Color Change Kit, White

Note: Wallplate sold separately.

- **Leviton Manufacturing Co., Inc. Lighting & Controls**

10385 SW Avery St, Tualatin, OR 97062 tel 800-736-6682 tech line (6:00AM-4:00PM PT Mon-Fri) 800-959-6004

- **Leviton Manufacturing Co., Inc. Global Headquarters**

201 North Service Road, Melville, NY 11747-3138 tel 800-323-8920 tech line (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun 800-824-3005


- **Visit our Website at: www.leviton.com/smartsensors**

©2023 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Leviton Manufacturing Co., Inc. Lighting & Controls

201 North Service Road, Melville, NY 11747-3138 tel 800-323-8920 tech line (8:00AM-10:00PM ET Mon-Fri, 9:00AM-7:00PM ET Sat, 9:00AM-5:00PM ET Sun 800-824-3005 ©2023 Leviton Manufacturing Co., Inc. All rights reserved. Subject to change without notice.

Documents / Resources

	<p>LEVITON ODSMT-MDx Smart Multi Tech Wallbox Sensor [pdf] Owner's Manual ODSMT-MDx Smart Multi Tech Wallbox Sensor, ODSMT-MDx, Smart Multi Tech Wallbox Sensor, Multi Tech Wallbox Sensor, Wallbox Sensor, Wallbox Sensor</p>
---	--

References

- [🌐 Smart Sensor: Occupancy, Vacancy, Dimming, Light Integrated](#)
- [User Manual](#)