



LIBERTY DAC II Uploader Twittering Machines User Guide

[Home](#) » [LIBERTY](#) » LIBERTY DAC II Uploader Twittering Machines User Guide 

LIBERTY DAC II Uploader Twittering Machines User Guide



Contents

- [1 Firmware uploading](#)
- [2 Disclaimer](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

Firmware uploading

Step 1. Power OFF your device

Please press and hold [Input] button to power off your device.


Step 2. Run Liberty DAC II Uploader App

After installing Liberty DAC II Uploader application, a shortcut icon should appear on your Desktop. Double-click this shortcut to run it. From now, it will be searching for any Liberty DAC II device connected to your host machine. A searching process is indicated by a spinner.



Step 3. Power ON your device in Service Mode


To perform software update for the first time, it is recommended to turn-on your device in **Service Mode**.

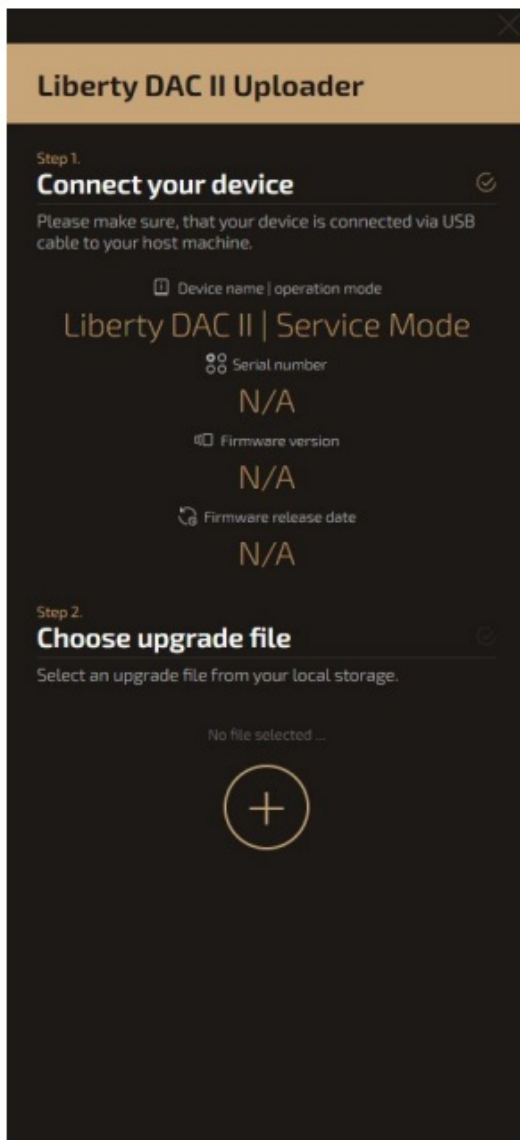

To do so, press and hold [Volume] knob button, then power-on your device by pressing and holding [Input] button (while still holding [Volume] knob button). After hearing a “click” from device, release [Input] button and then release [Volume] knob button. Your device should be discovered by Uploader App as Liberty DAC II device running Service Mode (which will be indicated by MQA diode Orange color).


Step 4. Choose upgrade file

Now, click on [Add] button to select upgrade file from your local machine. Your file will be loaded to Uploader App and displayed by its filename.

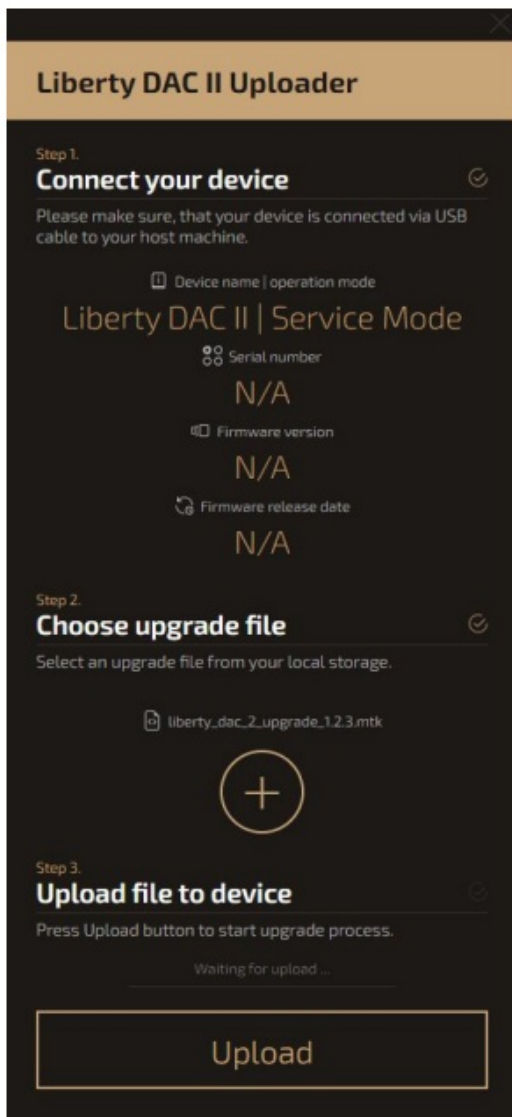


Step 5. Start uploading process

When your file is chosen, an Upload button should appear at the bottom of Uploader App. Press this button to start upgrading procedure. Uploader App should gray out, and a progress bar should indicate uploading process completion.

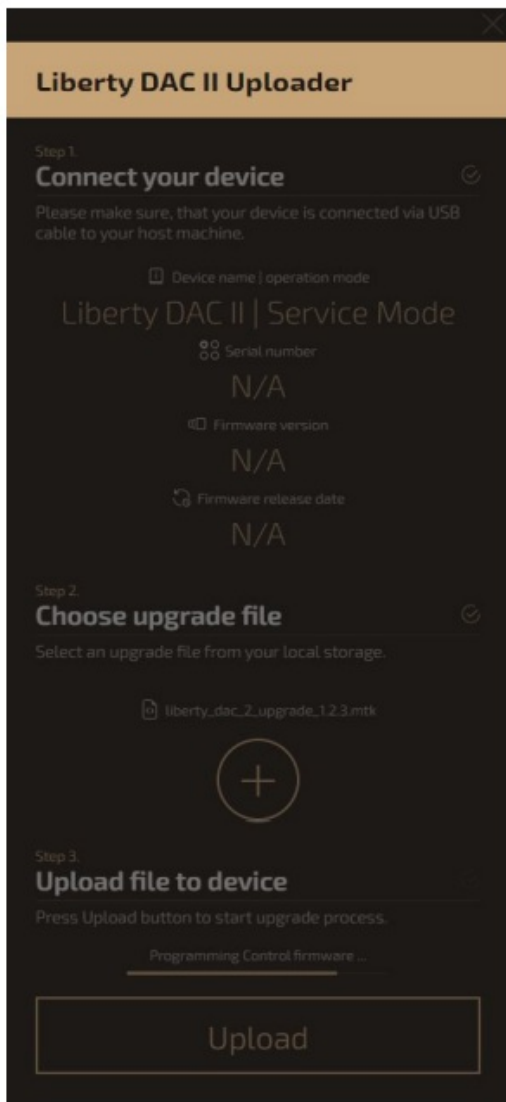

Step 6. Verify your update

After uploading completion, Liberty DAC II will perform a Software Reset to apply changes related to firmware update. Your device should be re-connected and re-discovered by Uploader App as Liberty DAC II running User Mode. Please verify if current firmware version matches desired one.

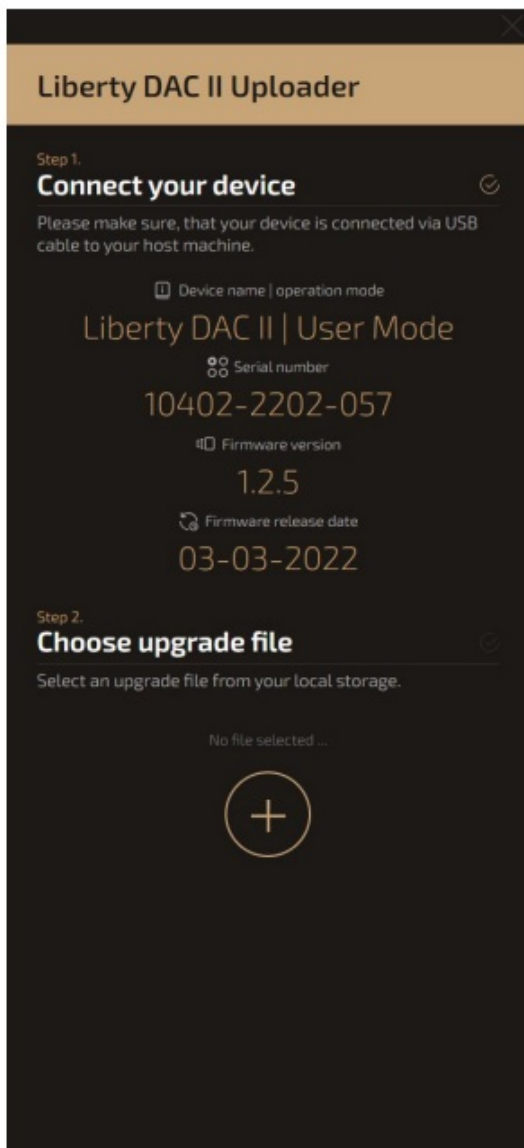

Disclaimer

Welcome to Liberty DAC II Uploader Application. We hope that it will help you to upgrade your device to newest firmware without any problems. Please follow instruction steps carefully.

After successful firmware upgrade, all User settings (like stored [Volume] or selected [Input]), will be restored to default factory settings.

Depending on your current firmware version, your Remote Controller will be unpaired from Liberty DAC II due to internal memory improvements and other enhancements. To re-pair it, please press and hold [Menu] + [Select] or [Menu] + [Next] buttons on Remote Controller for at last 5s (device will confirm pairing procedure by blinking Volume LED's).

For more detailed information about current firmware changes, please follow README file.

Documents / Resources

<div>Liberty DAC II Uploader</div> <div>User Guide</div> <div>Version 1.0</div>	<div>LIBERTY DAC II Uploader Twittering Machines [pdf] User Guide</div> <div>DAC II, Uploader Twittering Machines, DAC II Uploader Twittering Machines, Twittering Machine s, Machines</div>
---	--