



## LiftMaster 828LM Internet Gateway User Guide

[Home](#) » [LiftMaster](#) » LiftMaster 828LM Internet Gateway User Guide 

# LiftMaster®

### Lift Master LIFTMASTER® INTERNET GATEWAY USER'S GUIDE Featuring MyQ® Technology

This User's Guide will help you get the most from your LiftMaster® MyQ® enabled products when using a smartphone, tablet, or computer to monitor and control your garage door opener, gate operator, light controls, or other MyQ® enabled products.

#### Contents


- [1 CONNECT & CREATE](#)
- [2 REGISTER LIFTMASTER® INTERNET GATEWAY & ADD DEVICES](#)
- [3 CHANGING Mylar. APP SECURITY SETTINGS](#)
- [4 APPLE APP CONTROLS](#)
- [5 ANDROID APP CONTROLS](#)
- [6 ALERTS](#)
- [7 Tips](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

## CONNECT & CREATE

- See the "LiftMaster MyQ® Quick Start Guide" for instructions for the connection of your LiftMaster® Internet Gateway to the Internet. You MUST use a computer for this step; you cannot create an account from a mobile device. Go to [www.myliftmaster.com](http://www.myliftmaster.com) to create an account and connect the Internet Gateway.
- You must have a valid email address to create a LiftMaster® MyQ® account. Enter your information and click submit, an email will be sent to you to confirm your valid email address. If you do not get a confirming email,

check your spam email folder or try creating the account again, being careful to spell the email address correctly.

- When the LiftMaster® Internet Gateway powers up, the GREEN LED and BLUE LED will blink four times to indicate a correct power connection and reset of the Internet Gateway. After power-up, the LEDs will indicate the status of the LiftMaster® Internet Gateway. Refer to the “tips” section for details regarding the LED indicators.
- If the GREEN LED is off after connecting the LiftMaster® Internet Gateway to your router, check the Ethernet cable connected to your router. It must be in the LAN port, (normally numbered 1 — 4). If the GREEN LED is still off, try another port on your router. If you still cannot get a solid GREEN LED, contact LiftMaster® Technical Support at [technical.support@liftmaster.com](mailto:technical.support@liftmaster.com) or at 1-800-528-9131.

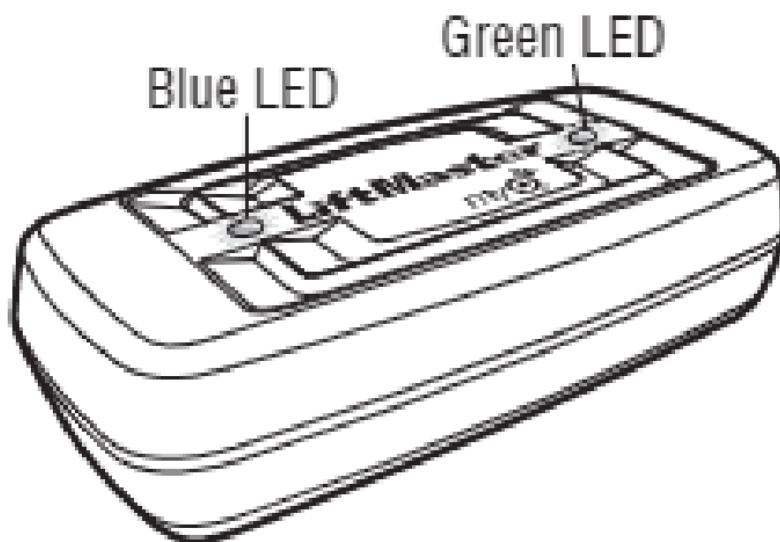

If you have additional questions or problems after reviewing this User's Guide, please contact LiftMaster Technical Support at [technical.support@liftmaster.com](mailto:technical.support@liftmaster.com) or at 1-800-528-9131.



## **REGISTER LIFTMASTER® INTERNET GATEWAY & ADD DEVICES**

Once you have successfully created your LiftMaster™ Mya' account, you must add the LiftMaster™ Internet Gateway to the account. It is easy to do from a computer; this can also be done from an internet-enabled smartphone or tablet. See section 3 for downloading the MyQ app and sections 5 and 6 for using the app.

- To add the LiftMaster™ Internet Gateway to your account, the GREEN LED on the Internet Gateway must be on


continuously. If the GREEN LED is off, see Section 1. Connect & Create. The Liftmaster Internet Gateway must have an internet connection for the website or phone to find it.

- In the [www.myliftmaster.com](http://www.myliftmaster.com) website, add the LiftMaster Internet Gateway. Click on “Manage Places” to add the Internet Gateway. If this is the first LiftMaster Internet Gateway connected to the account, the screen will already be at the step of “Register Gateway”. You will need the SERIAL NUMBER from the bottom label of the Internet Gateway. The serial number is a series of ten characters, 0 — 9 or a — f. Be sure to use the correct characters (e.g., a zero “0” instead of an “O”) and keep the character spacing correct (XXXX-XXX-XXX). If this is the second LiftMaster Internet Gateway to be added, just click on “Manage Places>Add New Place”. For instructions on how to complete this step with the MyO® app, see sections 5 and 6
- Name the LiftMaster Internet Gateway (e.g., “123 Main Street” or “Home Sweet Home”). Click “Save and Close” to complete this step.
- You can add My03 devices like the garage door opener, gate operator, lights, or other accessories from the “Manage Places” page, or you can download the My09 app and add any Mya, device from a smartphone or tablet. To add the garage door opener or other devices, click on “Manage Places>Add New Device” and follow the steps.

Once you click ADD you have 3 minutes to go to the garage door opener or device and press its learn button. To add a gate operator ensure that the gate is closed. Give the operator an OPEN command. Within 30 seconds, when the gate is at the open limit press and releases the reset button 3 times (on the primary gate). The Liftmaster Internet Gateway will pair to the operator. Once a device is programmed, it will appear on the screen. You can then name the device (e.g., left garage door, table lamp, etc.).

## GETTING A SMARTPHONE APP

If you have an older OS, the phone or tablet will not be able to locate the Myaiapp. You may need to upgrade the phone's OS to be able to find, download, and use the Myas app. Smartphone apps are available for Apple® and Android devices:

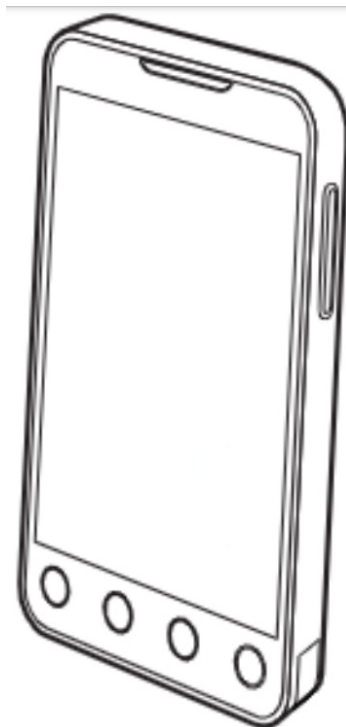

- Apples!Phone, Par-, and iPod Touch

-Visit the Apple App Stores™ from your Apple device to download the Myas app (search for 'MyQ' by The Chamberlain Group, Inc.).

- **Android smartphones and tablets**

-Visit Google Play from your smartphone to download the Myas' app (search for 'MO" by The Chamberlain Inc.).

- **BlackBerry, Windows. and other smartphones**

- You can access your Mya account to monitor and control your garage door opener, gate operator, and other MyQ<sup>2</sup> accessories on other smartphones by pointing your phone's browser to [www.myliftmaster.com/mobile](http://www.myliftmaster.com/mobile).
- Bookmark this page for later use.
- The mobile website has the same functionality as the smartphone apps.

After the app is installed on your smartphone, you can add a new device to your account by following the instructions for your smartphone in Sections 5 — 6.



## CHANGING Mylar APP SECURITY SETTINGS

You can change the **SECURITY SETTINGS** of the MyQ® app to allow quicker access to your devices and account. The default security setting for the app is at the highest level: you must enter your email and password credentials every time to launch the app or to access and change your account settings. The security settings apply to each individual phone, so each phone tied to the same account must be configured separately. These settings do not affect the web page login. A four-Digit **PASSCODE** can be created in place of your email and password credentials. See "Creating a Passcode" below.

### Default MyCY App Security Settings

- **Launching App** — high security is initially set to *ON*. You must enter your email and password credentials every time the app is launched. Setting this to *OFF* allows the app to launch without requiring your credentials or a 4-digit passcode.
- **Accessing Account** – high security is initially set to *ON*. You must enter the email & password credentials every time you want to access your account settings. Setting this to *OFF* lets you access your account settings

without requiring your credentials or a 4-digit passcode.

- **Opening Door/Gate** – high security was initially set to *OFF*. If you turn it ON, you must enter your email and password credentials or a 4-digit passcode every time you want to use the app to open your door or gate. Setting this to OFF lets you open your door or gate without requiring your credentials or a 4-digit passcode. It is strongly recommended that if you turn OFF the security settings for launching the app, you set this function to ON and create a 4-digit passcode for opening the door or gate. This prevents anyone from using your phone to get into your garage.

### **Creating a Passcode**

You can create a 4-digit PASSCODE within the Mya” app that automatically replaces your email and password credentials. You may want to use the same code as your outside keypad for ease of use.

- The passcode is four characters (numbers or letters, depending on your smartphone).
- When you create your 4-digit passcode, the app will ask for the passcode twice.
- If you use the “Account > Logout” function on the smartphone, your passcode will be automatically deleted; restarting the app will require the creation of a new passcode.
- See the section on your smartphone (Apple or Android) for specific instructions on how to create a 4-digit passcode.

## **APPLE APP CONTROLS**

### **Controlling a device**

(a garage door opener, gate operator, light, etc.)

Go to Places

- Swipe left or right to select a device (to see more than one door, gate, or light).
- Tap the door or gate image to open/close the door or gate.
- Tap the light image to turn a light on/off. – If a device is grayed out, it is currently unavailable (e.g., if a light control was unplugged)

### **Security settings**

(see section 4 for details)

Go to Accounts > My Account > Security

- Set security for launching app.
- Set security for accessing the account.
- Set security for opening the garage door.

If security is set to ON, you must enter your email and password, or 4-digit passcode.

### **Setting a 4-digit passcode**

Go to Accounts > My Account > Passcode

- Enter a 4-digit passcode: you must enter this twice.

The 4-Digit passcode now replaces email and password for security.

The 4-Digit passcode is deleted if you log out: restarting the app will require the creation of a new passcode.

**Add/delete/rename a device**

(a garage door opener, gate operator, light etc.)

Go to Places: tap the gear in the upper left corner of the screen

To Add:

- Tap the LiftMaster<sup>i4</sup> Internet Gateway name
- Tap Add New Device



To Delete:

- Tap the LiftMaster® Internet Gateway name
- Tap Edit
- Tap the “-“(minus sign)

To Rename:

- Tap the LiftMaster<sup>o4</sup> Internet Gateway name
- Tap Edit
- Tap the device’s name and enter a new name

**Add/delete/rename a LiftMaster Internet Gateway**

Go to Places; tap the gear in the upper left come. of the screen

To Add:

- Tap the “+” (plus) To Delete:
- Tap the (minus)

To Rename:

- – Tap the LiftMaster<sup>o4</sup> Internet Gateway name
- Tap Edit
- Tap the Internet Gateway name and enter a new name

## Logging out

- A logout requires an email and password to restart the app.
- A logout will delete the passcode: restarting the app will require the creation of a new passcode.

## ANDROID APP CONTROLS

### Controlling a device

(a garage door opener, gate operator, light, etc.)

Go to the Places tab

Swipe right or left to select a device (to see more than one door, gate or light)

- Tap the door or gate image to open/close the door or gate
- Tap the light image to turn a light on/off
- If a device is grayed out, it is currently unavailable (e.g., if a light control was unplugged)

### Security settings

(see section 4 for details) Go to the Account tab Tap “My Account” Tap Security

- Set security for launching the app.
- Set security for accessing the account.
- Set security for opening the garage door.

Tap “Done” to save settings.

If security is set to ON, you must enter your email and password, or 4-digit passcode. A logout will delete the passcode: restarting the app will require the creation of a new passcode.

### Setting a passcode

Go to the Account tab

Tap “My Account”

Tap “Passcode”

- Enter a 4-digit passcode (PIN): you must enter this twice.

The 4-Digit passcode now replaces email and password for security.

### Add/delete/rename a device

(a garage door opener, gate operator, light etc.)

Go to the Places tab

Menu button > Manage Places



Select your place (LiftMaster® Internet Gateway )

To Add:

- Menu button > Add New Device
- Then follow instructions

To Delete:

- Press and hold the device name
- Tap “Delete Device”

To Rename:

- Tap the device’s name
- Rename, then select “Save” to save changes

### **Add/delete/rename a LIUMaster Internet Gateway**

Go to the Places tab

Menu button > Manage Places To Add:

- Menu button > Add New
- Then follow the instructions To Delete:

- Press and hold places name
- Tap “Delete Gateway”

To Rename:

- Press and hold places name
- Tap “Edit”
- Rename, then select “Save” to save changes

### **Logout**



Go to the Account tab  
Menu button > Log Out

A logout requires an email and password to restart the app. A logout will delete the passcode: restarting the app will require the creation of a new passcode.

## ALERTS

The alert feature allows Maya users to receive electronic notifications (alerts) when a certain event occurs (e.g. the garage door opens or closes). An alert can be enabled, edited, or disabled with any Internet-enabled computer or smartphone. Multiple alerts can be enabled for any garage door opener, gate operator, or light control. An alert can be received on an internet-enabled smartphone or computer from anywhere in the world.

### Event Options:

- The door or gate opens/closes
- The door or gate remains open for an extended period of time
- The light turns on/off

### Event Settings:

- All times and all days
- Specific days of the week (e.g. weekends only)
- Specific time (e.g. 8:00 am to 6:00 pm)



### Alert Options:

- Email — An alert will be sent to the Myst" account email address
- Push Notification — An alert will be sent to each smartphone/tablet with the MyO app installed that has logged into the MyQ® account at least once.

**NOTE:** Push notifications can be enabled/disabled through the smartphone or tablet settings.

- An email and push notification simultaneously

### Event History

Whenever the designated event occurs the event history will display the event, including the time and day of the occurrence. The event history can be deleted.

## Tips

**What do** the LEDs on the LiftMaster® Internet Gateway signify?

- **The GREEN LED** must be on continuously after power and network connections are completed i *NOTE: The LED may blink intermittently with data traffic).*
- **GREEN LED Off** – The router is not providing an IP address to the LiftMaster Internet Gateway. Check your router settings and internet connections.
- **GREEN LED flashing steadily On & Off** – The LiftMaster® Internet Gateway has an IP address, but is not accessing the Internet. Check your router settings and Internet connections.
- **GREEN LED On Solid** – The LiftMaster® Internet Gateway has an IP address and is connected to the Internet.
- **The BLUE LED Indicates the LiftMaster® Internet Gateway** has programmed **at least one device** like a garage door opener, gate operator, or other MyQ™ enabled product. The blue LED does not indicate if devices are connected; it only indicates that the Internet Gateway has “programmed” one device to its memory.
- The **YELLOW LED** Indicates the LiftMaster Internet Gateway Is In the “Add New Device” or learn mode. otherwise, the LED will remain off.

### Changing My App Security Settings

- You can change the SECURITY SETTINGS of the MyQ™ app for quick access to your devices and your account. The default security setting for the app is high. If desired, you can lower the Security Settings of the app. See Section 4.

**IMPORTANT NOTE:** The MyQ app is designed to work with Android™ smartphones and select Android™ tablets. Full functionality of the MyQ™ app on Android™ tablets may not be available.

### Documents / Resources

