

logitech®

logitech MK955
Signature Slim
Combo Keyboard
Mouse



logitech MK955 Signature Slim Combo Keyboard Mouse User Guide

[Home](#) » [Logitech](#) » logitech MK955 Signature Slim Combo Keyboard Mouse User Guide 

Contents

- [1 logitech MK955 Signature Slim Combo Keyboard Mouse](#)
- [2 Product Usage Instructions](#)
- [3 KNOW YOUR PRODUCT](#)
- [4 GETTING STARTED](#)
- [5 KEYBOARD FUNCTIONS](#)
- [6 BATTERY STATUS NOTIFICATION](#)
- [7 DIMENSIONS](#)
- [8 TECHNICAL SPECIFICATIONS](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

logitech®

logitech MK955 Signature Slim Combo Keyboard Mouse



Specifications

- Caps Lock key with white LED
- Easy-Switch keys / Connection key with white LED
- Battery status LED (green/red)
- Adjustable tilt legs
- SmartWheel with customizable buttons
- DPI button
- Low Energy (BLE) connection

Product Usage Instructions

Pairing via Logi Bolt Receiver

1. Take the Logi Bolt receiver from the packaging tray without removing pull-tabs from the keyboard.
2. Insert the receiver into any available USB port on your computer.
3. Remove the pull-tabs from the keyboard and mouse. The white LED on the Easy-Switch key will blink.
4. Long press the appropriate key for 3 seconds to set the layout for Windows, macOS, or ChromeOS.

Pairing via Bluetooth

1. Remove the pull-tabs from the keyboard and mouse for automatic activation.
2. Wait for the blinking LED on the Easy-Switch key to stop.
3. Input a random set of numbers on your computer and press Enter to complete the pairing process.

Connecting to Multiple Devices

1. Use the Easy-Switch keys on both the keyboard and mouse to connect to different devices.
2. To connect to a second device, press and hold the second Easy-Switch key for 3 seconds.
3. Follow the pairing method for each additional device using the Easy-Switch keys.

Dongle Compartment

1. If not using the Logi Bolt USB receiver, store it inside the keyboard by following the provided steps.

FAQ

• Q: How do I know if my keyboard and mouse are paired?

A: The LED on the Easy-Switch key will stop blinking once they are successfully paired.




• Q: Can I connect the keyboard and mouse to multiple devices simultaneously?

A: Yes, you can use the Easy-Switch keys to connect them to different devices and switch between them easily.

SIGNATURE SLIM COMBO MK955/MK950 FOR BUSINESS

Setup Guide

KNOW YOUR PRODUCT

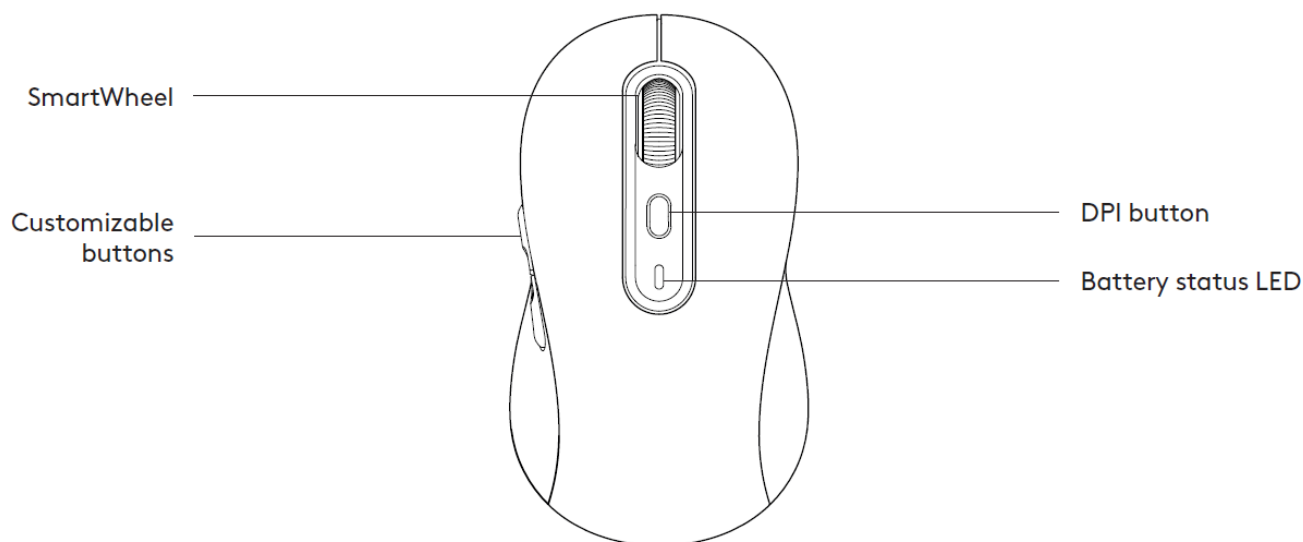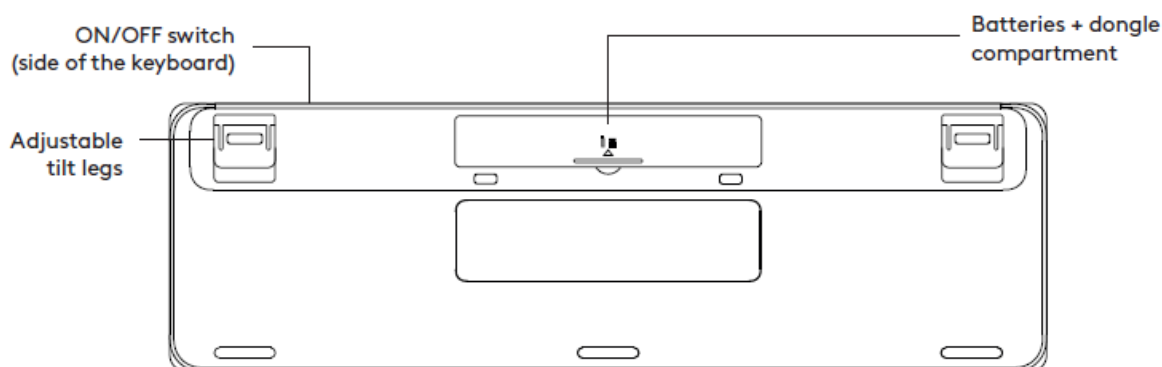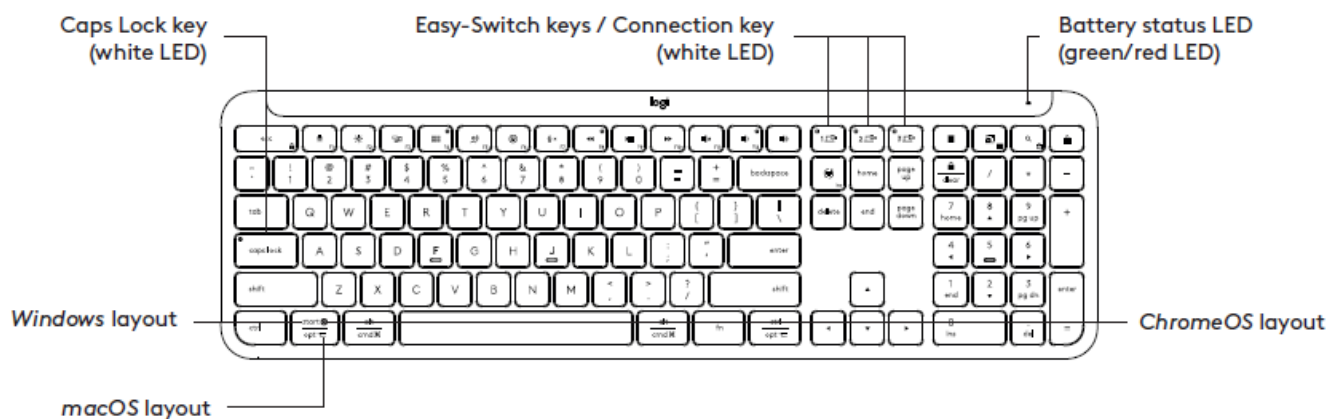

GETTING STARTED

Connect your keyboard and mouse to your device. Choose how you want to pair your keyboard to your device. You have 2 options:

Option 1: Through our Logi Bolt receiver

Option 2: Through direct Bluetooth®

To pair through Logi Bolt receiver:


STEP 1:

Take the Logi Bolt receiver from the packaging tray that was holding your keyboard

IMPORTANT: Don't remove the pull-tabs from your keyboard yet


STEP 2:

Insert the receiver into any available USB port on your desktop or laptop

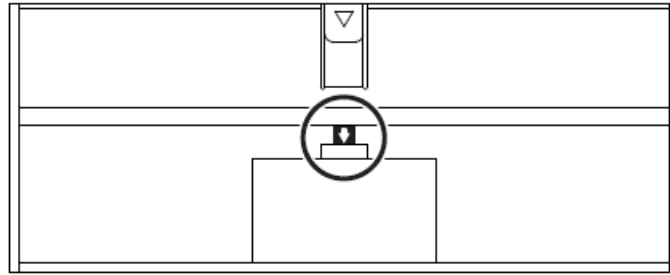**STEP 3:**


Now you can remove the pull-tabs from the keyboard and the mouse

The white LED on the first Easy-Switch key of the keyboard and mouse will start blinking

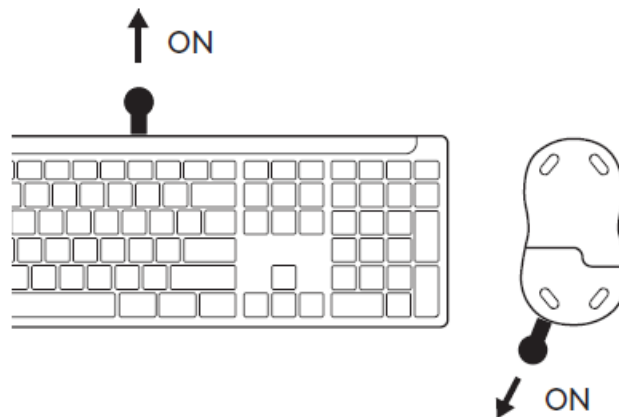**STEP 4:**

Set the right keyboard layout for your computer operating system:

Long press for 3 seconds the following shortcuts to set it up for Windows, macOS or ChromeOS

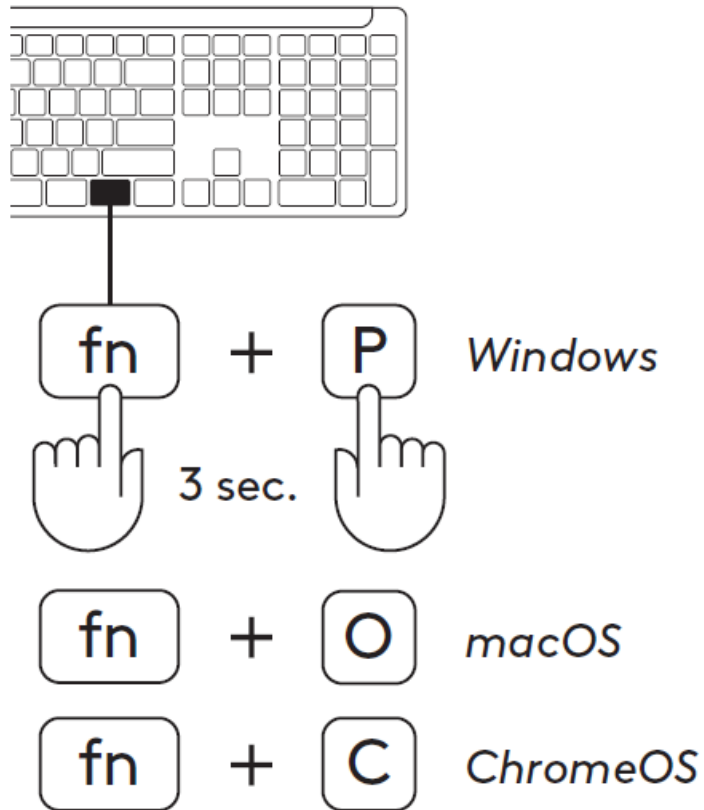


- Windows: Fn + P
- macOS: Fn+O
- ChromeOS: Fn+C

IMPORTANT: Windows is the default OS layout. If you are using a Windows computer, you can skip this step. Your keyboard and mouse are now ready to use.

To pair through Bluetooth®:

STEP 1:

Remove the pull-tabs from the keyboard and mouse. Both of them will automatically turn on.

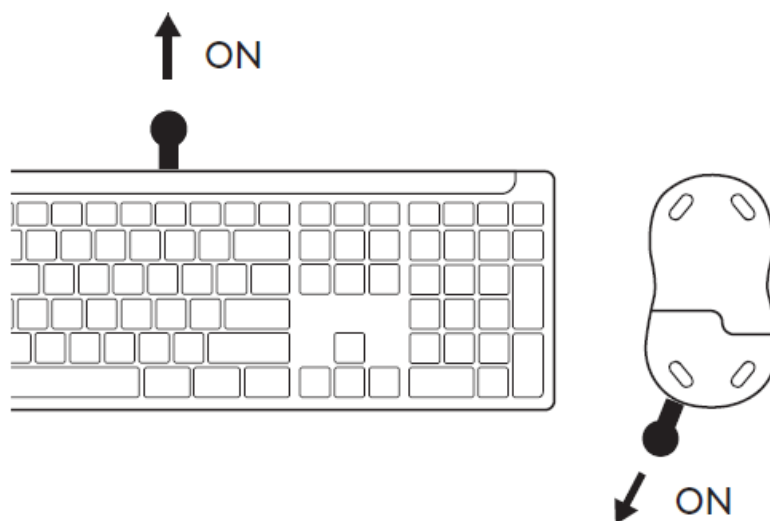


The white LED on the first Easy-Switch key of the keyboard and mouse will start blinking.

STEP 2:

Open the Bluetooth® settings on your device.


Add a new peripheral by selecting your keyboard and mouse (Keyboard: Logi K950, Mouse: Logi M750) from your list of devices

Your keyboard and mouse will be paired once the LED stops blinking

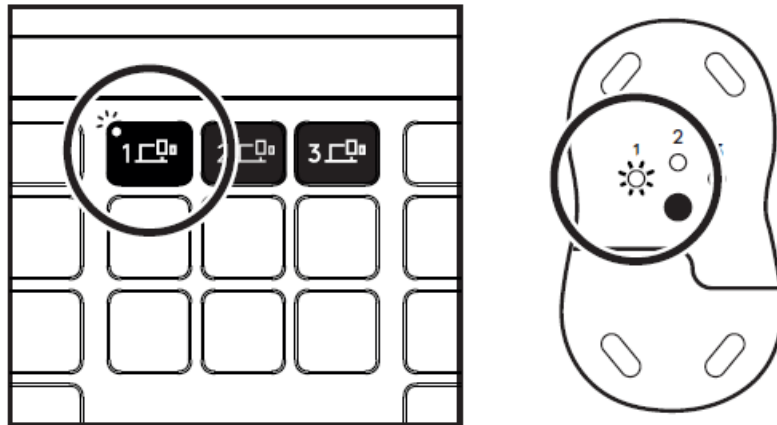

STEP 3:



Your computer will require you to input a random set of numbers, please type them all and press the “Enter” key on your keyboard Your keyboard is now ready to use

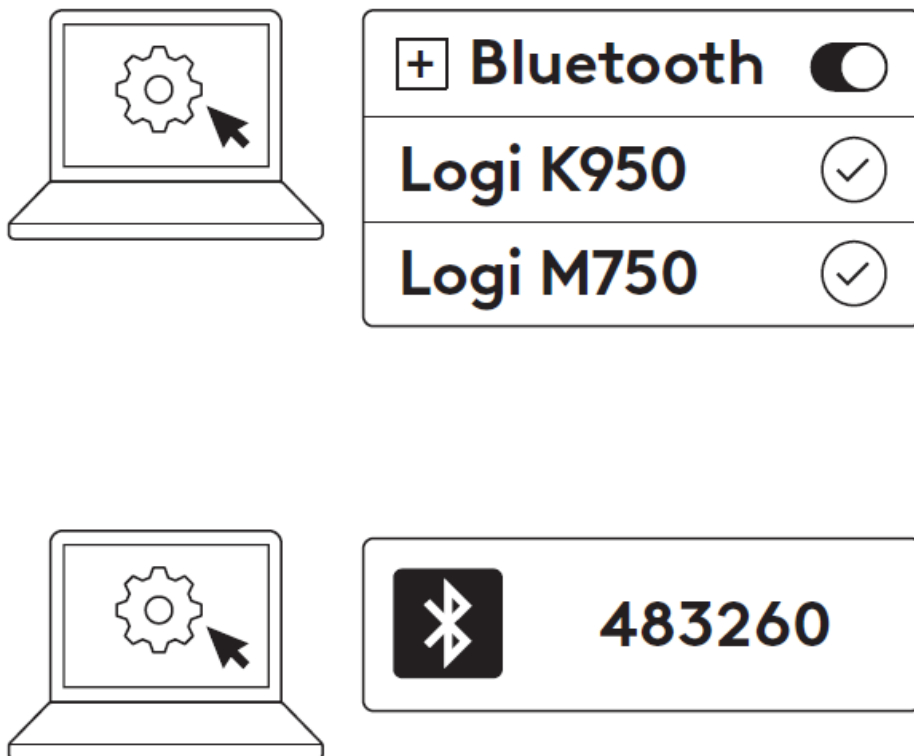

Connect your keyboard and mouse to multiple devices

There are 3 Easy-Switch keys each on your keyboard and the back of your mouse Connect one device to each of them

When you go through the steps above, the first Easy-Switch key on the keyboard and mouse should be connected to one device already

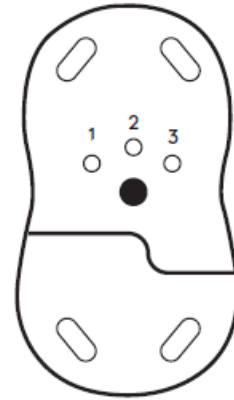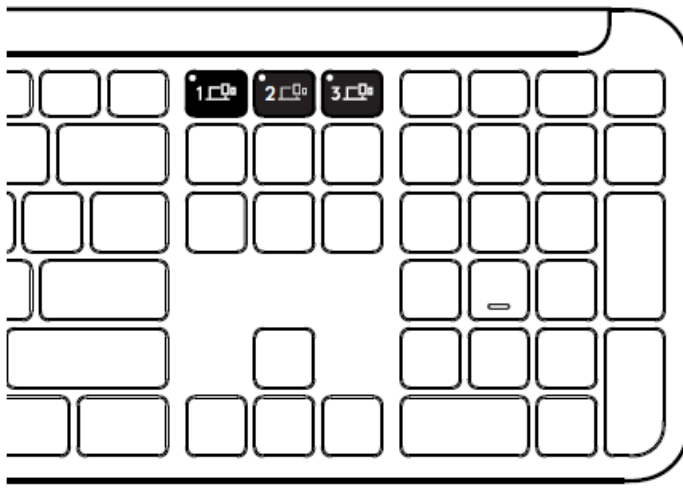

STEP 1:



To connect to a second device, press the second Easy-Switch key for 3 seconds to put it on pairing mode. The LED light will start blinking.

STEP 2:

Continue with any of the pairing methods above based on how you connected to your first device. Use the image on the left as an example; if you've connected your first device with a Logi Bolt receiver, your second device can be paired via Bluetooth®.

NOTE: Please be advised that you can use Bluetooth® connection on all the Easy-Switch keys, but the Logi Bolt receiver can only be used in one of them.

Use the same process to pair an additional device to the third Easy-Switch key.

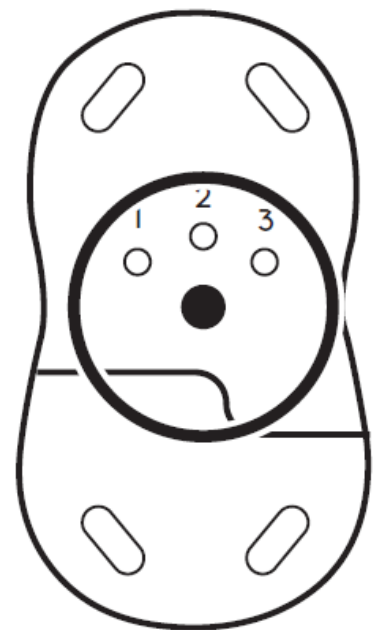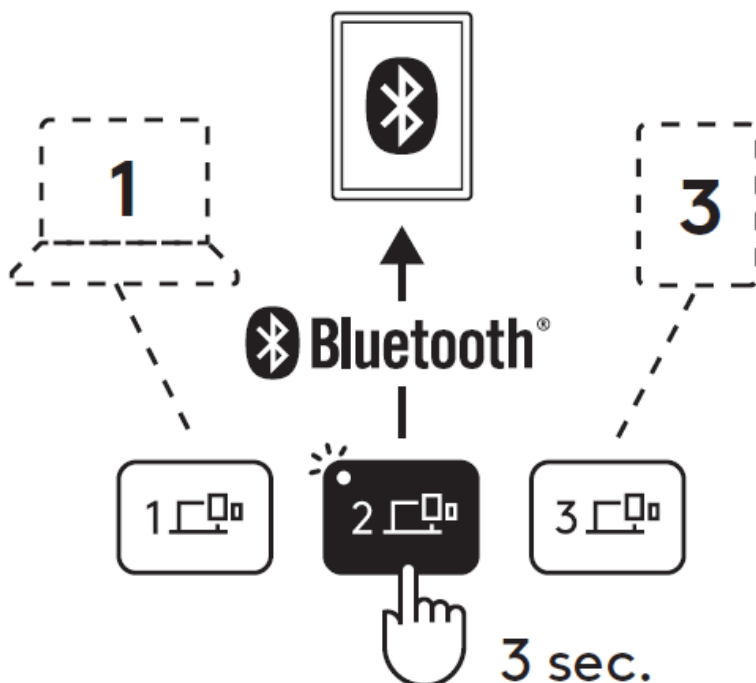


DONGLE COMPARTMENT

If you are not using your Logi Bolt USB receiver, you can safely store it inside your keyboard.



STEP 1:

Remove the battery door from the bottom side of your keyboard. The dongle compartment is located next to the batteries.

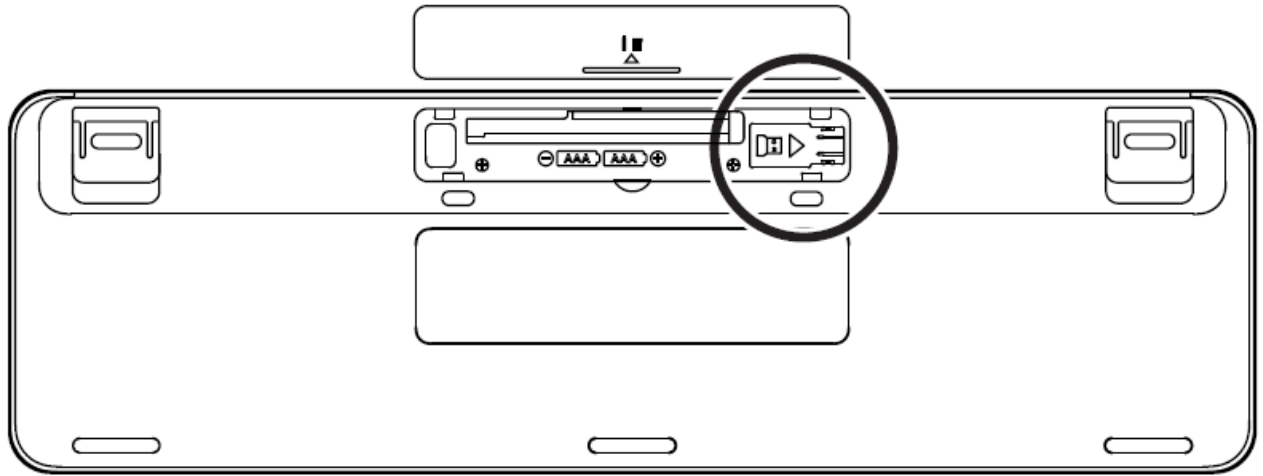





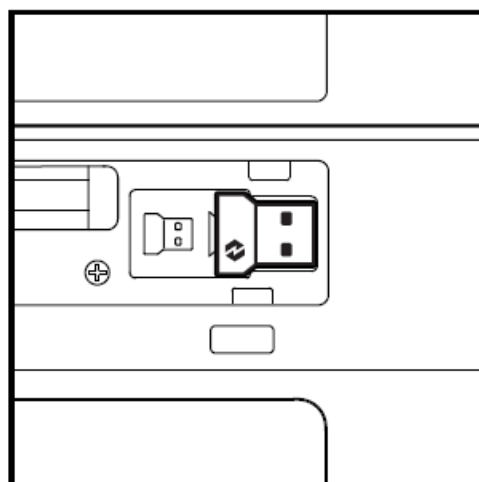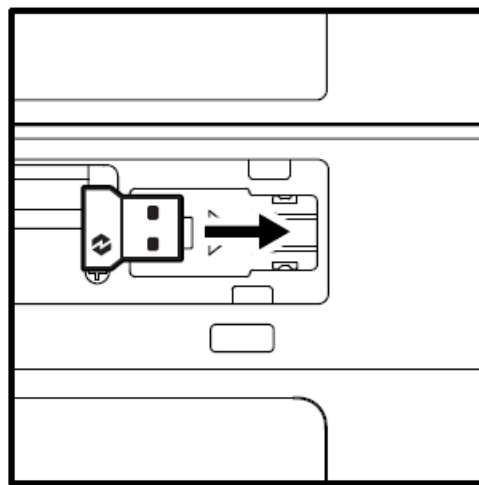


STEP 2:








Place your Logi Bolt receiver in the compartment and slide it to the right side of the compartment to secure it tight










KEYBOARD FUNCTIONS

You have a full range of useful productive tools on your keyboard that will help you save time and work faster:

F-Row Keys								
								
Main function	Windows	Escape	Brightness down	Brightness up	Task view	App switch	Dictation* ¹	Emoji* ²
	macOS				Mission control	Launchpad		Emoji
Secondary function		Fn lock	F1	F2	F3	F4	F5	F6

F-Row Keys								
								
Main function	Windows	Mute mic	Previous track	Play / Pause	Next track	Mute volume	Volume down	Volume up
	macOS							
Secondary function		F7	F8	F9	F10	F11	F12	—

Hot Keys								
								
Main function	Windows	Input language switch	Easy-Switch			Calculator	Snipping tool	Search
	macOS							
Secondary function		Insert	—			—	Contextual menu	Screen lock* ³

Most of these keys work without the need of installing software (Logi Options+), except for:

- Mute microphone key: Install Logi Options+ for it to work on Windows and macOS as system mute mic; works out of the box on ChromeOS It works out of the box on Microsoft Teams and Webex on Windows
- Calculator key: Install Logi Options+ for it to work on mac; works out of the box on Windows and ChromeOS

1. For Windows: Dictation key needs Logi Options+ App installed to work on Korean For macOS: Dictation key needs Logi Options+ installed to work on Macbook Air M1 and 2022 Macbook Pro (M1 Pro and M1 Max chip)
2. For Windows: Emoji key needs Logi Options+ App installed for France, Turkey, and Belgium keyboard layouts
3. For macOS: Screen lock key needs Logi Options+ App installed for France keyboard layouts


MULTI-OS KEYBOARD

Your keyboard is designed to work with multiple operating systems (OS): Windows, macOS, ChromeOS.

For Windows and macOS keyboard layout

If you are a Windows user, the special characters will be on the upper side of the key

NOTE: Windows layout is compatible with Linux and Android as well

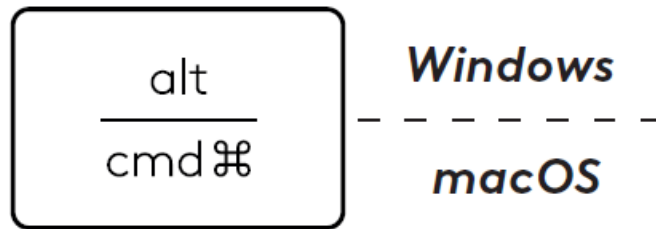


If you are a mac user, the special characters and keys will be on the lower side of the keys

NOTE: macOS layout is compatible with iOS and iPadOS as well


For ChromeOS keyboard layout

- If you are a Chrome user, you will find one dedicated Chrome function, Launcher key, on top of the start key
Make sure you have selected the ChromeOS layout (FN+C) when you connect your keyboard to your device

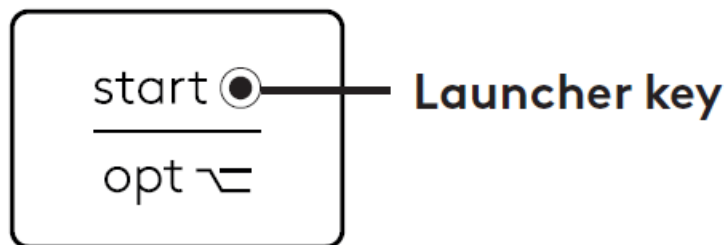


BATTERY STATUS NOTIFICATION

- When the battery level is between 6% to 100%, the LED color will stay green

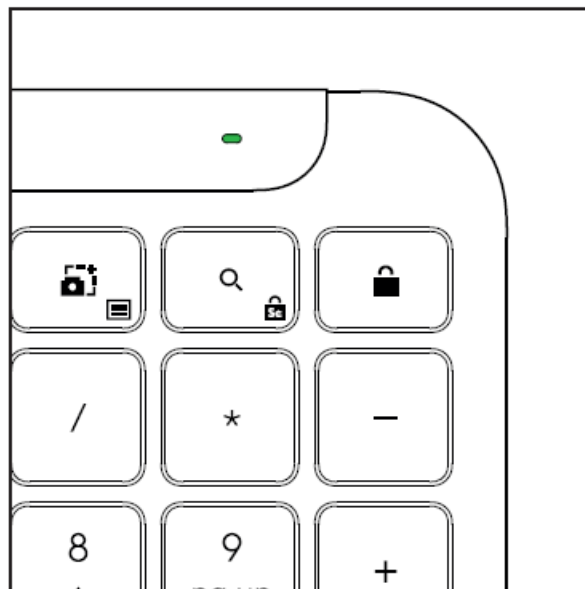

- When the battery level is below 6% (from 5% and below), the LED will turn into red You can continue using your device for 1 month when the battery is low

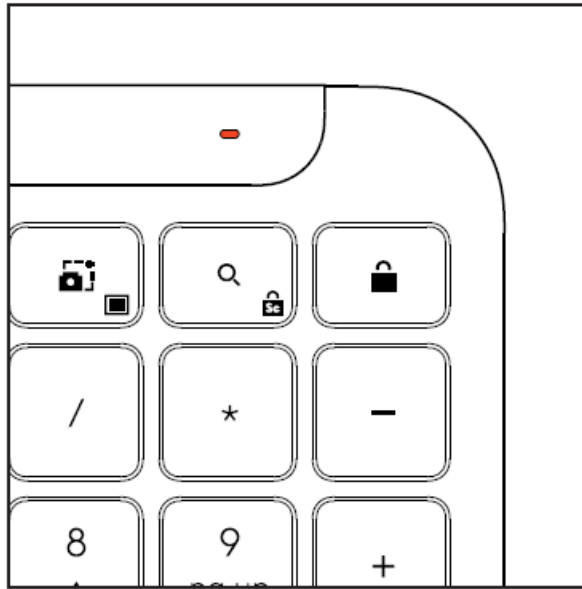

NOTE: Battery life may vary based on user and computing conditions

DIMENSIONS

Signature Slim K950 for Business

- Height: 134.8 mm (5.31 in)
- Width: 433.8 mm (17.08 in)
- Depth: 23.1 mm (0.91 in)
- Weight: 685 g (24.16 oz) with batteries

For MK950 Signature Plus M750 for Business

- Height: 108.2 mm (4.26 in)
- Width: 61 mm (2.4 in)
- Depth: 38.8 mm (1.52 in)
- Weight: 101.3 g (3.57 oz) with batteries

For MK955 Signature Plus M750 L for Business

- Height: 118.7 mm (4.67 in)
- Width: 66.2 mm (2.61 in)
- Depth: 42 mm (1.65 in)
- Weight: 115.4 g (4.07 oz) with batteries

USB-A Receiver:

- Height: 18.7 mm (0.74 in)
- Width: 14.4 mm (0.57 in)
- Depth: 6.1 mm (0.24 in)
- Weight: 1.7 g (0.06 oz)

SYSTEM REQUIREMENTS

Logi Bolt USB Receiver

- Windows 11 or later¹
- macOS 11 or later²
- ChromeOS²
- Linux²

Bluetooth® Low Energy Wireless (BLE) Technology

- Windows 11 or later¹
- macOS 11 or later¹
- iPadOS 14 or later²
- iOS 14 or later^{2, 3}
- ChromeOS²
- Linux²
- Android 9.0 or later²

1. Customize device by installing the Logi Options+ App available on Windows and macOS at app.logi.com
2. Logi Options+ App is currently not supported. The device's basic functions will work without it.
3. Mouse not supported by iOS.

Certified for

Works With Chromebook

TECHNICAL SPECIFICATIONS

Wireless technology

- Logi Bolt USB-A receiver
- Bluetooth® Low Energy (BLE) version: 5.1
- Wireless range: up to 10 m/33 ft (with an open line of sight)¹

Keyboard:

- Battery: Alkaline, 2 x AAA batteries (included); up to 3 years²
- Full-size layout with number pad
- On/Off power switch
- Tilt legs: 4° (default) or 8° typing angle
- LED lights: Caps Lock, Battery and Easy-Switch keys indicator lights
- Multi OS printed layout (Windows/Mac/Chrome)
- Easy-Switch Keys (connect up to 3 devices)

Mouse:

- Battery: Alkaline, 1 x AA battery (included); up to 2 years².
- SmartWheel technology
- Contoured shape with rubber grips
- Number of buttons: 6 (Left/Right-click, Scroll-wheel with middle click, side buttons, DPI button)
- On/Off power switch
- LED lights: Battery indicator and Easy-Switch indicator lights

Sensor technology:

- Logitech Advanced Optical
- Nominal value: 1000 DPI
- DPI (Minimal and maximal value): 400-4000 DPI (can be set in increments of 100 DPI)

Customization app


- Supported by Logi Options+ on Windows and macOS
- 1 Wireless range may vary depending on operating environment and computer setup.
- 2 Battery life may vary based on user and computing conditions.

www.logitech.com/prosupport/mk955B





www.logitech.com/prosupport/mk950B

© 2024 Logitech Logitech, Logi, Easy-Switch, Logi Bolt, Logi Options+, the Logitech logo and the Logi logo are trademarks or registered trademarks of Logitech Europe S A and/or its affiliates in the U S and other countries The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc and any use of such marks by Logitech is under license Windows are trademarks of the Microsoft group of companies App Store, Apple, macOS, iOS, and iPadOS are trademarks of Apple Inc Android, and Chrome are trademarks of Google LLC Logitech ssumes no responsibility for any errors that may appear in this manual Information contained herein is subject to change without notice
WEB-621-002565 002

Documents / Resources

	<p>logitech MK955 Signature Slim Combo Keyboard Mouse [pdf] User Guide MK955, MK955 Signature Slim Combo Keyboard Mouse, Signature Slim Combo Keyboard Mouse, Slim Combo Keyboard Mouse, Keyboard Mouse, Mouse</p>
---	--

References

-  [Logi Options+ \(Plus\): Customization App for Logitech Devices](#)
-  [Logitech | Official Online Store](#)
-  [Logitech B2B Support](#)
-  [Logitech B2B Support](#)
- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.