



LUXRITE LR23700 Series CCR Color Change Round Mini Panel Installation Guide

[Home](#) » [LUXRITE](#) » LUXRITE LR23700 Series CCR Color Change Round Mini Panel Installation Guide 

Contents

- [1 LUXRITE LR23700 Series CCR Color Change Round Mini Panel](#)
- [2 TOOLS REQUIRED:](#)
- [3 INSTRUCTIONS:](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)



LUXRITE LR23700 Series CCR Color Change Round Mini Panel

**WARNING**

FOR SAFETY, READ AND UNDERSTAND INSTRUCTIONS cOMPLETELY BEFORE STARTING INSTALLATION. ELECTRICITY SHOULD BE TURNED OFF AT THE FUSE OR THE CIRCUIT BREAK ER BOX BEFORE INSTALLING THE FDTURE. ALL ELECTRICAL CONNECTmONS MUST BE IN ACCORDANCE WITH ELECTRICAL ANDIOCALELESTRICAL CODE

CAUTION

DISCONNECT POWER BEFORE CONNECTING TRIM TO HOUSING, FAIL TO Dō so MAY PERMANENTLY DAMAGE THE LED.

TOOLS REQUIRED:

- SAW
- MEASURING TAPE
- ELECTRICAL WIRING (USE AND GAUGE SUITABLE


FOR APPLICATION TO CONNECT THE FIXTURES.)

INSTRUCTIONS:

1. RISK OF ELECTRIC SHOCK -Turn off power before installation or removal.
2. Locate a suitable position to place the super thin LED fixture and open a hole in accordance to the cut-hole dimensions (refer to Hole Cut Table for appropriate Size).
3. Run the electrical wire from the switch (power supply), through the mounting hole,
4. Open the hardwire box swing cover and remove the appropriate knockouts.
5. Insert the electrical supply cable through the knockout.

6. Wire box using supplied quick connect push-in terminals.

- Connect green ground wire of cable to green Wire on box.
- Connect white wire of cable to white wire of box,
- Connect black wire of cable to black wire of box. (FIG. 1)

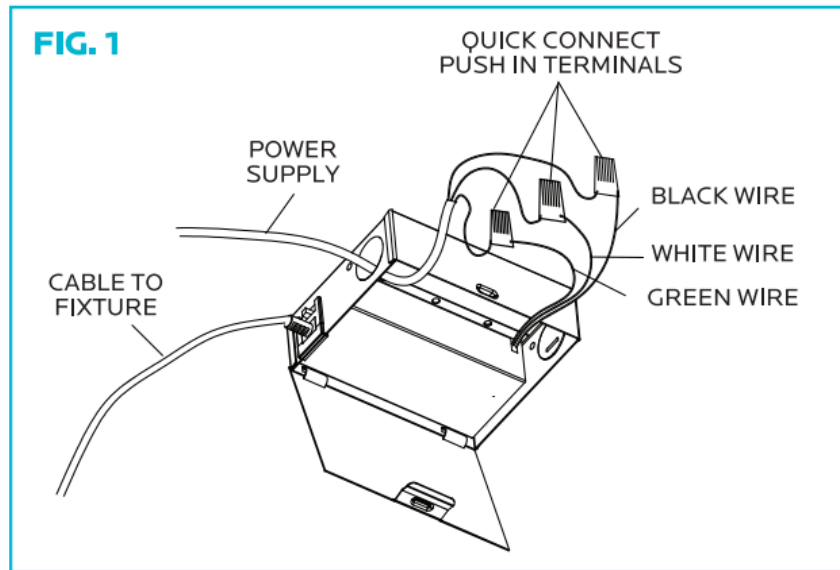

7. Place all wiring and connections back into the box and close the cover, Remodel applications: Insert the junction box into ceiling. (FIG. 2)

8. Push spring loaded clips on the fixture upwards and insert base into the mounting hole. Release the clips and fixture will be pulled flush to the ceiling. (FIG. 3)

FIG. 2

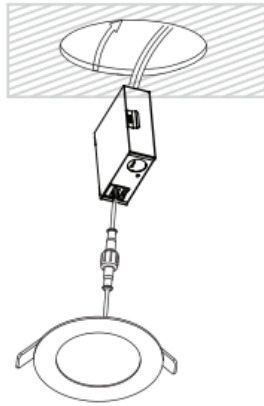


FIG. 3





FIG. 4

CCT SWITCH



Operating Temperature:

- -5°F – 105°F (-20°C – 40°C)
- Suitable for damp location
- Air-tight
- Type IC rated for direct contact with insulation.

9. Once assembly is complete, turn on power to confirm fixture is working properly.

WARNING

FOR WET LOCATION INSTALLTION, AFTER FIXTURE IS INSTALLED ON CEILING, PUT SILICONE GLUE TO SEAL THE GAP BETWEEN FIXTURE AND CEILING.

Operating Temperature:

- 5°F 105°F (-20°C- 40°C)
- Suitable for damp location
- Air-tight
- Type IC rated for direct contact with insulation.

www.allstarlighting.com

33 Randolph Ave. Avenel NJ 07001
732-882-1500

Documents / Resources



[LUXRITE LR23700 Series CCR Color Change Round Mini Panel](#) [pdf] Installation Guide
LR23700 Series CCR Color Change Round Mini Panel, LR23700 Series Panel, CCR Color Change Round Mini Panel, Mini Panel, Round Mini Panel, LR23741, LR23745, LR23748