

Item:

HT-G5WRAP-2FT-8253/277-230D

LED WRAPAROUND LIGHT



SAFETY INSTRUCTION

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.

NOTICE: Minimum 90°C supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location.

TOOLS REQUIRED



NOTE: Keep your receipt and these instructions for Proof of Purchase.



Ladder



Gloves



Phillips
Screwdriver



Wire
Stripper

PACKAGE CONTENT





C —



	PARTS	pcs
A	Mounting screws	4
B	Anchoring bolt	4
C	LED fixture	1

INSTALLATION INSTRUCTION

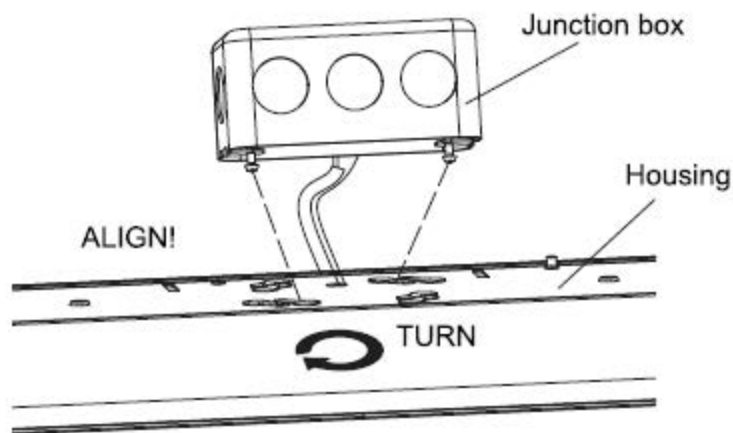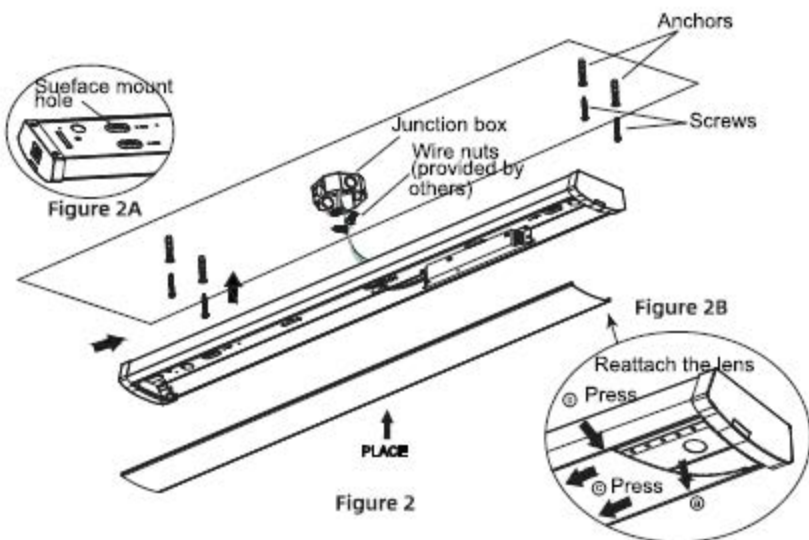

INSTALLATION INSTRUCTION

General Wiring Diagram

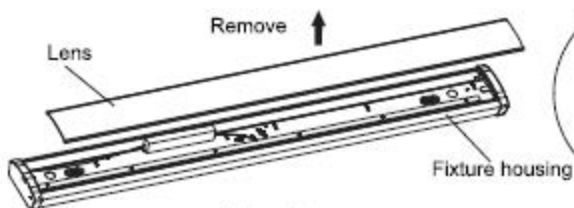
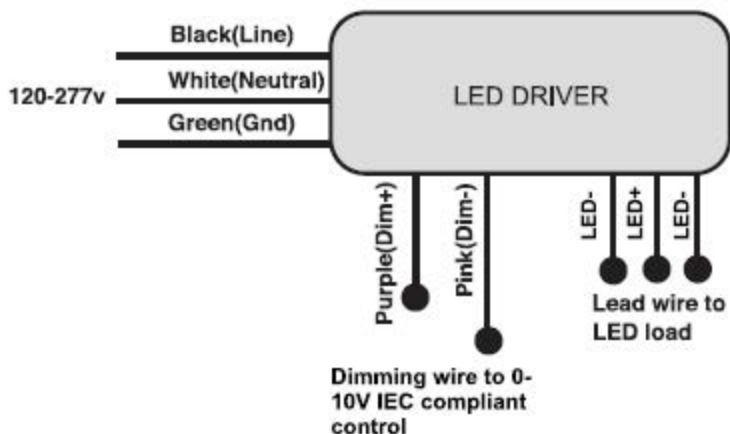


Figure 1




Figure 1A

INSTALLATION INSTRUCTION

SURFACE MOUNT TO CEILING

Notice: Always turn off the power supply from main circuit breaker first!

Step 1: Open the flip-top on end-cap,remove the lens directly.

Step 2: Place the luminaire on the junction box as a template, then mark the positions of 4 mounting holes in the ceiling.

Step 3: Put the luminaire aside and drill 4 mounting holes. Insert anchors into each hole.

Step 4: Make wiring in junction box(not included) refer to local Regulations and Codes.

Step 5: Tighten the screws one by one to hang the fixture firmly.

Step 6: Reinstall the lens.

a.Insert whole lens slot onto one side-edge of housing.

b. Carefully squeeze one end of the lens to engage opposite side-edge of the housing.

c. Continue this action down length of the lens until it fully installed onto housing.

Step 7: Turn on the luminaire.

SURFACE MOUNT TO JUNCTION BOX

Step 1: Open the flip-top on end-cap,remove the lens directly.(Fig.1A)

Step 2: Make wiring in junction box(not included) refer to local Regulations and Codes.


Step 3: Hang the fixture to the screws on the junction box. Then turn and align it to junction box, tighten the screws to hang fixture firmly.(Figure 3)

Step 4: Reinstall the lens.(Fig.2B)

Step 5: Turn on the luminaire.

INSTALLATION INSTRUCTION

Field-Adjustable Wattage & CCT

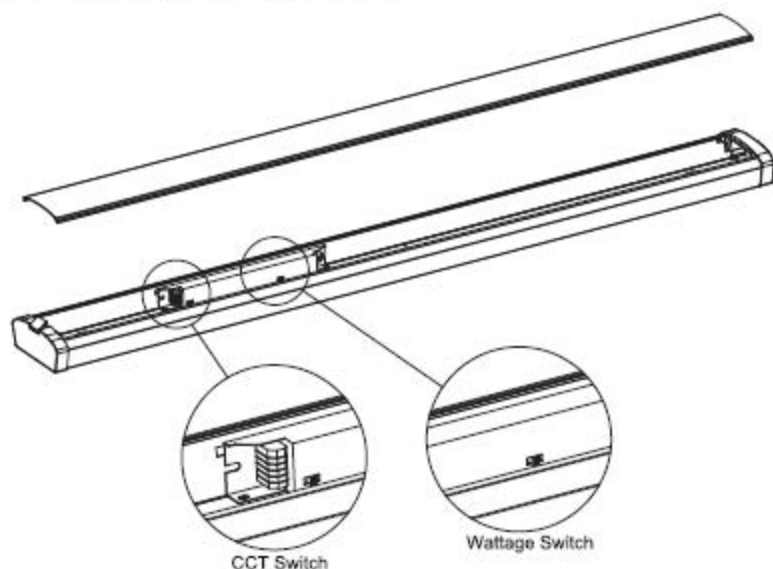

The end users may adjust the color temperature and lumen output respectively by the two DIP switches. CCT switch is accommodated with 5 CCT options (3000K, 3500K, 4000K, 5000K, 6500K), and power switch is accommodated with 4 power options. The switches can perform the desired color temperature and lumen output combination.

Factory Setting: 6500K, 25W

1. The DIP switch is located above the driver.
2. Select a wattage and color temperature by sliding switch left or right respectively to the desired value.

WARRANTY

This product is warranted for 5 years from the date of purchase. If this product does not perform to the specifications supplied on this package, send an email to us for product return and replacement. This replacement is the sole remedy available. Liability for incidental or consequential damage is expressly excluded.