


Specifications

	Flood light			Spotlight	Combo	Red Light/ SOS	Strobe
	Eco	Low	High				
☀ Output	15 LM	160 LM	1000-600 LM	600-300 LM	1500-700 LM	130 LM	600 LM
🕒 Runtime	120H	16H	5M+ 3H30M	3M+ 2H20M	3M+ 1H40M	5H/ 10H	2H30M
📏 Distance	700m (Max)						
🌐 Intensity	122500cd (Max)						
🔪 Impact Resistant	1m						
🌧 Waterproof	IPX8, underwater 2m						
💡 Light Source	Luminus SFT25 LED +COB Red & White LED						
⚡ Power	27W (max)						
🔋 Battery	1 X 26800 Li-ion, max length 81.5mm						
📏 Size	45*31.5*148mm						
⚖ Net Weight	About 338g (battery included)						

Notice: The above approximate data are lab-tested by using a 26800 Li-ion battery which may vary due to the difference between the environment and batteries. The runtime on High, Spot light, and combo are accumulated due to the over-heat protection settings.

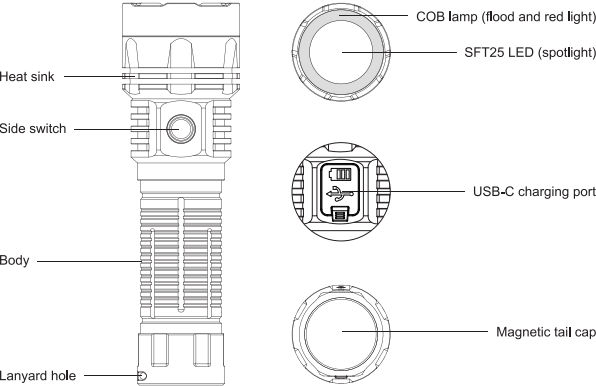

Operation Instruction

**1 ON/ OFF:** One click to turn on the memorized mode, and another click to turn the lamp off.

**2 Output change:** Press and hold the switch from ON then release the button to select the desired output level (flood light Low, High).

**3 Spot and flood light shifting:** Two clicks (spotlight- flood light High).

**4 Strobe:** Three clicks (spotlight only).

**5 Combo:** Four clicks (spotlight with flood light High)

**6 Red light:** Press and hold the switch from OFF to enter the red light, continue to press and hold the switch will circle the modes (red SOS-flood light Eco-red light constant on), and release the switch to select the desired mode.

**7 Switch Back-lit Light:** Continuously 7 clicks the switch from OFF will turn ON or OFF the back-lit light.

USB-C Charging/ Power Bank Function

- Built-in internal waterproof Type-C interface, supports QC3.0/PD3.0 fast charging and discharging.
- The blue charging indicator blinks under charging and turns constant on when it's fully charged. The peak charging current is 4A and it takes about 2.5 hours to fully charged the cell.
- When the lamp serves as a power bank, it supports a peak discharge power of 18W. The indicator is blue constant on, it will blinks when the voltage is low.

Low Power Reminder

When the battery voltage is low, the switch indicator will blink as a reminder. In this case, please replace or recharge the battery in time.

Multiple Protection

- Overcharge Protection:** Prevents overcharging to protect the battery from damage.
- Over-discharge Protection:** Prevents over-discharging to protect the battery from damage.
- Reverse Connection Protection:** Prevents damage to the flashlight and battery caused by incorrect battery installation or short-circuiting.
- Low Voltage Protection:** When the battery voltage drops, the flashlight will automatically reduce the brightness or cut off the output to enter protection mode.

Safety & Warnings

- No disassembly, heating above 100℃, or burning.
- Choking hazard, contains small parts, not for children, and keep away from children.
- This device is a super high-intensity flashlight. To avoid potential injury, it is forbidden to shoot directly to the eyes.
- Do not point the light directly at a person, animal, moving vehicle, or flammable materials.
- If a long time no use the lamp, please loose the threads and cut off the electricity, or take out the battery in case of damage from battery leakage.
- Take care well of the battery and charge it every three months to keep its performance.
- When carrying or storing the flashlight in a backpack etc, please set it to lock-out status or loose the threads to cut off the electricity to prevent accidental activations and the inconvenience caused.

Warranty


- 30 days of purchase: Free repair or replacement with manu-facturing defects.
- 5 years of purchase: Lumintop will repair the products free of charge within 5 years of purchase (products with built-in battery 2 years, charger, battery 1 year) if problems develop with normal use.
- Lifetime warranty: If repair is required after the guaranty period, we' ll charge for parts accordingly.
- This warranty does not cover normal wear and tear, improper maintenance, abuse, force majeure damage, or defaults by human factors.



EU	REP	EUBRIDGE ADVISORY GMBH Virginia Str. 2 35510 Butzbach,Germany 49-68196989045 eubridge@outlook.com
UK	REP	WSJ Product LTD Unit 1 Alsop Arcade L3 5TX brownlowhill Liverpool, Unied Kingdom info02@wsj-product.com +004407825478124

**Made in China**  
Implementation standards: GB/T35590-2017  
LUMINTOP TECHNOLOGY CO., LTD  
Address: 11th Floor, Block B , Fuchang Industrial Park,  
No.2 Chengxin Road, Longgang District, Shenzhen, China


Web: [www.lumintop.com](http://www.lumintop.com)  
Tel: +86-755-88838666  
E-mail: [service@lumintop.com](mailto:service@lumintop.com)

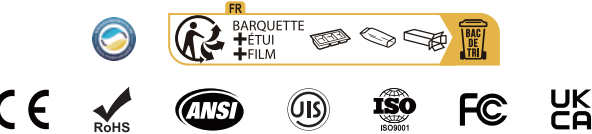

技术参数

	泛光			聚光	组合光	红光/SOS	爆闪
	节能	低亮	高亮				
亮度	15流明	160流明	1000-600流明	600-300流明	1500-700流明	130流明	600流明
续航	120小时	16小时	5分+3小时30分	3分+2小时20分	3分+1小时40分	5小时/10小时	2小时30分
照射距离	700米（Max）						
光强	122500cd（Max）						
防跌落高度	1米						
防水等级	IP68，水下2米						
灯珠	Luminus SFT25 LED + COB红白光						
功率	27W（最大）						
电池	1 X 26800锂离子电池，长度小于81.5毫米						
尺寸	45*31.5*148毫米（筒头直径*筒身直径*长）						
净重	约338克（含电池）						

注：以上近似参数值为使用1节26800锂离子电池在实验室测试所得，可能会随着使用电池及环境不同而有所不同。由于温控保护设置，高亮、聚光及组合泛光续航时间为累加值。

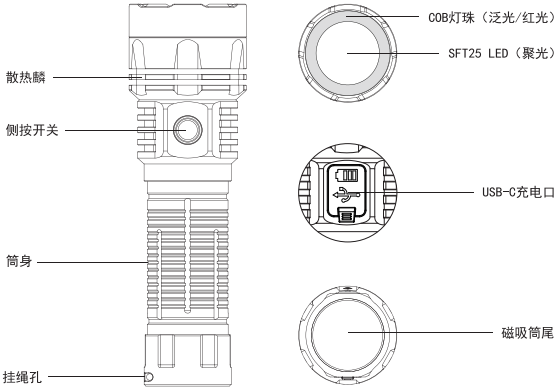

操作说明

- 1 开/关机：**单击开机进入泛光记忆档，再次单击关机
- 2 泛光换挡：**开机状态下长按开关循环换挡，松开开关选定亮度档位
- 3 聚泛光切换：**双击开关切换（聚光-泛光高亮）
- 4 聚光爆闪：**三击开关
- 5 组合光：**四击开关（泛光高亮+聚光）
- 6 红光：**关机状态下长按开关进入红光常亮，继续长按开关切换模式（红光SOS—泛光节能档—红光常亮），松开开关选定模式。
- 7 按键方位灯：**关机状态下七连按可开启或关闭。

USB-C充放电

- 内置Type-C接口，支持QC3.0/PD3.0快速充放电。
- 充电时蓝色指示灯闪烁，充满常亮，峰值充电电流4A，约2.5小时可充满。
- 当充电宝放电时蓝色指示灯常亮，电量不足时闪烁，支持峰值放电功率18W。

低压警示

当电池电量不足时，指示灯变为闪烁状态，此时应及时更换电池或给电池进行充电。

多重保护

- 防过充保护，防止过度充电损坏电池。
- 防过放保护，防止过度放电损坏电池。
- 防反接保护，防止电池反装短路损坏手电及电池。
- 低压保护，当电池电压降低时，手电筒会自动降低亮度或切断输出进入保护。

安全与警告！

- 1) 禁止拆卸、加热至100℃以上或燃烧。
- 2) 窒息警告，内含细小部件，不适合3岁以下儿童。请远离儿童。
- 3) 此手电光强度高，严禁直射双眼，以免对视力造成危害。
- 4) 请勿将手电直接指向人、动物、移动车辆或易燃物体。
- 5) 如长时间不使用请拧松螺纹断开电源，或将电池取出，避免电池漏液损坏手电。
- 6) 电池请按要求妥善保管，并每3个月给电池进行一次充电以保持最佳性能。
- 7) 在存储、运输（如装在口袋、背包等）时，请提前将手电设置为锁定状态或拧松螺纹断开电源，以防止误触发点亮带来不便。

保修条款

1. 30 天包换期：自产品售出之日起 30 天内，在正常使用情况下，出现产品质量问题，客户可选择换货或者维修服务。更换时，所换产品应为返修产品同型号同规格产品；如已停产的，则更换不低于原产品性能的同品牌产品。
2. 5年保修：自产品售出之日起5年内，用户在正常使用情况下，出现产品质量问题，则享受保修服务（内置不可拆卸电池的照明产品2年，充电器等配件1年）。
3. 终身有偿保修：超过产品免费保修期的，Lumintop将提供永久有偿保修，费用以实际更换材料为准，运费自理，不收取人工费用。
4. 以下情况不适用免费保修范围：因正常磨损而造成缺陷的；由于粗暴操作而造成缺陷的；不可抗力力造成损坏的；其他人为因素造成产品问题的。

中国制造  
执行标准：GB/T35590-2017  
生产地址：深圳市龙岗区宝龙工业区诚信路2号福昌产业园B栋11楼

深圳市雷明宇光电有限公司  
官网：www.lumintop.com  
电话：0755-88838666

