

IW693P

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Rev. 2.0 — 2 July 2025

Product data sheet

1 Product overview

The IW693P is a highly integrated Wi-Fi 6/6E device enabling concurrent dual Wi-Fi (CDW) and Bluetooth operation. IW693P supports four Wi-Fi modes:

- Mode 1: CDW 2x2 Wi-Fi 6/6E 5-7 GHz (802.11ax) + 1x1 Wi-Fi 6 2.4 GHz (802.11ax)
- Mode 2: CDW 1x1 Wi-Fi 6/6E 5-7 GHz (802.11ax) + 1x1 Wi-Fi 6 2.4 GHz (802.11ax)
- Mode 3: 2x2 Wi-Fi 6 2.4 GHz (802.11ax)
- Mode 4: 2x2 Wi-Fi 6/6E 5-7 GHz (802.11ax)

The System-on-chip (SoC) implements advanced features including MU-MIMO, OFDMA, target wake-up time (TWT), and Bluetooth LE Audio.

With integrated 2.4 GHz and 5-7 GHz TX power amplifiers (PA), RX low noise amplifiers (LNA) and TX/RX switches (T/R SW) as well as a Bluetooth radio, the IW693P simplifies design. External front-end module (FEM) with PA and LNA is also supported.

The IW693P supports a flexible front-end design with either two or three antennas.

The IW693P implements advanced real-time Wi-Fi and Bluetooth arbitration hardware with software algorithms to optimize coexistence performance.

NXP's Edgelock technology is integrated. The embedded Edgelock® secure subsystem (ELS) supports hardware crypto accelerated secure boot, key management, firmware encryption and authentication, secure life cycle management, and anti-rollback protection. IW693P is designed from the ground up to meet SESIP security.

The IW693P integrates dedicated CPUs and memories for both the Wi-Fi and Bluetooth subsystems for real time, independent protocol processing.

The interfaces to external host processors include PCIe for Wi-Fi and UART for Bluetooth.



2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Figure 1 shows IW693P application diagram for mode 1, internal PA, and three antennas.


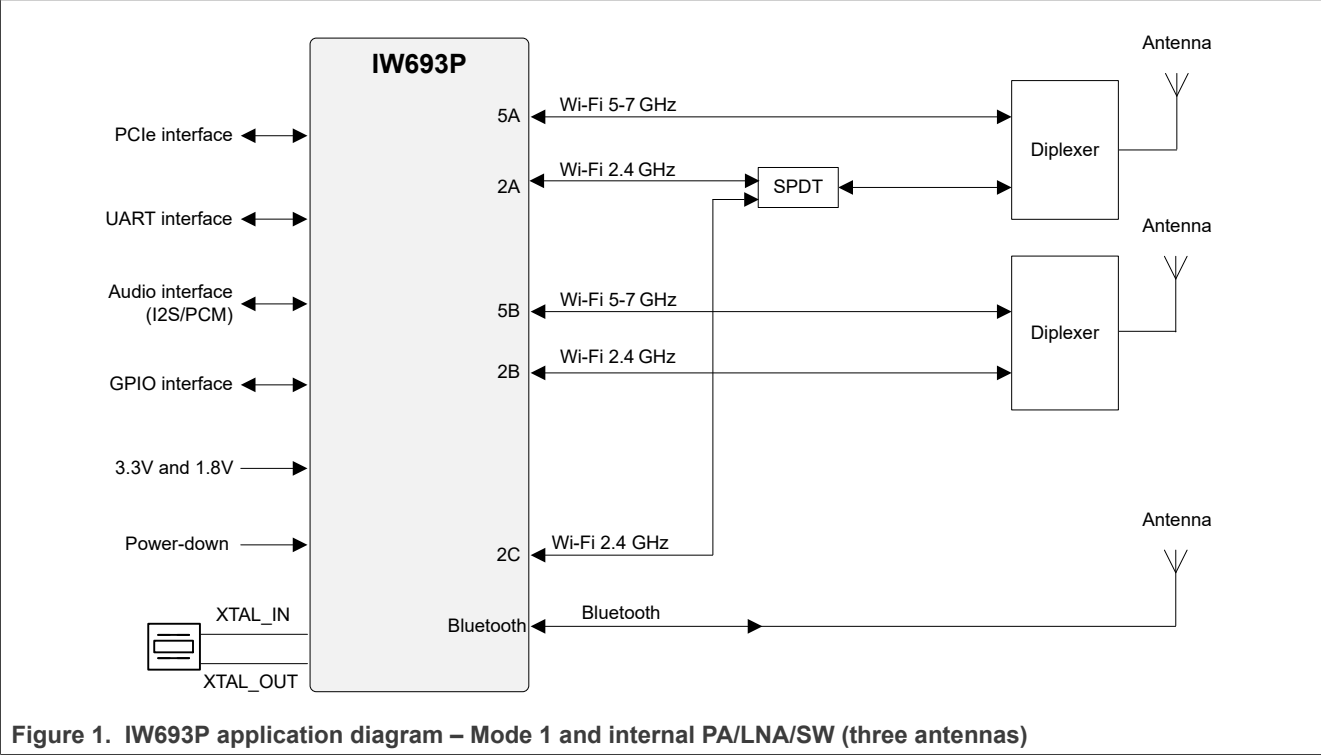


Figure 2 shows IW693P application diagram for mode 1, front-end modules (FEM), and three antennas.

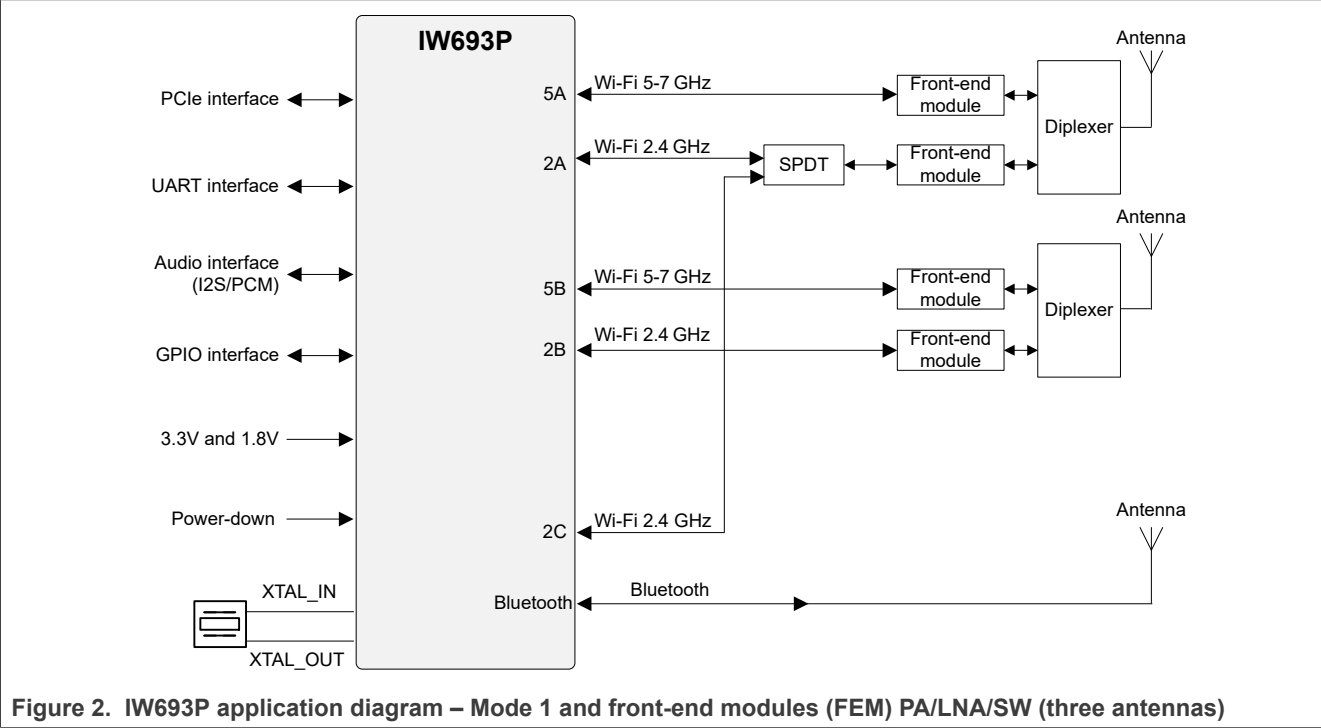


2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 1 provides details on the supported modes with three antennas.


Table 1. Supported modes - Three-antenna configuration

—		Wi-Fi 2.4 GHz						Wi-Fi 5-7 GHz						NB1
Name	Mode	Radio	Wi-Fi standard	Band width	RF path	Base band unit	MAC	Radio	Wi-Fi standard	Band width	RF path	Base band unit	MAC	Mode
2x2 + 1x1 CDW	1	1x1	802.11ax	20 MHz	2C	BBU2	MAC2	2x2	802.11ax	80 MHz	5A/5B	BBU1	MAC1	Bluetooth/Bluetooth LE
1x1 + 1x1 CDW	2	1x1	802.11ax	20 MHz	2C	BBU2	MAC2	1x1	802.11ax	80 MHz	5A	BBU1	MAC1	Bluetooth/Bluetooth LE
Single band	3	2x2	802.11ax	40 MHz	2A/2B	BBU1	MAC1	—	—	—	—	—	—	Bluetooth/Bluetooth LE
Single band	4	—	—	—	—	—	—	2x2	802.11ax	80 MHz	5A/5B	BBU1	MAC1	Bluetooth/Bluetooth LE

Figure 3 shows IW693P application diagram for mode 1, internal PA, and two antennas.

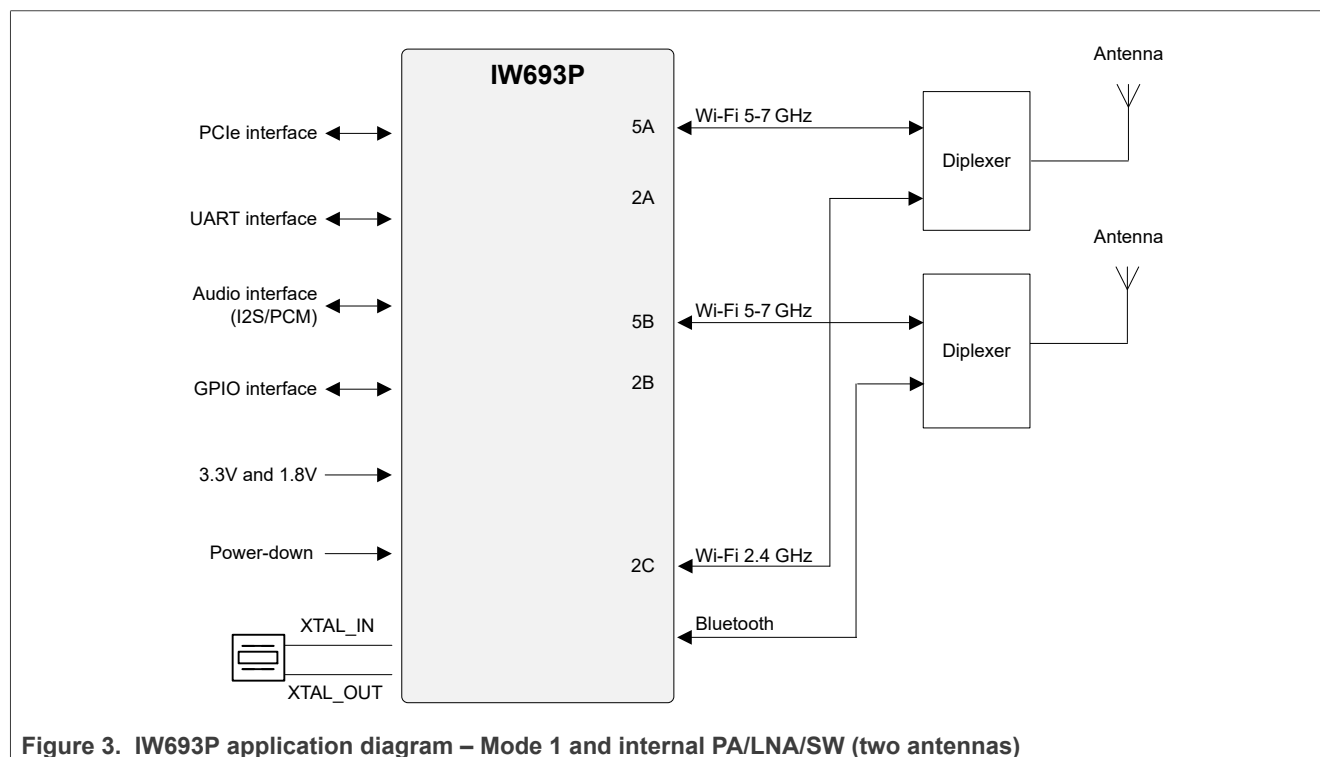

[Figure 4](#) shows IW693P application diagram for mode 1, front-end modules (FEM), and two antennas.

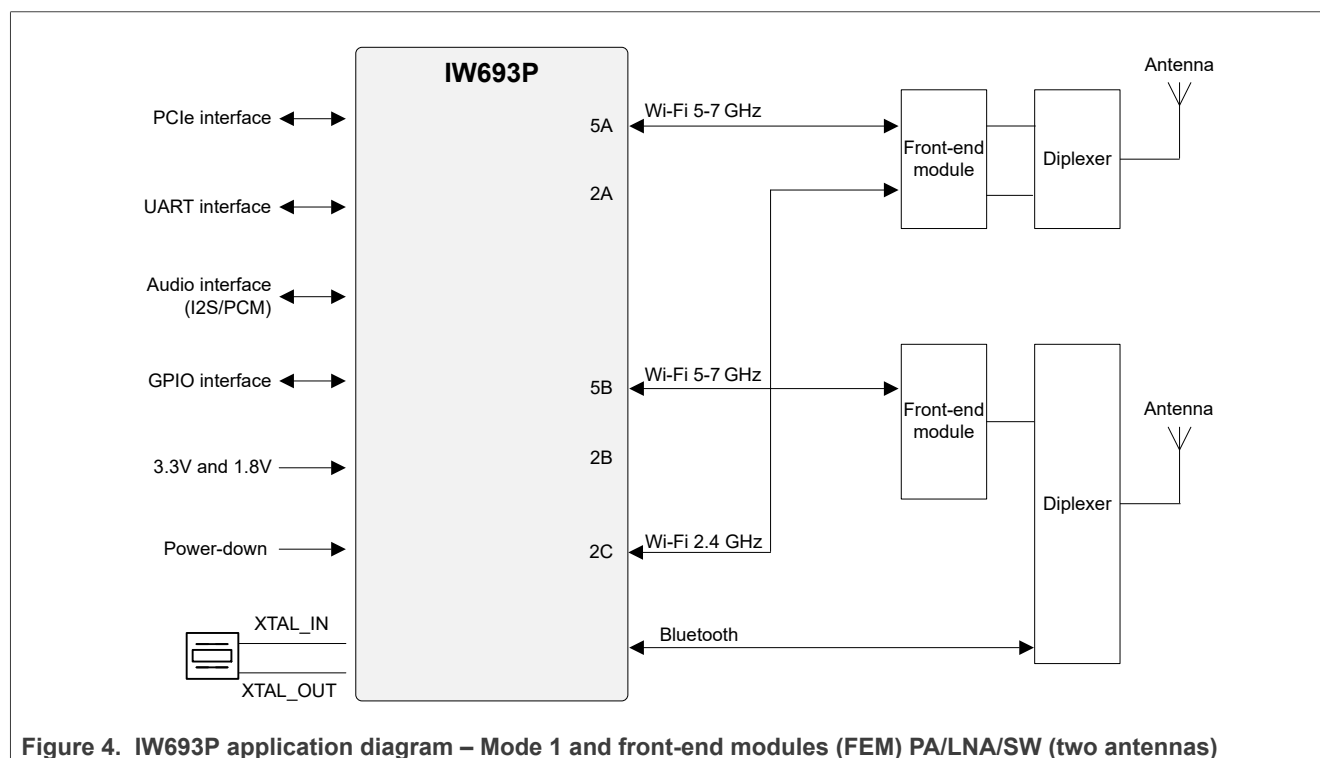

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 2 provides details on the supported modes with two antennas.

Table 2. Supported modes – Two-antenna configuration

—		Wi-Fi 2.4 GHz						Wi-Fi 5-7 GHz						NB1
Name	Mode	Radio	Wi-Fi standard	Band width	RF path	Base band unit	MAC	Radio	Wi-Fi standard	Band width	RF path	Base band unit	MAC	Mode
2x2 + 1x1 CDW	1	1x1	802.11ax	20 MHz	2C	BBU2	MAC2	2x2	802.11ax	80 MHz	5A/5B	BBU1	MAC1	Bluetooth/Bluetooth LE
1x1 + 1x1 CDW	2	1x1	802.11ax	20 MHz	2C	BBU2	MAC2	1x1	802.11ax	80 MHz	5A	BBU1	MAC1	Bluetooth/Bluetooth LE
Single band	3	—	—	—	—	—	—	2x2	802.11ax	80 MHz	5A/5B	BBU1	MAC1	Bluetooth/Bluetooth LE

1.1 Applications

- Wireless power over Ethernet (POE) hub
- Smart home hub
- Mobile router
- Internet of things (IoT) gateways

1.2 Wi-Fi key features

2x2 Wi-Fi 6/6E and 1x1 Wi-Fi 2.4 GHz concurrent dual wireless mode (mode 1)

2x2 radio (see [Table 1](#) and [Table 2](#))

- 40 MHz channel for 2.4 GHz (RF paths 2A and 2B)
- 1024 QAM (MCS11), up to 80 MHz channel for 5-7 GHz (RF paths 5A and 5B)

1x1 radio (see [Table 1](#) and [Table 2](#))

- 20 MHz channel for 2.4 GHz (RF path C)
- 1024 QAM (MCS11), up to 80 MHz channel for 5-7 GHz (RF path 5A)

2x2 and 1x1 radios

- STA and mobile AP
- Wireless multi stream (WMS)
- Wi-Fi TSF host clock sync between AP and STA
- Wi-Fi cross-chip TSF clock sync between AP and AP

1.3 Bluetooth key features

- Integrated PA (+13 dBm)/LNA/RF switch
- BDR/EDR packet types—1 Mbps (GFSK), 2 Mbps ($\pi/4$ -DQPSK), 3 Mbps (8DPSK)
- Bluetooth LE uncoded (1 Mbps/2 Mbps) and long range (125 kbps/500 kbps) support
- Bluetooth LE advertising extensions for improved capacity
- Isochronous channels (ISOC) supporting LE Audio

1.4 Host interfaces

Wi-Fi and Bluetooth interface options

Table 3. Host interface options

Wi-Fi	Bluetooth
PCIe	UART

1.5 Operating characteristics

- Supply voltage: 1.8 V and 3.3 V
- Operating temperature: –40°C to 85°C
- Storage temperature: –55°C to 125°C

1.6 General features

Package options

- HVQFN148 (dual-row) 11 mm x 11 mm x 0.85 mm with 0.5 mm pitch

Coexistence

- Internal coexistence between Wi-Fi and Bluetooth
- External coexistence interface for connection to external radios such as UWB and cellular modems

Power management

- Individual low-power down for Wi-Fi and Bluetooth subsystems
- Low-power standby
- Integrated high-efficiency buck DC-DC converter
- Wake-up through GPIO, host interface, and RTC

Memory


- One Time Programmable (OTP) memory to store the MAC address and calibration data
- Addressable memory space is accessible to all CPUs

Security

- Secure boot and debug management
- Firmware authentication
- Lifecycle management
- Anti-rollback protection
- Hardware cryptography for boot acceleration
- Secure key generation and management for boot management
- Authenticated, integrity-verified and encrypted firmware
- Voltage glitch attack resistance
- Targeting SESIP security certification

1.7 Internal block diagram

Figure 5 shows IW693P internal block diagram.

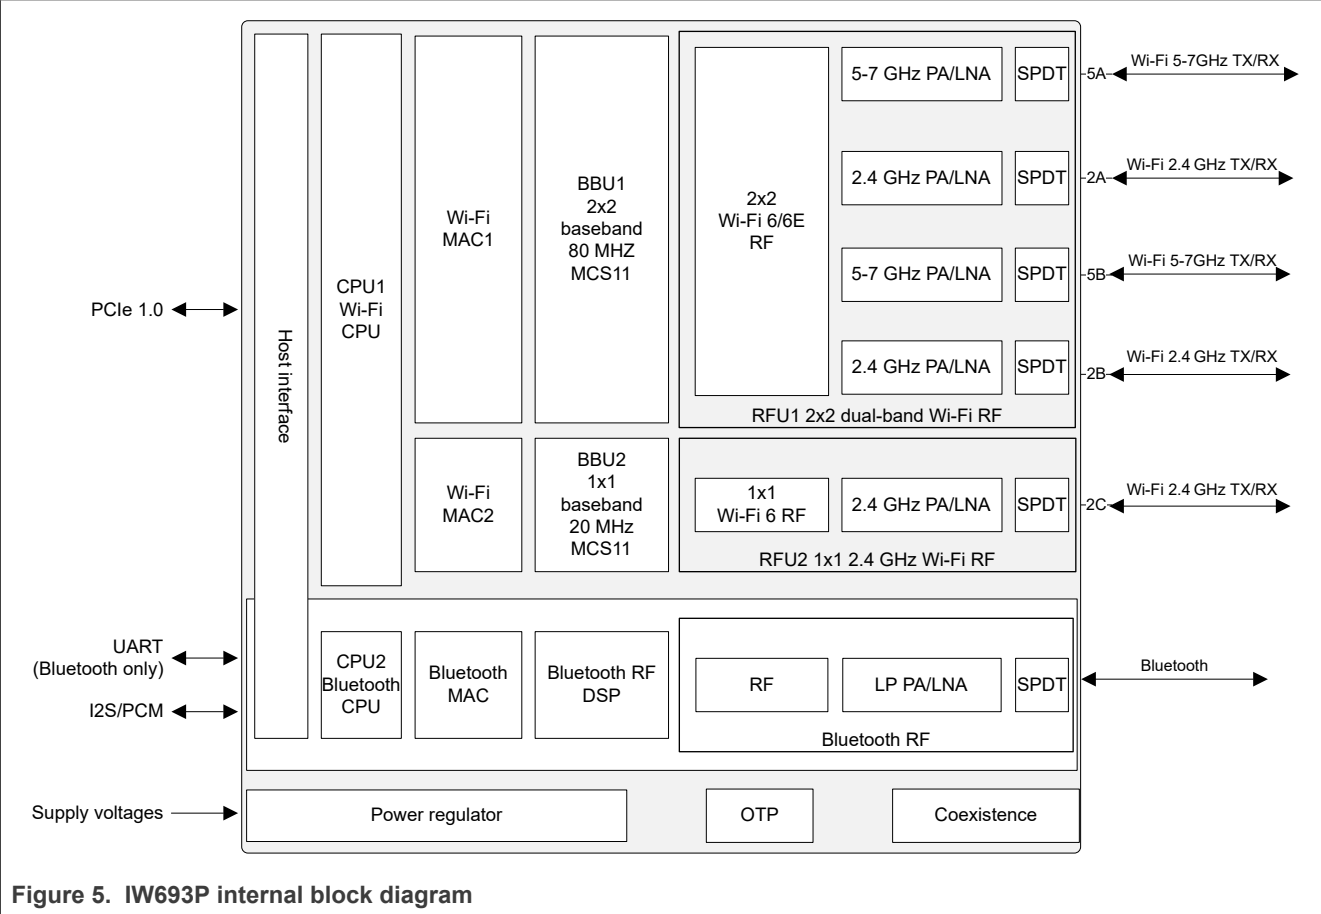

2 Ordering information

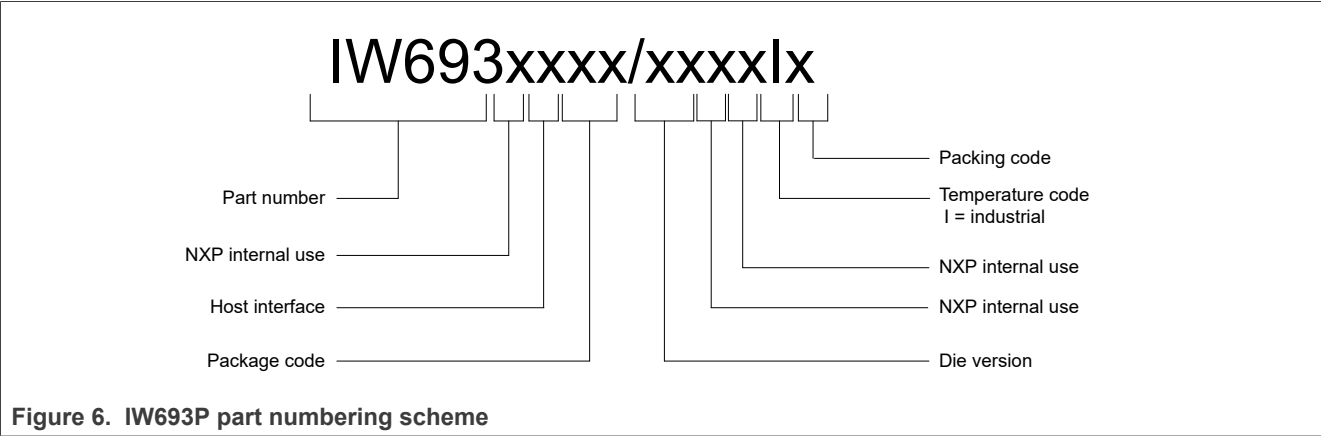


Table 4. Part order codes

Part order code	Package type	Operating temperature range	Packing
IW693SPHN/A1ZDIK	HVQFN148 (dual-row) 11 mm x 11 mm x 0.85 mm with 0.5 mm pitch	–40°C to 85°C	Tray
IW693SPHN/A1ZDIMP	HVQFN148 (dual-row) 11 mm x 11 mm x 0.85 mm with 0.5 mm pitch	–40°C to 85°C	Tape and reel

3 Wi-Fi subsystem

3.1 IEEE 802.11 standards

- 802.11ax
 - 2x2 SU and MU-MIMO/OFDMA (MU-MIMO/OFDMA for STA mode only)
 - Target wake time (TWT)
- 802.11ac
 - Wave 1/2 backward compatible
 - Downlink MU-MIMO for STA mode only
- 802.11n/a/g/b backward compatible
- 802.11az accurate ranging
- 802.11d operation in additional regulatory domains
- 802.11e quality of service
- 802.11h
 - Transmit power control
 - DFS radar pulse detection
- 802.11i enhanced security
- 802.11k radio resource measurement
- 802.11mc fine time measurement (FTM)
- 802.11r fast hand-off for AP roaming
- 802.11u Hotspot 2.0 (STA mode only)
- 802.11v TIM frame transmission/reception
- 802.11w protected management frames
- 802.11z tunneled direct link setup
- Fully supports clients (stations) implementing IEEE Power Save mode

3.2 Wi-Fi MAC

- 802.11ax 2x2 MU-MIMO MAC
- Trigger Frame Formats
 - Basic trigger frame
 - Beamforming Report Poll (BFRP)
 - MU-BAR, MU-RTS, BSR Poll (BSRP) trigger variant
 - Trigger frame MAC padding
- Wireless Multi-Stream
- HE Variants of HT Control
 - Basic format
 - UL Power Headroom
 - Receive Operation Mode control sub field
- HE MU Frame Exchange Sequences
- MU Acknowledgment (ACK)
- M-BA and C-BA Variants in BA Frames
- MU-RTS/CTS Procedures
- Target Wake Time Scheduling
- HE Dual-NAV
- UL Carrier Sensing
- Buffer Status Reports
- Operating Mode Indication (OMI)
- Multiple BSS/Station
- A-MPDU Rx (de-aggregation) and TX (aggregation) (supports single-MPDU A-MPDU)
- Management information base counters
- Transmit rate adaptation
- Transmit power control
- Mobile hotspot

3.3 Wi-Fi baseband

BBU1 - 2x2 baseband

- 802.11ax 2x2 MU-MIMO baseband, backward compatible with 802.11ac/n/a/g/b technology
- 6 GHz PHY data rates up to 1.2 Gbit/s
- 5 GHz PHY data rates up to 1.2 Gbit/s
- 2.4 GHz PHY data rates up to 573.5 Mbps
- Bandwidth support
 - 20 MHz
 - 40 MHz
 - 80 MHz
- Modulation and coding schemes (MCS)
 - 802.11ax—MCS 0~11
 - Up to 2 spatial streams for 20, 40, 80 MHz
 - 802.11ac—MCS 0~9 Nsts = 1 and 2
 - Up to 2 spatial streams for 20, 40, 80 MHz
 - 802.11n—MCS 0~15 and MCS 32 (duplicate 6 Mbps)
 - Dual sub-carrier modulation (DCM)
 - MCS 0 only
 - BCC and LDPC coding
- Frame formats
 - 802.11ax HE_SU (Tx/Rx)
 - 802.11ax HE_MU (Rx)
 - 802.11ax HE_ER_SU (Tx/Rx)
 - 802.11ax HE_TB (Tx)
 - 802.11ac VHT
 - 802.11n HT
 - 802.11a (including dup/quad modes)
 - 802.11g (including dup mode)
 - 802.11b
- Channel state information (CSI)
- Optional 802.11ac and 802.11n MIMO features:
 - LDPC transmission and reception for both 802.11ac and 802.11n
 - 256 QAM (MCS 8, 9) modulation (optional support for 802.11ac MCS 9 in 20 MHz using LDPC)
 - Spectral intelligence
 - Spectrum monitoring
 - DFS assist to reduce false detections

BBU2 - 1x1 baseband

- 802.11ax 1x1 baseband, backward compatible with 802.11ac/n/a/g/b technology
- Bandwidth support
 - 20 MHz
- Modulation and coding schemes (MCS)
 - 802.11ax—MCS0~11
 - 802.11ac—MCS0~8
 - 802.11n—MCS0~7
 - Dual sub-carrier modulation (DCM)
 - MCS0 only
 - BCC coding
- Frame formats
 - 802.11ax HE_SU (Tx/Rx)
 - 802.11ax HE_MU (Rx)
 - 802.11ax HE_ER_SU (Tx/Rx)
 - 802.11ax HE_TB (Tx)
 - 802.11ac VHT
 - 802.11n HT
 - 802.11a
 - 802.11g
 - 802.11b
 - Channel state information (CSI)
- Optional 802.11ac and 802.11n MIMO features:
 - LDPC transmission and reception for both 802.11ac and 802.11n
 - 256 QAM (MCS 8) modulation

BBU1 and BBU2 additional features

- Uplink MU-MIMO (STA mode only)
- Packet extension
 - Up to 8 us for highest rates
 - 0 us for all other modes
- Range extension
- Beam change
- Guard interval (GI) modes
 - 1x HE-LTF with 0.8 us GI
 - 1x HE-LTF with 1.6 us GI (for UL TB PPDU)
 - 2x HE-LTF with 0.8 us GI
 - 2x HE-LTF with 1.6 us GI
 - 4x HE-LTF with 3.2 us GI
 - 4x HE-LTF with 0.8 us GI
- Optional 802.11ac and 802.11n MIMO features:
 - 20/40/80 MHz coexistence with middle-packet detection (GI detection) for enhanced CCA
 - Short guard interval (0.4 us)
 - RIFS on receive path for 802.11n packets
 - VHT MU-PPDU (receive)
- Precise indoor location positioning (802.11mc)
- Power save features

3.4 Wi-Fi radio

RFU1 – 2x2 dual-band Wi-Fi RF

- 802.11ax 2x2 MU-MIMO on-chip RF radio

RFU2 – 1x1 2.4 GHz Wi-Fi RF

- 2.4 GHz Wi-Fi band operation
- 802.11ax 1x1 on-chip RF radio

RFU1 and RFU2 additional features

- Integrated PA
- On-chip LNAs with optimized noise figure and power consumption
- High dynamic range Rx AGC
- Optimized TX gain distribution for linearity and noise performance

3.5 Wi-Fi encryption

- Data Frame Encryption/Decryption
 - AES/CCMP
 - AES/GCMP
 - WAPI
- Management Frame Encryption/Decryption for broadcast/multicast packets
 - AES/CMAC
- Management Frame Encryption/Decryption for unicast packets
 - AES/CCMP
 - AES/GCMP

3.6 Transmit Beamforming (TxBF)

- 802.11ax/ac/n explicit beamformer
 - NDP sounding to stations capable of explicit beamformee
 - Beamforming up to two streams
- 802.11ax/ac/n explicit beamformee
 - Supports sounding feedback for up to 8x8 beamformer (BBU1 only)

3.7 RF channels

The list of channels for Wi-Fi is available in [Section 14.1](#).

3.8 Wi-Fi host interfaces

- PCI Express 1.0 interface (Gen 1, single lane)
Note: The PCIe host must allocate memory for DMA buffer within the physical address of up to 512 GB (less than 0x80_0000_0000) for IW693P.

4 Bluetooth subsystem

4.1 Bluetooth features

- Bluetooth 5.4 certified
- Bluetooth Class 2
- Bluetooth Class 1
- Single-ended, shared Tx/Rx path for Bluetooth
- PCM and I2S interfaces for voice applications
- Baseband/radio BDR/EDR packet types—1 Mbps (GFSK), 2 Mbps ($\pi/4$ -DQPSK), 3 Mbps (8DPSK)
- Fully functional Bluetooth baseband—AFH, forward error correction, header error control, access code correlation, CRC, encryption bit stream generation, and whitening
- Adaptive Frequency Hopping (AFH) using Packet Error Rate (PER)
- Interlaced scan for faster connection setup
- Simultaneous active ACL connection support
- Automatic ACL packet type selection
- Full central and peripheral piconet support¹
- Scatternet support
- Standard UART HCI transport layer
- SCO/eSCO links with hardware accelerated audio signal processing and hardware supported PPEC algorithm for speech quality improvement
- All standard pairing, authentication, link key, and encryption operations
- Standard Bluetooth power saving mechanisms (sniff modes, and sniff sub-rating)
- Enhanced Power Control (EPC)
- Channel Quality Driven Data Rate (CQDDR)
- Wideband Speech (WBS) support (two WBS links)²
- Encryption (AES) support
- HCI Encryption Key Size Control

¹ The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

² Two WBS over PCM where the device under test (DUT) must be central.

4.2 Bluetooth Low Energy (LE) features

- Bluetooth LE 5.4 certified
- Supports up to 16 simultaneous central/peripheral connections³
- Wi-Fi/Bluetooth coexistence protocol support
- Shared RF with BDR/EDR
- Encryption (AES) support
- Intelligent Adaptive Frequency Hopping (AFH)
- Bluetooth LE Privacy
- Bluetooth LE Secure Connection
- Bluetooth LE Data Length Extension
- Bluetooth LE Advertising Extension
- Bluetooth LE Long Range
- Bluetooth LE 2 Mbps
- Bluetooth LE Power Control (LEPC)
- Bluetooth LE Isochronous Channels (ISOC)⁴
- Bluetooth LE Connection Subrating⁵
- Bluetooth LE Channel Classification Enhancement⁵
- Periodic Advertising ADI support⁵

4.3 Bluetooth host interfaces

- High-Speed UART interface

³ The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

⁴ Bluetooth LE audio supported with external host running Low Complexity Communication Codec (LC3) through HCI interface.

⁵ Check the feature support in the software release notes.

4.4 Digital audio interfaces

4.4.1 I2S interface


- I2S (Inter-IC Sound) interface for audio data connection to Analog-to-Digital Converters (ADC) and Digital-to-Analog Converters (DAC)
- Central and peripheral mode for I2S, MSB, LSB audio interfaces (single Bluetooth)⁶
- Tri-state I2S interface compatibility
- I2S pins shared with PCM pins
- I2S narrow band speech (NBS) with 8 kHz sampling rate
- I2S wide band speech (WBS) with 16 kHz sampling rate

4.4.1.1 I2S interface signals

Refer to [Section 6.5.8 "Digital audio interface"](#).

4.4.1.2 I2S interface protocol


[Figure 7](#) shows I2S interface protocol.

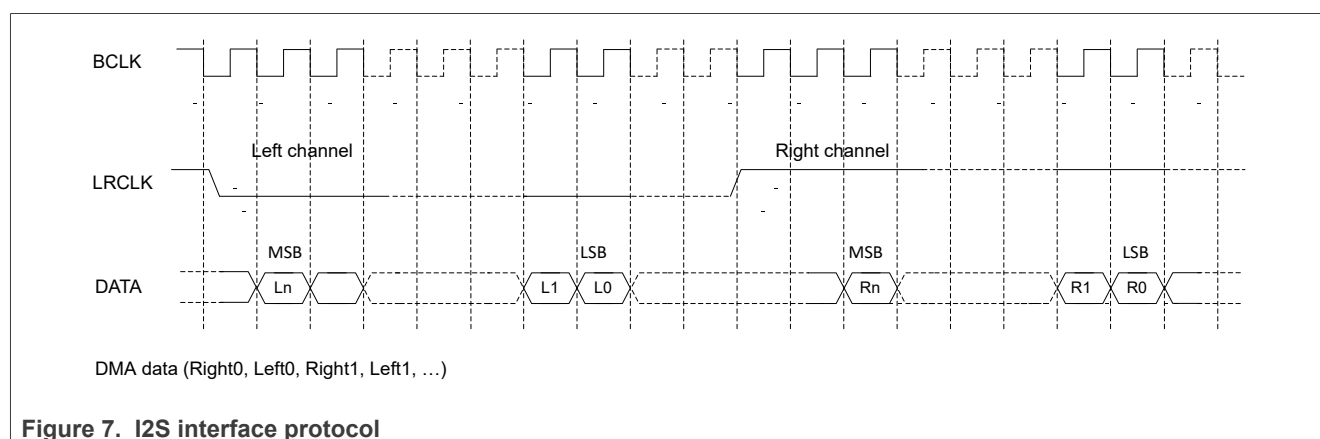


⁶ The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

IW693P supports mono and dual channel modes.
In mono-channel mode, by default the left channel is used for data.

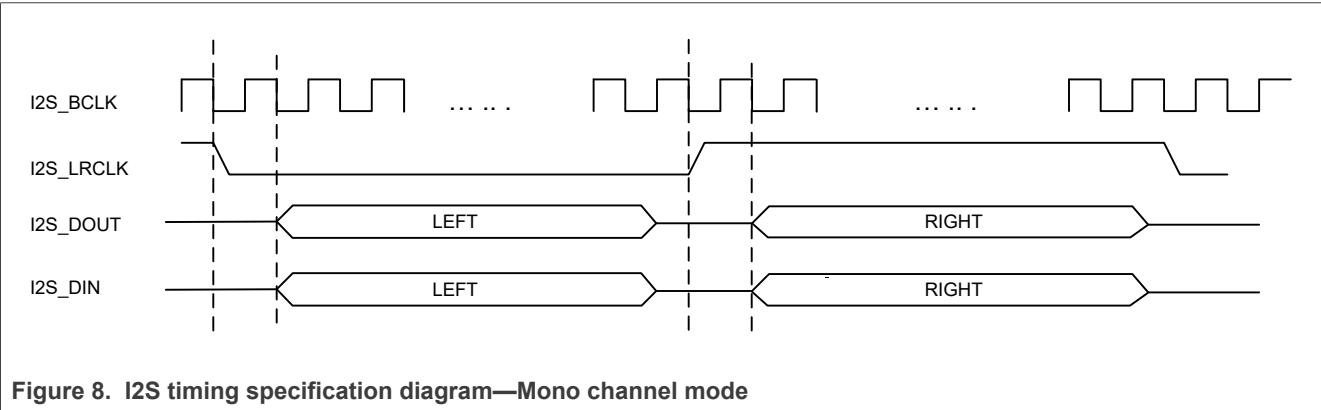

In dual-channel mode, the two channels are supported on two time slots.

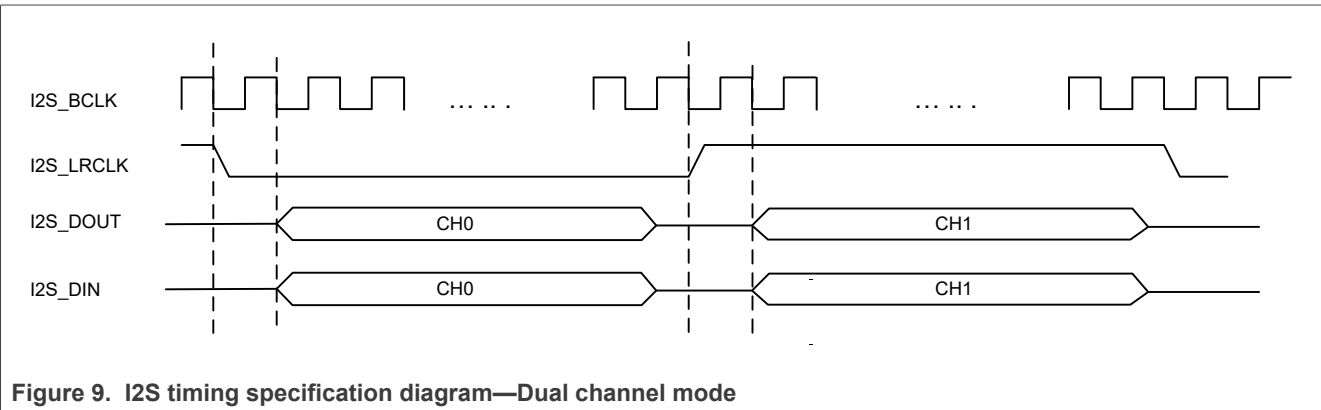

4.4.1.3 Clock frequency and audio data resolutions

Audio data may arrive with different input data formats with different sampling rates.

In central mode, the I2S interface uses an audio input clock of 4.096 MHz or 2.048 MHz to provide the appropriate M clock (MCLK) and bit clock (I2S_BCLK) frequency to match the sampling rates of each audio data format. The sampling rates can be 8 kHz to 16 kHz.⁷

In peripheral mode, the I2S interface does not provide the bit clock (I2S_BCLK) but it can provide the M clock (MCLK).⁷

⁷ The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

4.4.2 PCM interface

- Central or peripheral mode⁸
- PCM bit width size of 16 bits
- Up to 4 slots with configurable bit width and start positions
- Tri-state PCM interface capability
- PCM short frame synchronization
- PCM pins shared with I2S
- PCM narrow band speech (NBS) with 8 kHz sampling rate
- PCM wide band speech (WBS) with 16 kHz sampling rate⁹
- Dual Hands free profile (HFP) (WBS/NBS) PCM

4.4.2.1 PCM interface signal description

Refer to [Section 6.5.8 "Digital audio interface"](#).

4.4.2.2 PCM protocol

The PCM interface supports short frame sync.[Figure 10](#) shows an example of a PCM interface with four signals.

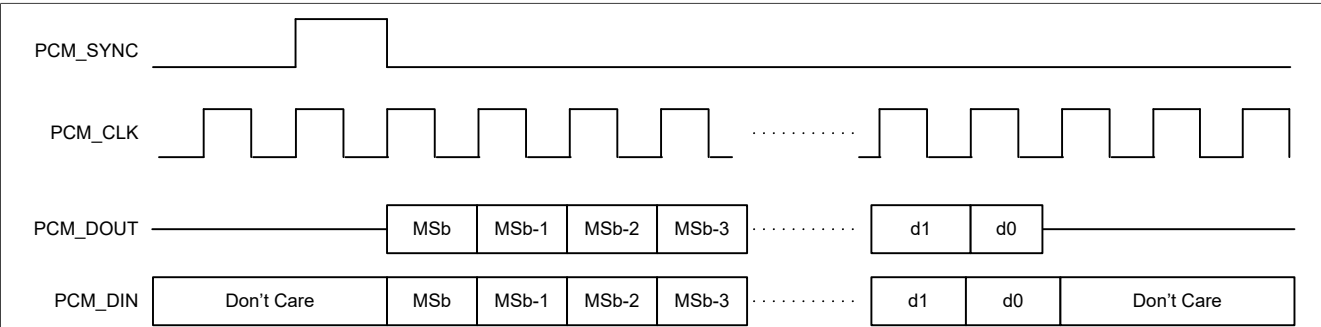


Figure 10. PCM short frame sync

8 The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

9 Two WBS over PCM where the device under test (DUT) must be Bluetooth piconet central

IW693P

All information provided in this document is subject to legal disclaimers.

© 2025 NXP B.V. All rights reserved.

Product data sheet

Rev. 2.0 — 2 July 2025


Document feedback

21 / 131


IW693P supports mono and dual channel modes.

Note: [Figure 11](#) and [Figure 12](#) illustrate PCM mono and dual channel modes in short frame sync.

In mono-channel mode, by default the left channel is used for data.

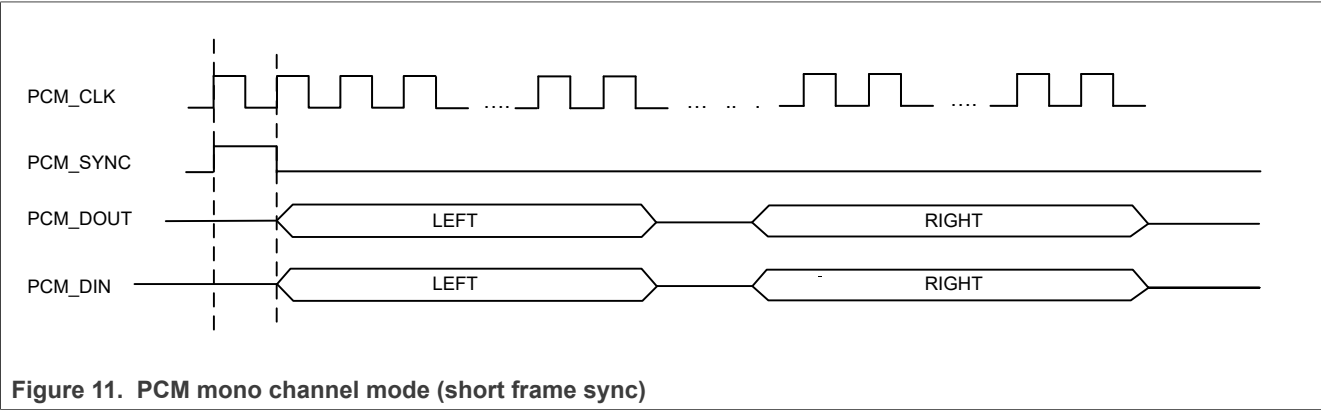

In dual-channel mode, the two channels are supported on two time slots.

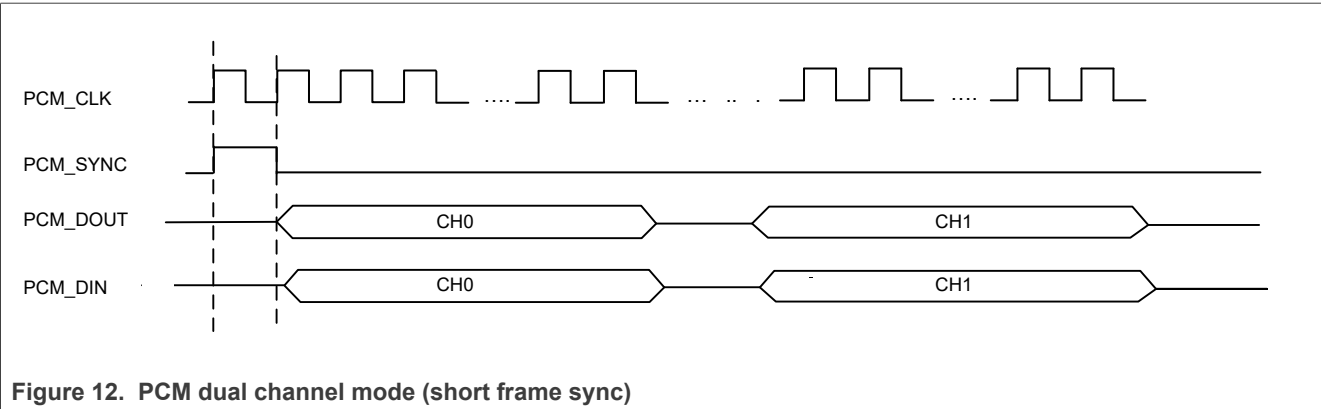

4.4.2.3 PCM modes of operation

The PCM interface supports two modes of operation:

- PCM central¹⁰
- PCM peripheral¹⁰

When in PCM central mode, the interface generates a 2 MHz or a 2.048 MHz PCM_CLK and 8 kHz PCM_SYNC signal. An alternative PCM central mode is available that uses an externally generated PCM_CLK, but still generates the 8 kHz PCM_SYNC. The external PCM_CLK must have a frequency that is an integer multiple of 8 kHz. Supported frequencies are in the 512 kHz to 4 MHz range.¹⁰

When in PCM peripheral mode, the interface has both PCM_CLK and PCM_SYNC as inputs, thereby letting another unit on the PCM bus generate the signals.¹⁰

The PCM interface consists of up to four PCM slots (time divided) preceded by a PCM sync signal. Each PCM slot can be either 8 bit or 16 bit wide. The slots can be separated in time, but are not required to follow immediately after one other. The timing is relative to PCM_CLK. [Figure 13](#) shows an example of a PCM burst with two slots.

The burst starts with a PCM_SYNC and then follows the PCM burst. In this example, the PCM burst consists of two PCM slots (the first slot is 8 bit wide, the second slot is 16 bit wide) separated with two PCM_CLK clock cycles. The PCM slots can be configured to start at an arbitrary point in time, and the start value is given relative to the start of the PCM_SYNC. The timing of the four PCM slots must be such that slot 0 is always located before slot 1, slot 1 before slot 2, etc. It is possible to only use for example slot 1 and not slot 0.

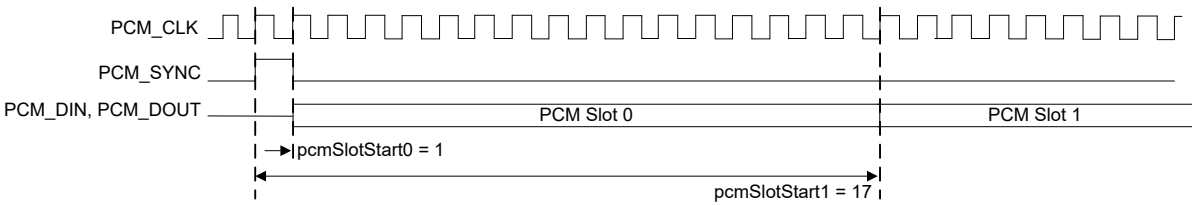


Figure 13. PCM burst with two PCM slots - PCM short frame sync

¹⁰ The master/slave replacement in this document follows the recommendation of Bluetooth SIG.

5 Coexistence

5.1 Antenna configurations

The IW693P supports two-antenna and three-antenna configurations.

5.1.1 Two-antenna configuration

The two separate antennas allow simultaneous independent operation of the Wi-Fi and Bluetooth radios, depending upon the antenna isolation.

5.1.2 Three-antenna configuration

The three separate antennas allow simultaneous independent operation of the Wi-Fi and Bluetooth radios, depending upon the antenna isolation.

5.2 Central hardware packet traffic arbiter

The central hardware packet traffic arbiter arbitrates the transmit and/or receive operations between the on-chip Wi-Fi and Bluetooth radios as per the supported hardware configuration. See [Section 5.1](#).

The central hardware packet traffic arbiter has the following features:

- Supports simultaneous Wi-Fi and Bluetooth transmissions to optimize output transmit power levels and performance
- Supports simultaneous receive for all on-chip radios

In addition to the on-chip radios, the central hardware packet traffic arbiter arbitrates up to three external radios. Refer to [Section 5.3](#).

5.3 Coexistence with external radios


The available interfaces for external coexistence are PTA, WCI-2, coex-UART, and debug-UART.

Note: The external coexistence interfaces share the same multi-function pins (MFP). Refer to [Section 6.5.2](#) for more details.

WCI-2 external coexistence interface

WCI-2 is the two-wire wireless coexistence interface 2 protocol defined in the Bluetooth Core Specification (Vol 7 Part C).

[Figure 14](#) illustrates the hardware coexistence interface between the central hardware packet traffic arbiter and the external radio. In the figure, Wireless SoC is IW693P.

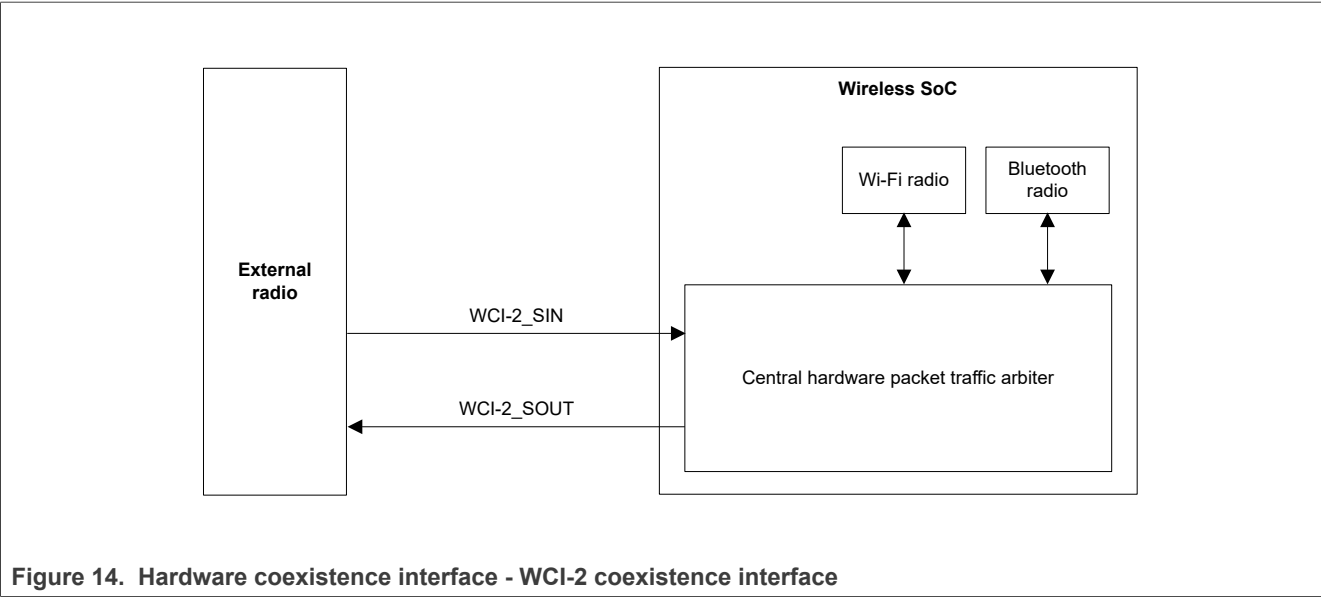

Note: Refer to [Section 6.5.10](#) for the description of WCI-2 coexistence interface signals.

PTA external coexistence interface

Figure 15 illustrates the hardware coexistence interface between the central hardware packet traffic arbiter and the external radio. In the figure, Wireless SoC is IW693P.


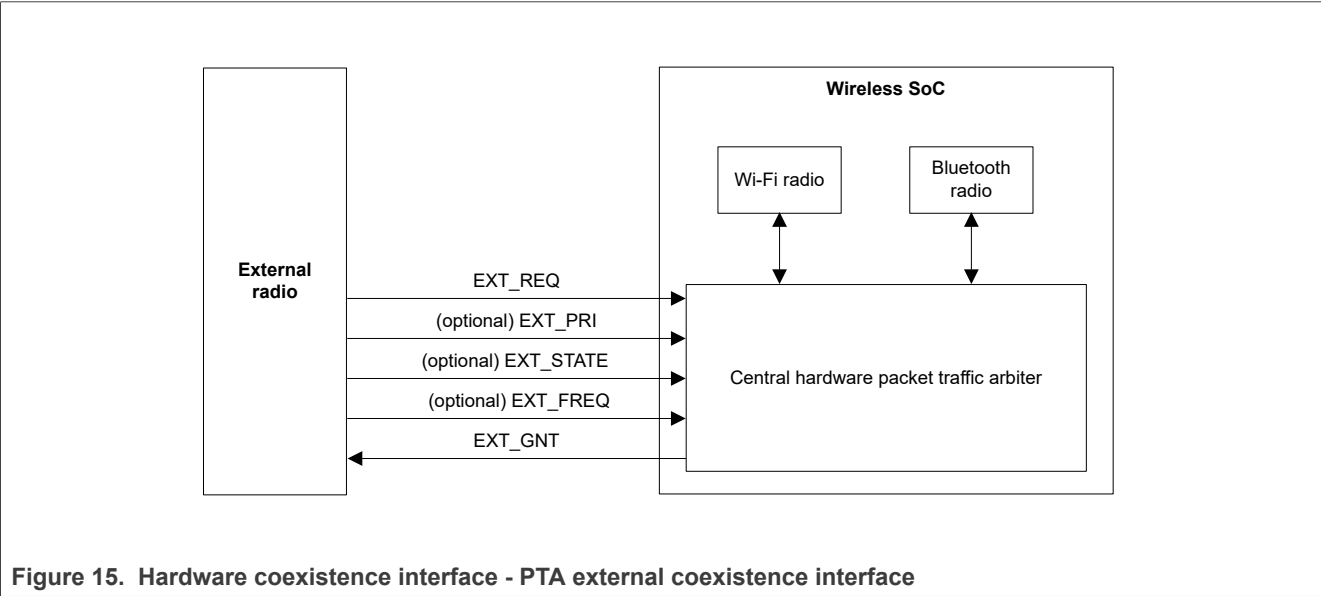


Figure 15. Hardware coexistence interface - PTA external coexistence interface

Note: Refer to [Section 6.5.9](#) for the description of PTA external coexistence interface signals.

Coex-UART external coexistence interface

Figure 16 illustrates the hardware coexistence interface between the central hardware packet traffic arbiter and the external radio. In the figure, Wireless SoC is IW693P.

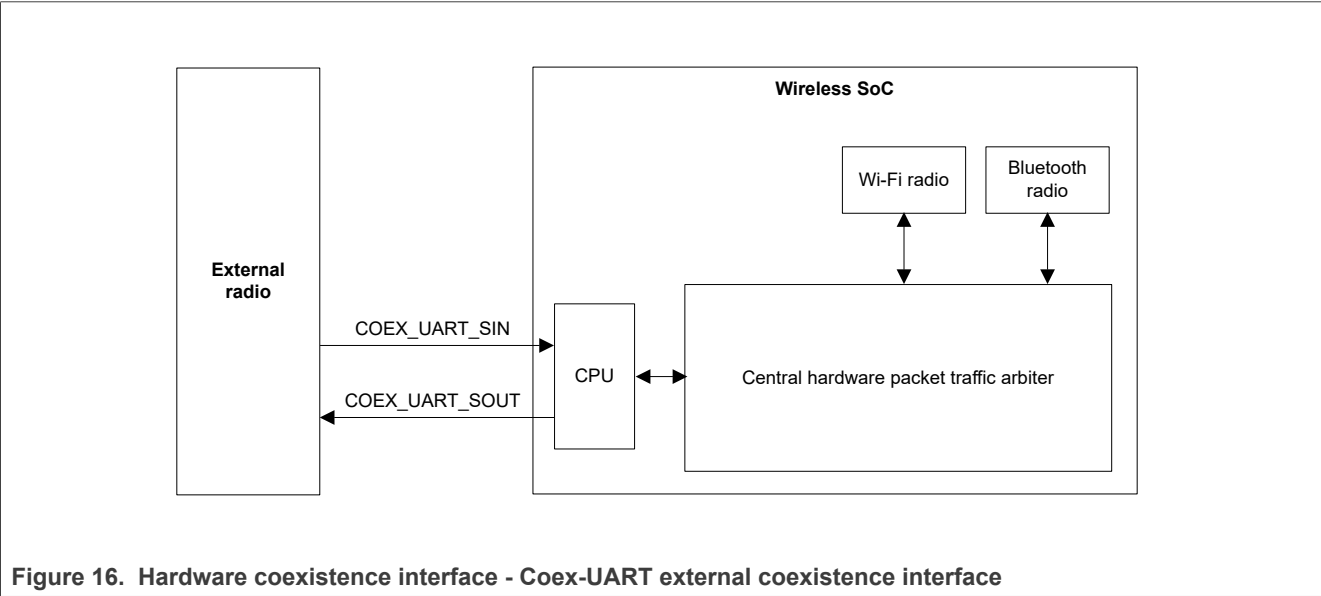


Note: Refer to [Section 6.5.11](#) for the description of PTA external coexistence interface signals.

The UART messages from the external radio are handled within the CPU and coordinated with the central hardware packet traffic arbiter for the arbitration with the on-chip radios.

Debug-UART external coexistence interface

Figure 17 illustrates the hardware coexistence interface between the central hardware packet traffic arbiter and the external radio. In the figure, Wireless SoC is IW693P.

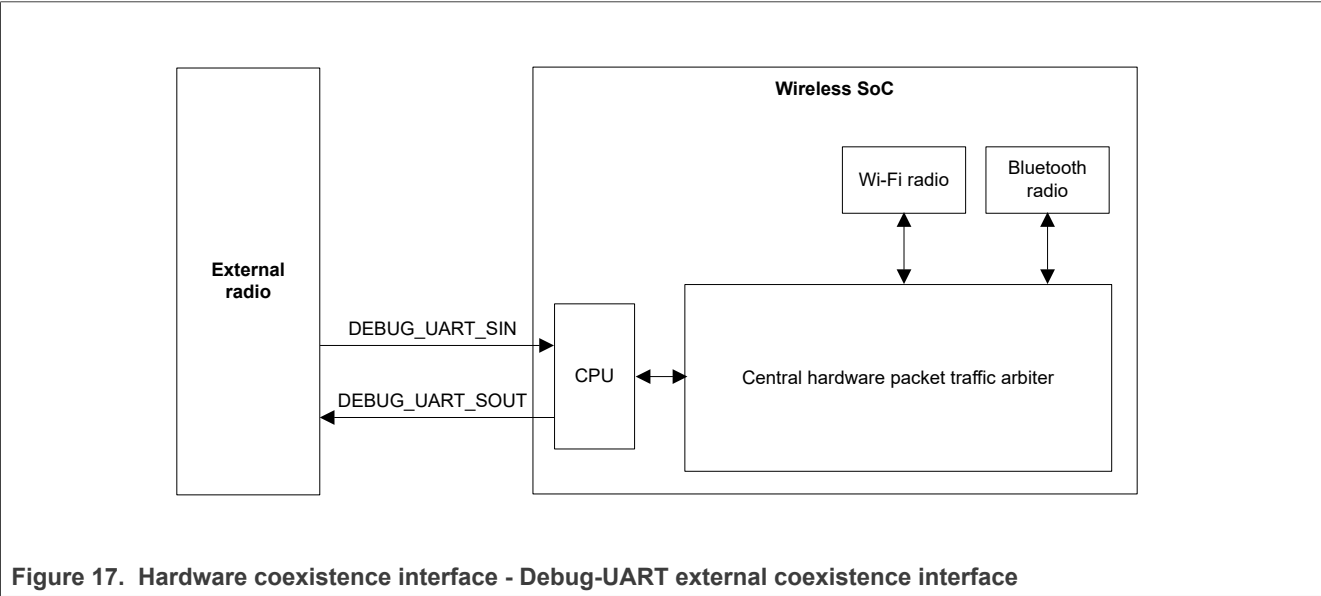

Note: Refer to [Section 6.5.12](#) for the description of PTA external coexistence interface signals.

The UART messages from the external radio are handled within the CPU and coordinated with the central hardware packet traffic arbiter for the arbitration with the on-chip radios.

6 Pin information

6.1 Signal diagram

Note: Signals are muxed on dedicated pins. See [Section 6.5 "Pin description"](#) for the dedicated pin/muxed signal descriptions.

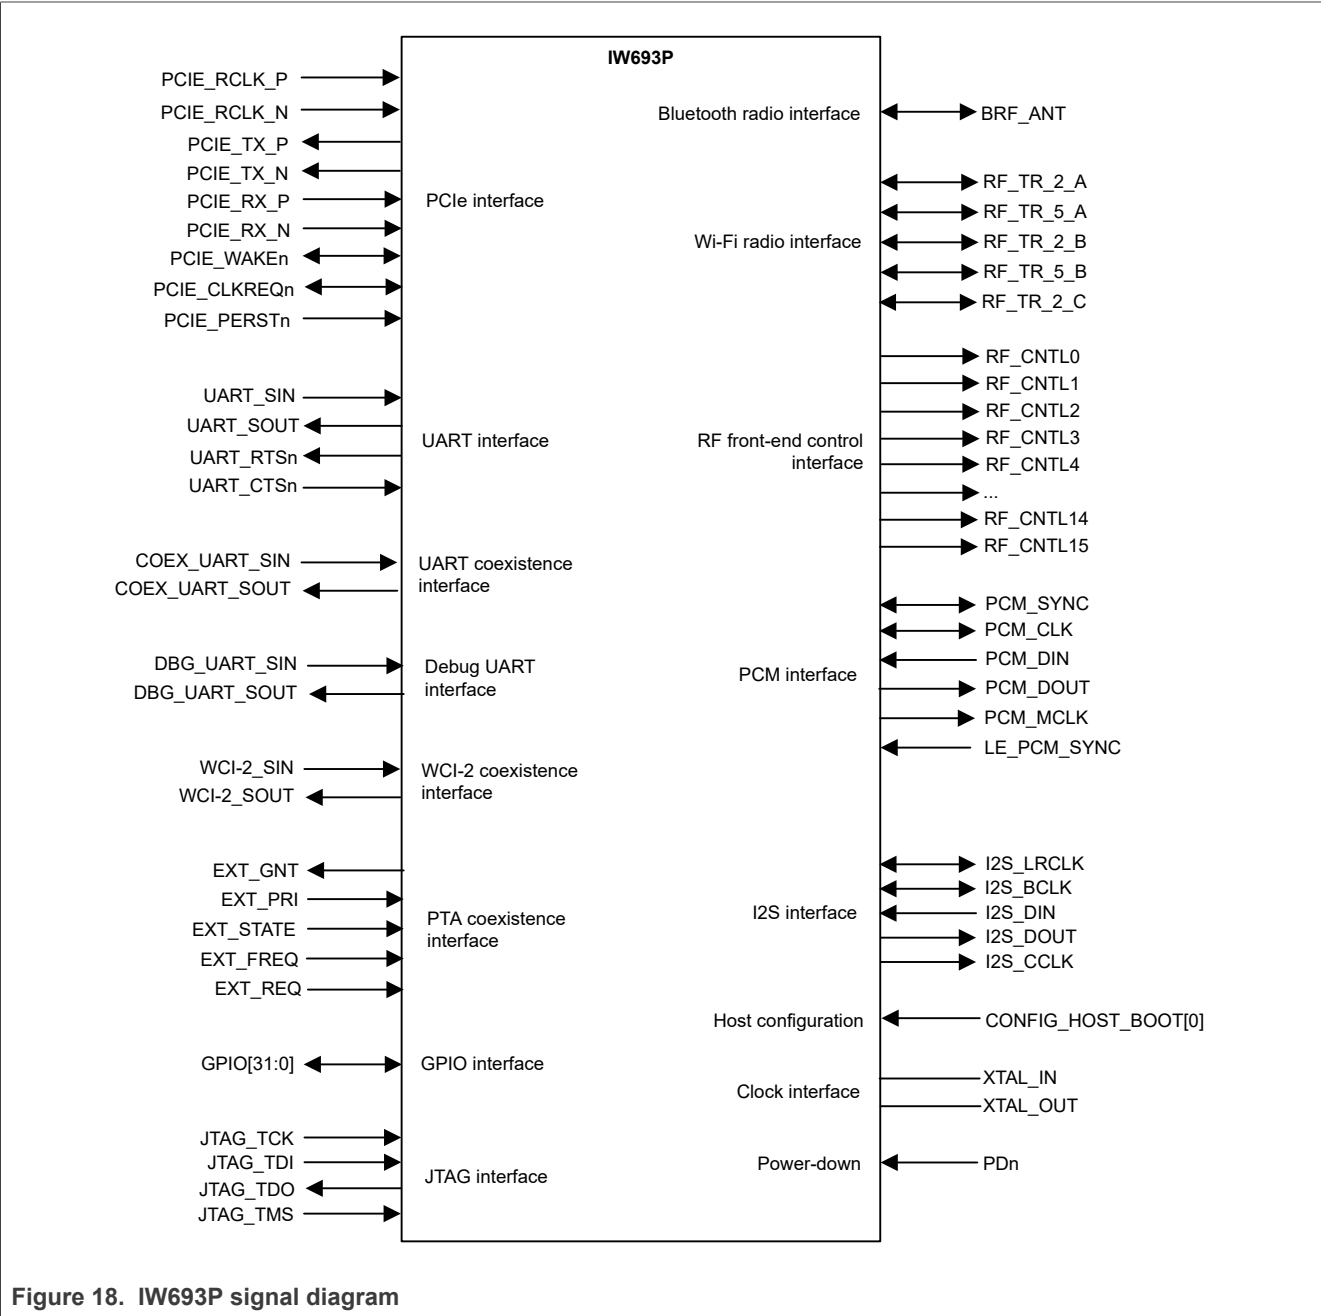


Figure 18. IW693P signal diagram

The diagram illustrates the pin assignment for the IW693P package, specifically for the PCIe host interface for Wi-Fi. The package is shown from a top-down perspective, with pins numbered 1 through 148. The central area is labeled "Wireless SoC".

Pin Assignments (Left Side):

- 1: VSS
- 2: GPIO[24]
- 3: GPIO[25]
- 4: GPIO[26]
- 5: GPIO[27]
- 6: VIO
- 7: GPIO[28]
- 8: GPIO[29]
- 9: GPIO[30]
- 10: VCORE
- 11: GPIO[31]
- 12: RF_CNTL15
- 13: RF_CNTL14
- 14: RF_CNTL13
- 15: RF_CNTL12
- 16: RF_CNTL11
- 17: RF_CNTL10
- 18: RF_CNTL9
- 19: RF_CNTL8
- 20: VIO_RF
- 21: RF_CNTL7
- 22: RF_CNTL5
- 23: RF_CNTL6
- 24: RF_CNTL4
- 25: RF_CNTL2
- 26: RF_CNTL3
- 27: RF_CNTL0
- 28: RF_CNTL1
- 29: AVDD18
- 30: AVDD18
- 31: AVDD18
- 32: AVDD18
- 33: VSS
- 34: AVDD18
- 35: AVDD18
- 36: AVDD18
- 37: VSS
- 38: VSS
- 39: VPA
- 40: VSS
- 41: VSS
- 42: AVDD18
- 43: AVDD18
- 44: VPA
- 45: VSS
- 46: VSS
- 47: VSS
- 48: AVDD18
- 49: AVDD18
- 50: AVDD18
- 51: VSS
- 52: VSS
- 53: VSS
- 54: AVDD18
- 55: VSS
- 56: VSS
- 57: VPA
- 58: VPA
- 59: VSS
- 60: VSS
- 61: VSS
- 62: VSS
- 63: AVDD18
- 64: AVDD18
- 65: VSS
- 66: VSS
- 67: VSS
- 68: AVDD18
- 69: VSS
- 70: VPA
- 71: VPA
- 72: VSS
- 73: VSS
- 74: VSS

Pin Assignments (Right Side):

- 111: VSS
- 110: GPIO[7]
- 109: BUCK_VIN
- 108: BUCK_VIN
- 107: BUCK_VOUT
- 106: BUCK_VOUT
- 105: BUCK_SENSE
- 104: GPIO[6]
- 103: GPIO[5]
- 102: VIO
- 101: GPIO[4]
- 100: GPIO[3]
- 99: GPIO[2]
- 98: GPIO[1]
- 97: GPIO[0]
- 96: VCORE
- 95: Pdn
- 94: DNC
- 93: DNC
- 92: DNC
- 91: DNC
- 90: DNC
- 89: DNC
- 88: DNC
- 87: CONFIG_HOST_BOOT[0]
- 86: AVDD18
- 85: XTAL_OUT
- 84: XTAL_IN
- 83: AVDD18
- 82: AVDD18
- 81: AVDD18
- 80: AVDD18
- 79: VSS
- 78: AVDD18
- 77: AVDD18
- 76: AVDD18
- 75: VSS

Pin Assignments (Top Side):

- 148: VSS
- 147: BRF_ANT
- 146: VSS
- 145: AVDD18
- 144: AVDD18
- 143: AVDD18
- 142: GPIO[23]
- 141: GPIO[22]
- 140: GPIO[21]
- 139: GPIO[20]
- 138: VIO
- 137: GPIO[19]
- 136: GPIO[18]
- 135: GPIO[17]
- 134: GPIO[16]
- 133: VCORE
- 132: GPIO[15]
- 131: GPIO[14]
- 130: GPIO[13]
- 129: GPIO[12]
- 128: GPIO[11]
- 127: VIO
- 126: GPIO[10]
- 125: PCIE_WAKEn
- 124: PCIE_CLKREQn
- 123: VCORE
- 122: PCIE_RX_P
- 121: PCIE_RX_N
- 120: AVDD18
- 119: PCIE_TX_N
- 118: PCIE_TX_P
- 117: PCIE_RCLK_N
- 116: PCIE_RCLK_P
- 115: GPIO[9]
- 114: GPIO[8]
- 113: AVDD18
- 112: VSS

6.3 Pin types

Table 5. Pin types

Pin type	Description
I/O	Digital input/output
I	Digital input
O	Digital output
A, I	Analog input
A, O	Analog output
A, I/O	Analog input/output
DNC	Do not connect
Power	Power
Ground	Ground

6.4 Pin list – HVQFN package

[Table 6](#) lists the pins for IW693P in HVQFN package, with PCIe host interface for Wi-Fi.

Table 6. Pin list by number – PCIe host interface for Wi-Fi

Pin number	Pin name	Supply	Type
1	VSS	—	Ground
2	GPIO[24]	VIO	I/O
3	GPIO[25]	VIO	I/O
4	GPIO[26]	VIO	I/O
5	GPIO[27]	VIO	I/O
6	VIO	—	Power
7	GPIO[28]	VIO	I/O
8	GPIO[29]	VIO	I/O
9	GPIO[30]	VIO	I/O
10	VCORE	—	Power
11	GPIO[31]	VIO_RF	I/O
12	RF_CNTL15	VIO_RF	O
13	RF_CNTL14	VIO_RF	O
14	RF_CNTL13	VIO_RF	O
15	RF_CNTL12	VIO_RF	O
16	RF_CNTL11	VIO_RF	O
17	RF_CNTL10	VIO_RF	O
18	RF_CNTL9	VIO_RF	O
19	RF_CNTL8	VIO_RF	O
20	VIO_RF	—	Power
21	RF_CNTL7	VIO_RF	O
22	RF_CNTL5	VIO_RF	O
23	RF_CNTL6	VIO_RF	O
24	RF_CNTL4	VIO_RF	O
25	RF_CNTL2	VIO_RF	O
26	RF_CNTL3	VIO_RF	O
27	RF_CNTL0	VIO_RF	O
28	RF_CNTL1	VIO_RF	O
29	AVDD18	—	Power
30	AVDD18	—	Power
31	AVDD18	—	Power
32	AVDD18	—	Power
33	VSS	—	Ground

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 6. Pin list by number – PCIe host interface for Wi-Fi...continued

Pin number	Pin name	Supply	Type
34	AVDD18	—	Power
35	AVDD18	—	Power
36	AVDD18	—	Power
37	VSS	—	Ground
38	VSS	—	Ground
39	VPA	—	Power
40	VSS	—	Ground
41	RF_TR_2_C	AVDD18	A, I/O
42	VSS	—	Ground
43	AVDD18	—	Power
44	AVDD18	—	Power
45	VPA	—	Power
46	VSS	—	Ground
47	RF_TR_2_B	AVDD18	A, I/O
48	VSS	—	Ground
49	AVDD18	—	Power
50	AVDD18	—	Power
51	AVDD18	—	Power
52	VSS	—	Ground
53	RF_TR_5_B	AVDD18	A, I/O
54	VSS	—	Ground
55	AVDD18	—	Power
56	VSS	—	Ground
57	VPA	—	Power
58	VPA	—	Power
59	VPA	—	Power
60	VSS	—	Ground
61	RF_TR_2_A	AVDD18	A, I/O
62	VSS	—	Ground
63	AVDD18	—	Power
64	AVDD18	—	Power
65	AVDD18	—	Power
66	VSS	—	Ground
67	RF_TR_5_A	AVDD18	A, I/O
68	VSS	—	Ground
69	AVDD18	—	Power

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 6. Pin list by number – PCIe host interface for Wi-Fi...continued

Pin number	Pin name	Supply	Type
70	VSS	—	Ground
71	VPA	—	Power
72	VPA	—	Power
73	VSS	—	Ground
74	VSS	—	Ground
75	VSS	—	Ground
76	AVDD18	—	Power
77	AVDD18	—	Power
78	AVDD18	—	Power
79	VSS	—	Ground
80	AVDD18	—	Power
81	AVDD18	—	Power
82	AVDD18	—	Power
83	AVDD18	—	Power
84	XTAL_IN	AVDD18	A, I
85	XTAL_OUT	AVDD18	A, O
86	AVDD18	—	Power
87	CONFIG_HOST_BOOT[0]	AVDD18	I
88	DNC	—	DNC
89	DNC	—	DNC
90	DNC	—	DNC
91	DNC	—	DNC
92	DNC	—	DNC
93	DNC	—	DNC
94	DNC	—	DNC
95	PDn	AVDD18	I
96	VCORE	—	Power
97	GPIO[0]	VIO	I/O
98	GPIO[1]	VIO	I/O
99	GPIO[2]	VIO	I/O
100	GPIO[3]	VIO	I/O
101	GPIO[4]	VIO	I/O
102	VIO	—	Power
103	GPIO[5]	VIO	I/O
104	GPIO[6]	VIO	I/O
105	BUCK_SENSE	—	Power

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 6. Pin list by number – PCIe host interface for Wi-Fi...continued

Pin number	Pin name	Supply	Type
106	BUCK_VOUT	—	Power
107	BUCK_VOUT	—	Power
108	BUCK_VIN	—	Power
109	BUCK_VIN	—	Power
110	GPIO[7]	VIO	I/O
111	VSS	—	Ground
112	VSS	—	Ground
113	AVDD18	—	Power
114	GPIO[8]	VIO	I/O
115	GPIO[9]	VIO	I/O
116	PCIE_RCLK_P	AVDD18	I
117	PCIE_RCLK_N	AVDD18	I
118	PCIE_TX_P	AVDD18	O
119	PCIE_TX_N	AVDD18	O
120	AVDD18	—	Power
121	PCIE_RX_N	AVDD18	I
122	PCIE_RX_P	AVDD18	I
123	VCORE	—	Power
124	PCIE_CLKREQn	VIO	I/O
125	PCIE_WAKEn	VIO	I/O
126	GPIO[10]	VIO	I/O
127	VIO	—	Power
128	GPIO[11]	VIO	I/O
129	GPIO[12]	VIO	I/O
130	GPIO[13]	VIO	I/O
131	GPIO[14]	VIO	I/O
132	GPIO[15]	VIO	I/O
133	VCORE	—	Power
134	GPIO[16]	VIO	I/O
135	GPIO[17]	VIO	I/O
136	GPIO[18]	VIO	I/O
137	GPIO[19]	VIO	I/O
138	VIO	—	Power
139	GPIO[20]	VIO	I/O
140	GPIO[21]	VIO	I/O
141	GPIO[22]	VIO	I/O

Table 6. Pin list by number – PCIe host interface for Wi-Fi...continued

Pin number	Pin name	Supply	Type
142	GPIO[23]	VIO	I/O
143	AVDD18	—	Power
144	AVDD18	—	Power
145	AVDD18	—	Power
146	VSS	—	Ground
147	BRF_ANT	AVDD18	A, I/O
148	VSS	—	Ground

6.5 Pin description

6.5.1 Pin states

The pin states information provided in the tables includes:

- **No Pad Power State** indicates the state when there is no power
- **PwrDwn State** denotes the power-down state in the default configuration. Many pads have programmable power-down values which can be set by firmware.
- **Reset State** is the state after the power-on-reset state and before the hardware state (HW State)
- **HW State** (hardware state) is the state after the boot code finishes and before the firmware download begins (firmware may change the pin state). HW State may differ based on the pin muxing/configuration setting. For example, for UART_RTSn and UART_SOUT, the boot code enables the UART interface when the device is in PCIe-UART mode, making the HW states output high and output low, respectively.
- **PwrDwn Prog** indicates if the power-down state can be programmed
- **Internal PU/PD** columns indicates the following:
 - Type of PU/PD (weak vs nominal)
 - The polarity (PU vs. PD)The internal pull-up or pull-down applies when the pin is in input mode
- **PU** denotes whether the pull-up can be programmed or not
- **PD** denotes whether the pull-down can be programmed or not
- Pull-up and pull-down are only effective when the pad is in input mode
- At the end of the firmware download, the pads (for example GPIO and RF control) are programmed in the functional mode corresponding to the functionality of the pins

6.5.2 General purpose I/O (GPIO)

Table 7. General purpose I/O (MFP)

Pins may be Multi-Functional Pins (MFP). See the pin descriptions for functional modes.

Pin name	Supply	No Pad Power State ^[1]	Reset state	HW state	PwrDwn state	PwrDwn prog	Internal PU/ PD	PU	PD
GPIO[31]	VIO_RF	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[31] (input/output) PCIe mode: PCIE_PERSTn - PCIe host indication to reset the PCIe interface (input) (active low). See Section 6.5.6 "PCIe host interface" .									
GPIO[30]	VIO	tristate	output high	output high	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[30] (input/output) JTAG mode: JTAG_TDO - JTAG test data (output) (default mode). See Section 6.5.19 "JTAG interface" .									
GPIO[29]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[29] (input/output) JTAG mode: JTAG_TDI - JTAG test data (input). See Section 6.5.19 "JTAG interface" . Bluetooth PCM mode: LE_PCM_SYNC2 - PCM sync pulse signal (input). Alternate assignment of LE_PCM_SYNC1 (GPIO[2]). See Section 6.5.8 "Digital audio interface" .									
GPIO[28]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[28] (input/output) JTAG mode: JTAG_TMS - JTAG test mode select (input) (default mode). See Section 6.5.19 "JTAG interface" .									
GPIO[27]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[27] (input/output) JTAG mode: JTAG_TCK - JTAG clock (input). See Section 6.5.19 "JTAG interface" .									
GPIO[26]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[26] (input/output) UART coexistence mode: COEX_UART_SOUT - Coexistence UART transmit serial data (output). See Section 6.5.11 "UART coexistence interface" . WCI-2 coexistence mode: WCI-2_SIN - WCI-2 receive serial data (input). See Section 6.5.10 "WCI-2 coexistence interface" .									
GPIO[25]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[25] (input/output) UART coexistence mode: COEX_UART_SIN - Coexistence UART receive serial data (input) . See Section 6.5.11 "UART coexistence interface" . WCI-2 coexistence mode: WCI-2_SOUT - WCI-2 transmit serial data (output). See Section 6.5.10 "WCI-2 coexistence interface" .									
GPIO[24]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[24] (input/output) TSF host clock sync mode: MCU_TSF_SYNC – TSF clock synchronization indication to MCU (input)									
GPIO[23]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[23] (input/output) Narrowband trigger mode: NB1_HOST_TRIG1 - Host_Trigger pin 1 (input/output) for the narrowband (Bluetooth) and host									

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 7. General purpose I/O (MFP) ...continued

Pins may be Multi-Functional Pins (MFP). See the pin descriptions for functional modes.

Pin name	Supply	No Pad Power State ^[1]	Reset state	HW state	PwrDwn state	PwrDwn prog	Internal PU/ PD	PU	PD
GPIO[22]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[22] (input/output) Narrowband trigger mode: NB1_HOST_TRIG0 - Host_Trigger pin 0 (input/output) for the narrowband (Bluetooth) and host									
GPIO[21]	VIO	tristate	input	input/output high	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[21] (input/output) UART interface mode: UART_SOUT - UART transmit serial data (output). See Section 6.5.7 "UART host interface" .									
GPIO[20]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[20] (input/output) UART interface mode: UART_SIN - UART receive serial data (input). See Section 6.5.7 "UART host interface" .									
GPIO[19]	VIO	tristate	input	input/output high	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[19] (input/output) UART interface mode: UART_RTSn - UART request-to-send (output). See Section 6.5.7 "UART host interface" .									
GPIO[18]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[18] (input/output) UART interface mode: UART_CTSn - UART clear-to-send (input). See Section 6.5.7 "UART host interface" .									
GPIO[17]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[17] (input/output) MAC1 TSF clock sync mode: TSF clock synchronization indication to host from MAC1 (output). MAC2 TSF clock sync mode: TSF clock synchronization indication to host from MAC2 (output).									
GPIO[16]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
Wake-up/interrupt mode: NB_WAKE_IN – Bluetooth wake-up signal (input). See Section 6.5.13 "Wake-up/interrupt interface" .									
GPIO[15]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[15] (input/output) PTA coexistence mode: EXT_GNT - External radio grant signal (output). See Section 6.5.9 "PTA coexistence interface" .									
GPIO[14]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[14] (input/output) PTA coexistence mode: EXT_FREQ - External radio frequency signal (input). See Section 6.5.9 "PTA coexistence interface" . Debug UART mode: DBG_UART_SIN - Debug UART signal for Wi-Fi (input). See Section 6.5.12 "Debug UART interface" .									
GPIO[13]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[13] (input/output) PTA coexistence interface mode: EXT_STATE (input). See Section 6.5.9 "PTA coexistence interface" . Debug UART mode: DBG_UART_SOUT - Debug UART signal for Wi-Fi (output). See Section 6.5.12 "Debug UART interface" .									

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 7. General purpose I/O (MFP) ...continued

Pins may be Multi-Functional Pins (MFP). See the pin descriptions for functional modes.

Pin name	Supply	No Pad Power State ^[1]	Reset state	HW state	PwrDwn state	PwrDwn prog	Internal PU/ PD	PU	PD
GPIO[12]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[12] (input/output) PTA coexistence interface mode: EXT_PRI (input). See Section 6.5.9 "PTA coexistence interface" . WCI-2 coexistence mode: WCI-2_SIN (input). See Section 6.5.10 "WCI-2 coexistence interface" . Debug UART mode: DBG_UART_SIN - Alternate Debug UART signal for Wi-Fi (input). See Section 6.5.12 "Debug UART interface" .									
GPIO[11]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[11] (input/output) PTA coexistence interface mode: EXT_REQ (input). See Section 6.5.9 "PTA coexistence interface" . WCI-2 coexistence mode: WCI-2_SOUT (output). See Section 6.5.10 "WCI-2 coexistence interface" . Debug UART mode: DBG_UART_SOUT - Alternate debug UART signal for Wi-Fi (output). See Section 6.5.12 "Debug UART interface" .									
GPIO[10]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[10] (input/output) Wake-up/interrupt mode: NB_WAKE_OUT – Bluetooth out-of-band wake-up signal to host (output). See Section 6.5.13 "Wake-up/interrupt interface" .									
GPIO[9]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[9] (input/output) Wake-up/interrupt mode: WLAN_WAKE_OUT – Wi-Fi out-of-band wake-up signal to host (output). See Section 6.5.13 "Wake-up/interrupt interface" .									
GPIO[8]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[8] (input/output) Wake-up/interrupt mode: WLAN_WAKE_IN – Wi-Fi out-of-band wake-up signal (input). See Section 6.5.13 "Wake-up/interrupt interface" .									
GPIO[7]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[7] (input/output) LED mode: LED_OUT_BT (output) - LED indication for Bluetooth activity Reset recovery mode: WLAN_RST - Independent software reset for Wi-Fi (input). See Section 6.5.14 "Software reset interface" .									
GPIO[6]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[6] (input/output) Bluetooth PCM mode: PCM_DIN - PCM receive data signal (input). See Section 6.5.8 "Digital audio interface" . Bluetooth I2S mode: I2S_DIN - I2S receive data signal (input). See Section 6.5.8 "Digital audio interface" .									
GPIO[5]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[5] (input/output) Bluetooth PCM mode: PCM_DOUT - PCM transmit data signal (output). See Section 6.5.8 "Digital audio interface" . Bluetooth I2S mode: I2S_DOUT - I2S transmit data signal (output). See Section 6.5.8 "Digital audio interface" .									

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 7. General purpose I/O (MFP) ...continued

Pins may be Multi-Functional Pins (MFP). See the pin descriptions for functional modes.

Pin name	Supply	No Pad Power State ^[1]	Reset state	HW state	PwrDwn state	PwrDwn prog	Internal PU/ PD	PU	PD
GPIO[4]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[4] (input/output) Bluetooth PCM mode: PCM_CLK - PCM data clock (output if central, input if peripheral). See Section 6.5.8 "Digital audio interface" . Bluetooth I2S mode: I2S_BCLK - I2S audio bit clock (output if central, input if peripheral). See Section 6.5.8 "Digital audio interface" .									
GPIO[3]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[3] (input/output) Bluetooth I2S mode: I2S_CCLK - I2S clock output signal (optional). See Section 6.5.8 "Digital audio interface" . Bluetooth PCM mode: PCM_MCLK - PCM clock output signal (optional). See Section 6.5.8 "Digital audio interface" . LED mode: LED_OUT_WLAN (output) - LED indication of Wi-Fi activity									
GPIO[2]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[2] (input/output) Bluetooth PCM mode: PCM_SYNC - PCM frame sync (output if central, input if peripheral). See Section 6.5.8 "Digital audio interface" . Bluetooth I2S mode: I2S_LRCLK - I2S left/right clock (output if central, input if peripheral). See Section 6.5.8 "Digital audio interface" . Bluetooth PCM mode - LE_PCM_SYNC1 - PCM sync pulse signal (input). Alternate assignment of LE_PCM_SYNC2 (GPIO[29]). See Section 6.5.8 "Digital audio interface" .									
GPIO[1]	VIO	tristate	input	input	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[1] (input/output) Reset recovery mode: NB_RST - Independent software reset for Bluetooth subsystem (input). See Section 6.5.14 "Software reset interface" .									
GPIO[0]	VIO	tristate	output	output high	tristate	yes	weak PU	yes	yes
GPIO mode: GPIO[0] (input/output) Oscillator enable mode: XOSC_EN - Oscillator Enable (output) (active high). See Section 6.5.16 "Clock interface" .									

[1] Maximum input voltage is 0.4V when VIO has no power (or in uncertain situations).

6.5.3 RF front-end control interface

Table 8. RF front-end control interface^[1]

Pin name	Supply	No pad power state	Reset state	HW state	PwrDwn state	PwrDwn prog.	Internal PU/PD	PU	PD
RF_CNTL0	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control mode: RF control 0 - RF control line 0 used to control the front-end module (FEM)									
RF_CNTL1	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control mode: RF control 1 - RF control line 1 used to control the front-end module (FEM)									
RF_CNTL2	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 2 — RF control line 2									
RF_CNTL3	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 3 — RF control line 3									
RF_CNTL4	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 4 — RF control line 4									
RF_CNTL5	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 5 — RF control line 5									
RF_CNTL6	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 6 — RF control line 6									
RF_CNTL7	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 7 — RF control line 7									
RF_CNTL8	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 8 — RF control line 8									
RF_CNTL9	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 9 — RF control line 9									
RF_CNTL10	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 10 — RF control line 10									
RF_CNTL11	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 11 — RF control line 11									
RF_CNTL12	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 12 — RF control line 12									
RF_CNTL13	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 13 — RF control line 13									
RF_CNTL14	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 14 — RF control line 14									
RF_CNTL15	VIO_RF	tristate	output low	output low	drive low	yes	weak PU	yes	yes
RF control 15 — RF control line 15									

[1] Maximum input voltage is 0.4V when VIO_RF has no power (or in uncertain situations).

6.5.4 Wi-Fi radio interface

Table 9. Wi-Fi radio interface

Pin name	Type	Supply	Description
RF_TR_2_A	A, I/O	AVDD18	Wi-Fi transmit/receive path A (2.4 GHz)
RF_TR_2_B	A, I/O	AVDD18	Wi-Fi transmit/receive path B (2.4 GHz)
RF_TR_2_C	A, I/O	AVDD18	Wi-Fi transmit/receive path C (2.4 GHz)
RF_TR_5_A	A, I/O	AVDD18	Wi-Fi transmit/receive path A (5-7 GHz)
RF_TR_5_B	A, I/O	AVDD18	Wi-Fi transmit/receive path B (5-7 GHz)

6.5.5 Bluetooth radio interface

Table 10. Bluetooth radio interface

Pin name	Type	Supply	Description
BRF_ANT	A, I/O	AVDD18	Bluetooth radio transmit/receive interface

6.5.6 PCIe host interface

Table 11. PCIe host interface (MFP)

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin Name	Supply	No Pad Power State ^[1]	Reset State	HW State	PwrDwn State	PwrDwn Prog	Internal PU/PD	PU	PD
PCIE_RCLK_P	AVDD18	—	—	—	—	—	—	—	—
PCI Express Differential Clock Input—Positive									
PCIE_RCLK_N	AVDD18	—	—	—	—	—	—	—	—
PCI Express Differential Clock Input—Negative									
PCIE_TX_P	AVDD18	—	—	—	—	—	—	—	—
PCI Express Transmit Data—Positive									
PCIE_TX_N	AVDD18	—	—	—	—	—	—	—	—
PCI Express Transmit Data—Negative									
PCIE_RX_P	AVDD18	—	—	—	—	—	—	—	—
PCI Express Receive Data—Positive									
PCIE_RX_N	AVDD18	—	—	—	—	—	—	—	—
PCI Express Receive Data—Negative									
PCIE_WAKEn	VIO	tristate	input	input	n/a	n/a	n/a	no	no
PCIe wake signal (input/output) (active low) Note: An external pull-up (on host side) is required.									
PCIE_CLKREQn	VIO	tristate	output low	output low	n/a	n/a	n/a	no	no
PCIe clock request (input/output) (active low) Note: An external pull-up (on host side) is required.									
PCIE_PERSTn	VIO_RF	tristate	input	input	tristate	yes	nominal PD	yes	yes
PCIe host indication to reset the PCIe interface (input) (active low) Note: Muxed with GPIO[31].									

[1] Maximum input voltage is 0.4V when VIO has no power (or in uncertain situations).

6.5.7 UART host interface

Table 12. UART host interface (MFP)

Pins may be Multi-Functional Pins (MFP).

Pin name	Type	Supply	Description
UART_SIN	I	VIO	UART serial input signal - Muxed with GPIO[20]
UART_SOUT	O	VIO	UART serial output signal - Muxed with GPIO[21]
UART_RTSn	O	VIO	UART request-to-send output signal - Active low - Muxed with GPIO[19]
UART_CTSn	I	VIO	UART clear-to-send input signal - Active low - Muxed with GPIO[18]

6.5.8 Digital audio interface

Table 13. Audio interface pins

Pins may be Multi-Functional Pins (MFP).

Pin name	Type	Supply	Description
PCM_DIN	I	VIO	PCM audio codec output data (for recording) - Muxed with GPIO[6]
PCM_DOUT	O	VIO	PCM audio codec input data (for playback) - Muxed with GPIO[5]
PCM_SYNC	I/O	VIO	PCM sync pulse signal - Muxed with GPIO[2] . Central mode: output . Peripheral mode: input
PCM_CLK	I/O	VIO	PCM clock signal - Muxed with GPIO[4] . Central mode: output . Peripheral mode: input
PCM_MCLK	O	VIO	PCM clock output signal (optional) - Muxed with GPIO[3] Optional clock used for some codecs. Derived from PCM_CLK.
LE_PCM_SYNC1	I	VIO	Bluetooth LE PCM sync pulse signal for Bluetooth LE audio function (input). Muxed with GPIO[2]
LE_PCM_SYNC2	I	VIO	Bluetooth LE PCM sync pulse signal for Bluetooth LE audio function (input). Alternate assignment of PCM_SYNC1. Muxed with GPIO[29]
I2S_DIN	I	VIO	I2S audio codec output data (for recording) - Muxed with GPIO[6]
I2S_DOUT	O	VIO	I2S audio codec input data (for playback) - Muxed with GPIO[5]
I2S_BCLK	I/O	VIO	I2S audio bit clock - Muxed with GPIO[4] . Central mode: output . Peripheral mode: input
I2S_LRCLK	I/O	VIO	I2S audio left/right clock - Muxed with GPIO[2] . Central mode: output . Peripheral mode: input
I2S_CCLK	O	VIO	I2S codec main clock (optional) - Muxed with GPIO[3] Optional clock used for some codecs. Derived from I2S_BCLK.

6.5.9 PTA coexistence interface

Table 14. PTA coexistence interface (MFP)

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin Name	Type	Supply	Description
EXT_STATE	I	VIO	External radio state input signal (optional) - muxed with GPIO[13]. See Section 6.5.3 "RF front-end control interface" . External radio traffic direction (TX/RX): 1: TX (default) 0: RX
EXT_GNT	O	VIO	External radio grant output signal (mandatory) - muxed with GPIO[15]
EXT_FREQ	I	VIO	External radio frequency input signal (optional) - muxed with GPIO[14]. See Section 6.5.3 "RF front-end control interface" . Frequency overlap between external radio and Wi-Fi: 1: overlap 0: non-overlap This signal is useful when the external radio is a frequency hopping device.
EXT_PRI	I	VIO	External radio input priority signal (optional) - muxed with GPIO[12] Priority of the request from the external radio. Can support 1 bit priority (sample once) and 2 bit priority (sample twice). Can also have TX/RX info following the priority info if EXT_STATE is not used.
EXT_REQ	I	VIO	Request from the external radio (mandatory) - muxed with GPIO[11]

6.5.10 WCI-2 coexistence interface

Table 15. WCI-2 coexistence interface - Option 1

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
WCI-2_SOUT	O	VIO	WCI-2 output signal - muxed with GPIO[11]. See Section 6.5.2 "General purpose I/O (GPIO)" .
WCI-2_SIN	I	VIO	WCI-2 input signal - muxed with GPIO[12]. See Section 6.5.2 "General purpose I/O (GPIO)" .

Table 16. WCI-2 coexistence interface - Option 2

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
WCI-2_SOUT	O	VIO	WCI-2 output signal - muxed with GPIO[25]. See Section 6.5.2 "General purpose I/O (GPIO)" .
WCI-2_SIN	I	VIO	WCI-2 input signal - muxed with GPIO[26]. See Section 6.5.2 "General purpose I/O (GPIO)" .

6.5.11 UART coexistence interface

Table 17. UART coexistence interface

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
COEX_UART_SOUT	O	VIO	COEX_UART output signal - muxed with GPIO[26]. See Section 6.5.2 "General purpose I/O (GPIO)" .
COEX_UART_SIN	I	VIO	COEX_UART input signal - muxed with GPIO[25]. See Section 6.5.2 "General purpose I/O (GPIO)" .

6.5.12 Debug UART interface

Table 18. Debug UART coexistence interface - Option 1

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
DBG_UART_SOUT	O	VIO	DBG_UART output signal - muxed with GPIO[13]. See Section 6.5.2 "General purpose I/O (GPIO)" .
DBG_UART_SIN	I	VIO	DBG_UART input signal - muxed with GPIO[14]. See Section 6.5.2 "General purpose I/O (GPIO)" .

Table 19. Debug UART coexistence interface - Option 2

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
DBG_UART_SOUT	O	VIO	DBG_UART output signal - muxed with GPIO[11]. See Section 6.5.2 "General purpose I/O (GPIO)" .
DBG_UART_SIN	I	VIO	DBG_UART input signal - muxed with GPIO[12]. See Section 6.5.2 "General purpose I/O (GPIO)" .

6.5.13 Wake-up/interrupt interface

Table 20. Wake-up/interrupt interface

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
NB_WAKE_IN	I	VIO	Bluetooth out-of-band wake-up signal (input) - muxed with GPIO[16]. See Section 6.5.2 "General purpose I/O (GPIO)" .
NB_WAKE_OUT	O	VIO	Bluetooth out-of-band wake-up signal to host (output) - muxed with GPIO[10]. See Section 6.5.2 "General purpose I/O (GPIO)" .
WLAN_WAKE_IN	I	VIO	Wi-Fi out-of-band wake-up signal (input) - muxed with GPIO[8]. See Section 6.5.2 "General purpose I/O (GPIO)" .
WLAN_WAKE_OUT	O	VIO	Wi-Fi out-of-band wake-up signal to host (output) - muxed with GPIO[9]. See Section 6.5.2 "General purpose I/O (GPIO)" .

6.5.14 Software reset interface

Table 21. Software reset interface

Pins may be Multi-Functional Pins (MFP). See pin descriptions for functional modes.

Pin name	Type	Supply	Description
WLAN_RST	O	VIO	Independent software reset for Wi-Fi (input) - muxed with GPIO[7]. See Section 6.5.2 "General purpose I/O (GPIO)" .
NB_RST	O	VIO	Independent software reset for Bluetooth (input) - muxed with GPIO[1]. See Section 6.5.2 "General purpose I/O (GPIO)" .

6.5.15 Host configuration

Table 22. Host configuration

Pin name	Supply	No pad power state	Reset state	HW state	PwrDwn state	PwrDwn prog.	Internal PU/PD	PU	PD
CONFIG_HOST_BOOT[0]	AVDD18	tristate	input	input	tristate	no	weak PD	yes	yes
CONFIG_HOST_BOOT[0]: see Section 6.6 "Configuration pins "									

6.5.16 Clock interface

Table 23. Clock interface

Pin Name	Supply	No Pad Power State ^[1]	Reset State	HW State	PwrDwn State	PwrDwn Prog	Internal PU/PD	PU	PD
XTAL_IN	AVDD18	—	—	—	—	—	—	—	—
Reference clock input signal. The reference clock signal frequency must be 40 MHz from an external crystal or external crystal oscillator. To achieve lower power consumption in sleep mode, it is recommended to use an external crystal instead of an external crystal oscillator. See Section 11.8 "Reference clock specifications" .									
XTAL_OUT	AVDD18	—	—	—	—	—	—	—	—
Reference clock output signal. Connect this pin to an external crystal when an external crystal is used. When an external crystal oscillator is used, connect this pin to ground with resistance less than 100 Ω.									
XOSC_EN	VIO	tristate	output	output high	drive low	yes	nominal PU	yes	yes
Oscillator enable output signal (active high) used to enable an external oscillator. XOSC_EN signal can be used ONLY when an external oscillator clock is used. 0 = disable external oscillator 1 = enable external oscillator Note: Muxed with GPIO[0]. See Section 6.5.2 "General purpose I/O (GPIO)" .									

[1] Maximum input voltage is 0.4V when VIO has no power (or in uncertain situations).

6.5.17 Power down pin

Table 24. Power down pin

Pin name	Supply	No pad power state	Reset state	HW state	PwrDwn state	PwrDwn prog.	Internal PU/ PD	PU	PD
PDn	AVDD18	n/a	n/a	n/a	n/a	n/a	weak PD	n/a	n/a

Full Power-down (input) (active low)

0 = full power-down mode

1 = normal mode

- PDn can accept an input of 1.8V to 4.5V
- PDn may be driven by the host
- PDn must be high for normal operation

No internal pull-up on this pin.

This pin has an always-on internal weak pull-down.

6.5.18 Power supply and ground pins

Table 25. Power supply and ground pins

Pin name	Type	Description
VCORE	Power	1.05V core power supply
VIO	Power	1.8V/3.3V digital I/O power supply
VIO_RF	Power	1.8V/3.3V digital I/O RF power supply
AVDD18	Power	1.8V analog power supply
VPA	Power	PA power supply See Section 9 "Recommended operating conditions"
BUCK_VIN	Power	Internal buck voltage input See Section 9 "Recommended operating conditions"
BUCK_VOUT	Power	Internal buck voltage output See Internal buck connections in Section 7.1 .
BUCK_SENSE	Power	Internal buck voltage sense This pin senses the output voltage of the internal Buck. See internal buck connections in Section 7.1 .
VSS	Ground	Ground
DNC	DNC	Do Not Connect Do not connect these pins. Leave these pins floating.

6.5.19 JTAG interface

Table 26. JTAG interface pins (MFP)
Pins may be Multi-Functional Pins (MFP).

Pin name	Type	Supply	Description
JTAG_TDO	O	VIO	JTAG test data output signal - Muxed with GPIO[30]
JTAG_TDI	I	VIO	JTAG test data input signal - Muxed with GPIO[29]
JTAG_TMS	I	VIO	JTAG test mode select input signal - Muxed with GPIO[28]
JTAG_TCK	I	VIO	JTAG test clock input signal - Muxed with GPIO[27]

6.6 Configuration pins

[Table 27](#) shows the pins used as configuration inputs to set parameters following a reset. The definition of these pins changes immediately after reset to their usual function.

To set a configuration bit to 0, attach a 51 kΩ resistor from the pin to ground. No external circuitry is required to set a configuration bit to 1.

External circuitry that shares functionality with the configuration pins after a device reset must not pull the configuration pins to undesired values/states as this will change the post-reset behavior of the device.

Table 27. Configuration pins

Configuration bits	Pin name	Configuration function
CON[13]	GPIO[23]	Reserved. Do not connect.
CON[12]	GPIO[22]	Reserved. Do not connect.
CON[10]	GPIO[6]	Reserved. Do not connect.
CON[9]	GPIO[5]	Reserved. Do not connect.
CON[8]	GPIO[4]	Reserved. Do not connect.
CON[3]	GPIO[24]	Reserved. Do not connect.
CON[0]	CONFIG_HOST_BOOT[0]	Host configuration options Selects the host interface used for Wi-Fi and Bluetooth. See Table 28 .

Table 28. Host configuration options for IW693P


CONFIG_HOST_BOOT[0]	Wi-Fi	Bluetooth/ Bluetooth LE
0	PCIe	UART
1	reserved	reserved

7 Power information

7.1 Internal buck regulator

VCORE must be supplied by the internal buck regulator. The following figure shows the application circuit for VCORE supply using the internal Buck regulator. The power inductor in the application is chosen to maximize the internal Buck efficiency.

Note: In [Figure 20](#), Wireless SoC is IW693P.

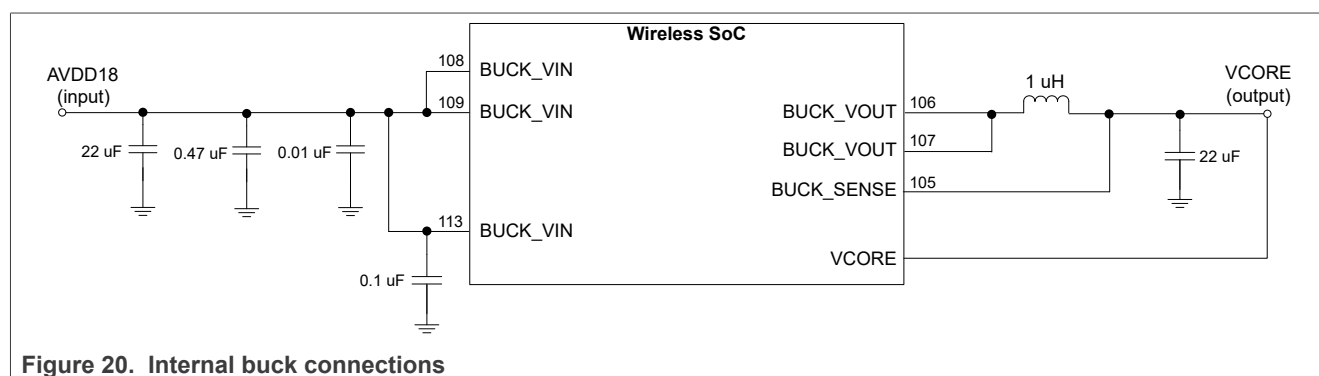

Deep-sleep mode

When the internal Buck is used to supply VCORE, the VCORE level can be reduced to approximately 0.8 V to reduce power consumption in deep sleep mode.

7.2 Power-up sequence

The IW693P does not have power-up sequence requirements. The power-down pin (PDn) must be held low (asserted) until all power supply rails are stable. The following figures and tables are recommendations.

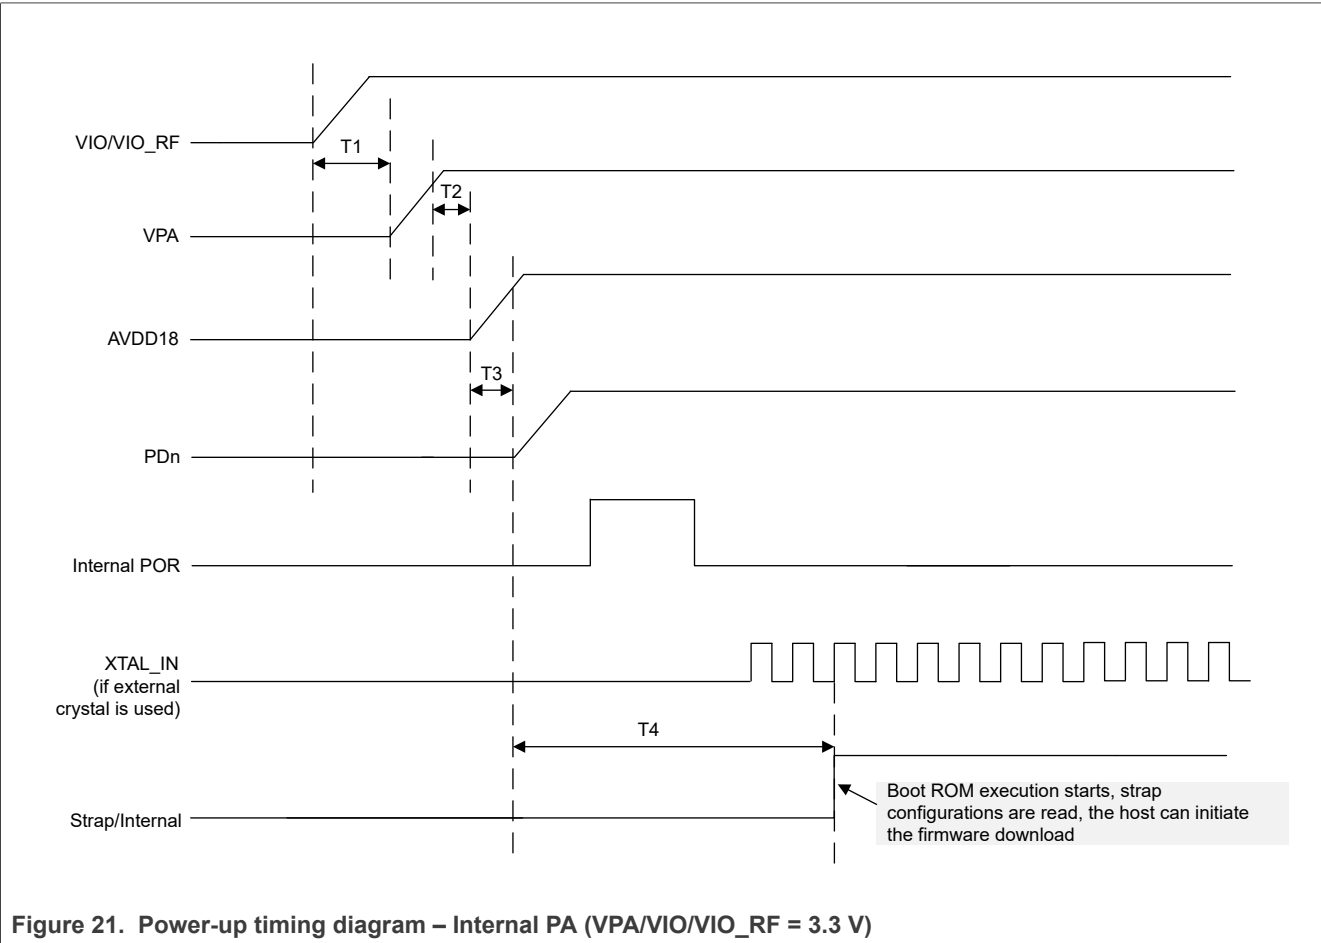


Table 29. Power-up timing parameters – Internal PA (VPA/VIO/VIO_RF = 3.3 V)^[1]

Symbol	Description	Min	Typ	Max	Unit
T1	Delay from start of VIO/VIO_RF ramp-up to start of VPA ramp-up	0	—	—	ms
T2	Delay from VPA high (at least 90%) to start of AVDD18 ramp-up	0	100	—	ms
T3	Delay from start of AVDD18 ramp-up to start of PDn ramp-up	0	—	—	ms
T4	Delay from AVDD18 high (90%) to start of Boot ROM	—	10	—	ms

[1] The ramp-up time of VIO/VIO_RF, VPA and AVDD18 must be less than 100 ms.
All supplies must be monotonic.
If using an external crystal oscillator, the reference clock must be stable before PDn ramps up.

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

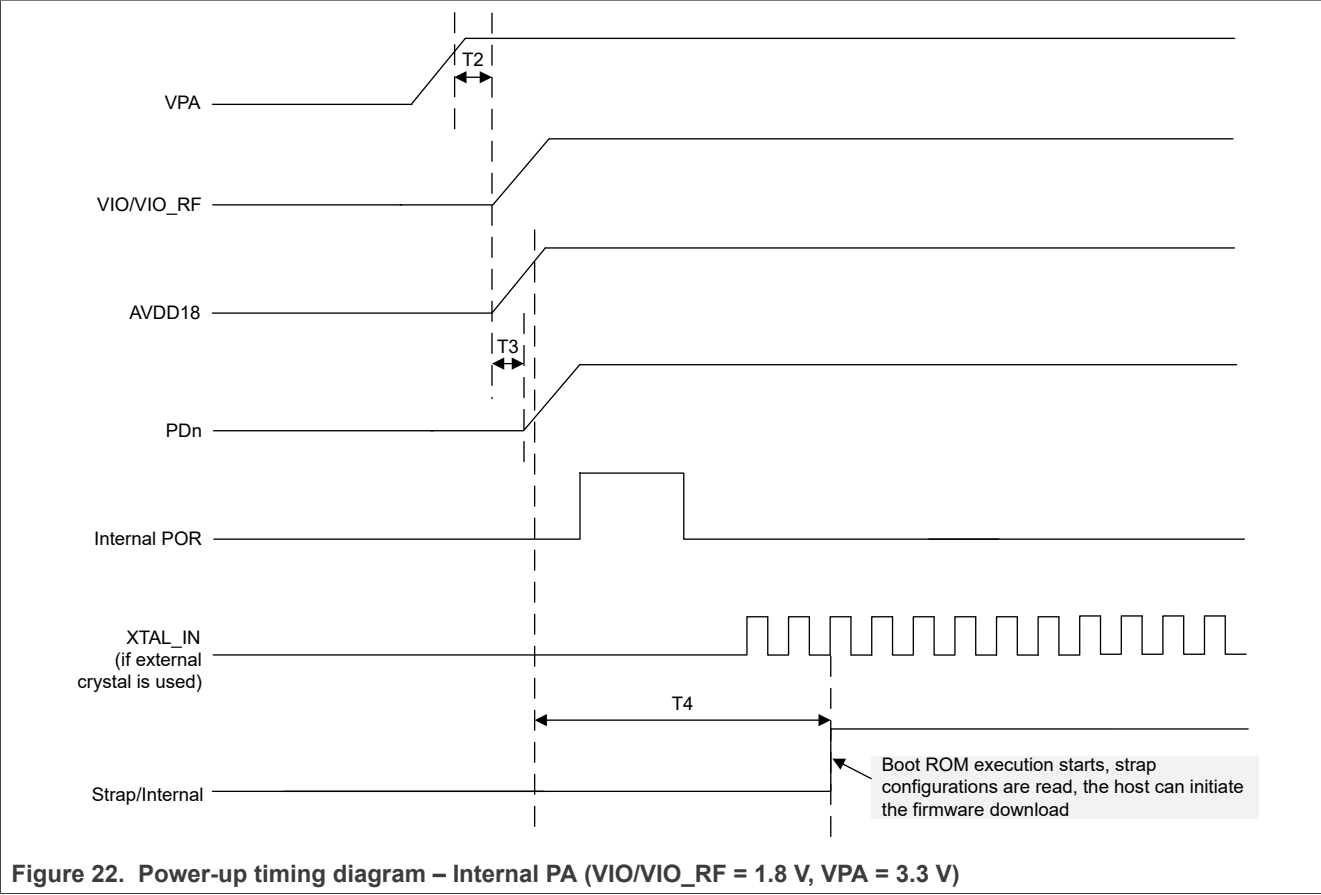


Table 30. Power-up timing parameters – Internal PA (VIO/VIO_RF = 1.8 V, VPA = 3.3 V)^[1]

Symbol	Description	Min	Typ	Max	Unit
T2	Delay from VPA high (at least 90%) to start of AVDD18 ramp-up	0	100	—	ms
T3	Delay from start of AVDD18 ramp-up to start of PDn ramp-up	0	—	—	ms
T4	Delay from AVDD18 high (90%) to start of Boot ROM	—	10	—	ms

[1] The ramp-up time of VIO/VIO_RF, VPA and AVDD18 must be less than 100 ms.
All supplies must be monotonic.
If using an external crystal oscillator, the reference clock must be stable before PDn ramps up.

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

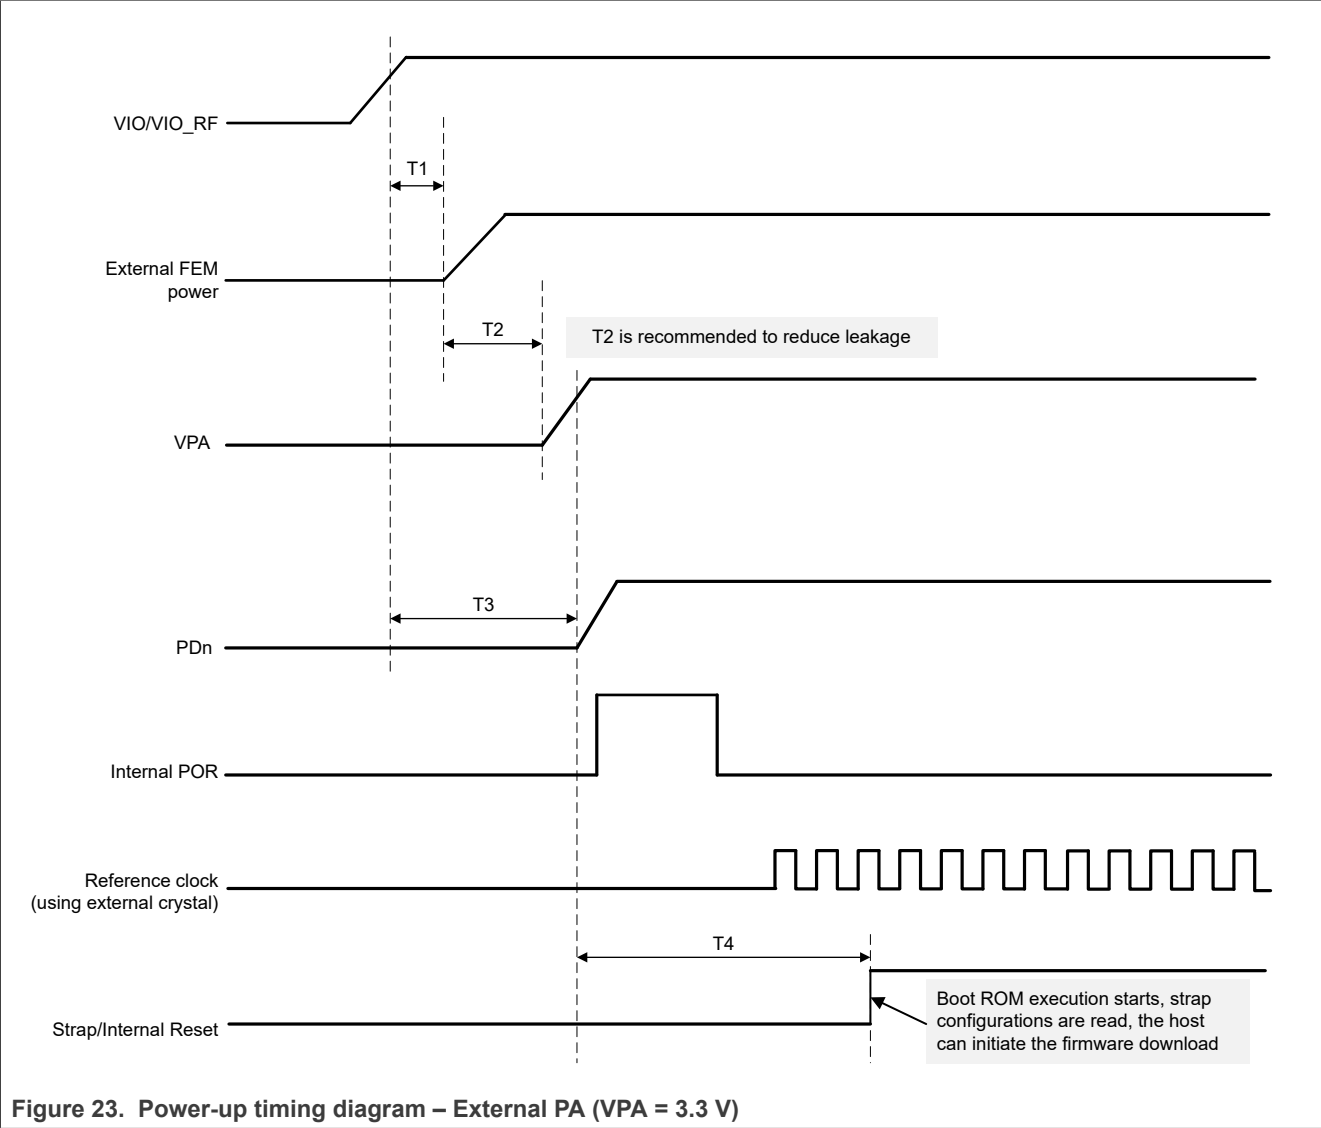


Table 31. Power-up timing parameters - External PA^[1]

Symbol	Description	Min	Typ	Max	Unit
T1	Delay from VIO/VIO_RF high (at least 90%) to start of External FEM power ramp-up	0	—	—	ms
T2	Delay from External FEM power ramp-up to start of VPA ramp-up	0	—	—	ms
T3	Delay from VIO/VIO_RF high (at least 90%) to start of PDn ramp-up	0	—	—	ms
T4	Delay from start of PDn ramp-up to start of Boot ROM	—	10	—	ms

[1] The ramp-up time of VIO/VIO_RF, VPA and AVDD18 must be less than 100 ms.
All supplies must be monotonic.
If using an external crystal oscillator, the reference clock must be stable before PDn ramps up.

7.3 Power-down sequence

PDn must be discharged to less than 0.2 V before Power-On Reset (POR) is triggered again.

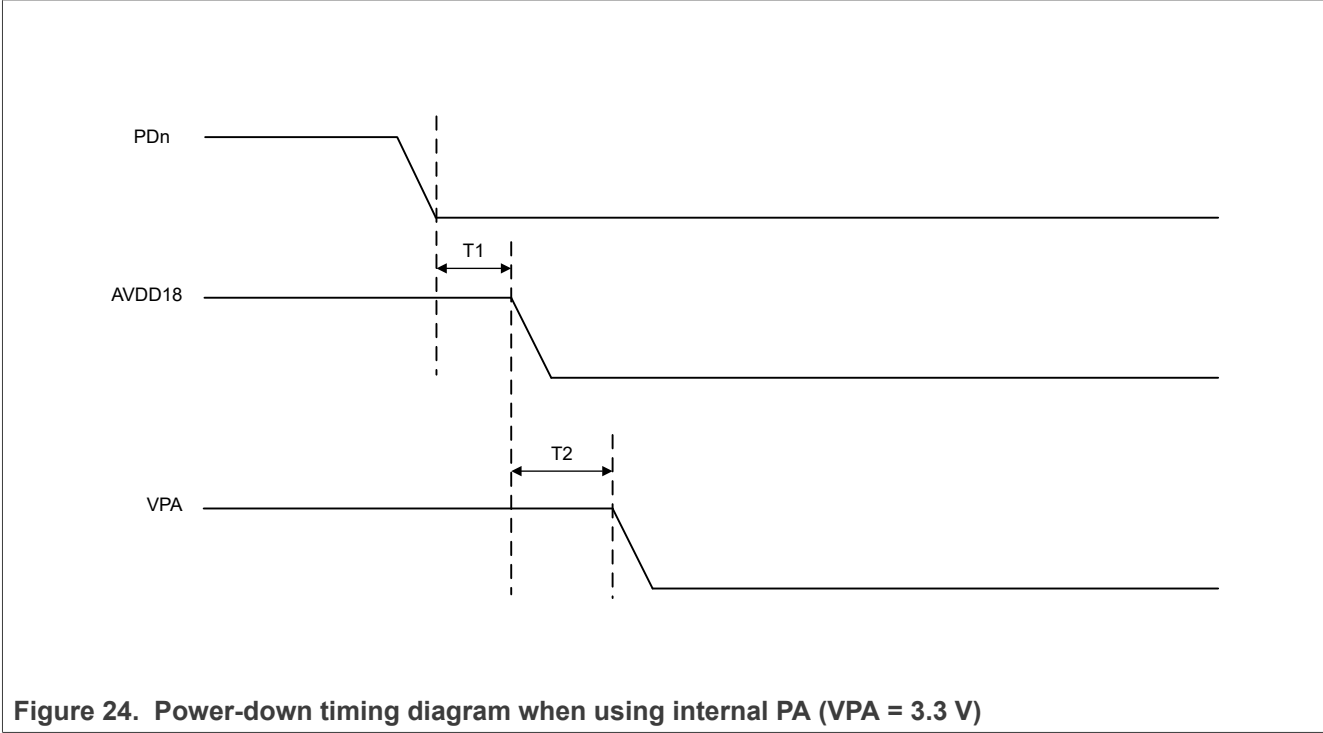


Table 32. Power-down timing parameters - when using internal PA

Symbol	Description	Min	Typ	Max	Units
T1	Recommended delay from PDn low (less than 0.2V) to start of AVDD18 ramp-down	0	—	—	ms
T2	Recommended delay from start of AVDD18 ramp-down to start of VPA ramp-down	0	—	—	ms

- One of the following conditions must be met before Power-On Reset (POR) is triggered again:
 - PDn is discharged to less than 0.2V
 - VCORE and PDn are discharged to less than 0.2V
 - AVDD18 and PDn are discharged to less than 0.2V
 - VCORE, AVDD18, and PDn are discharged to less than 0.2V

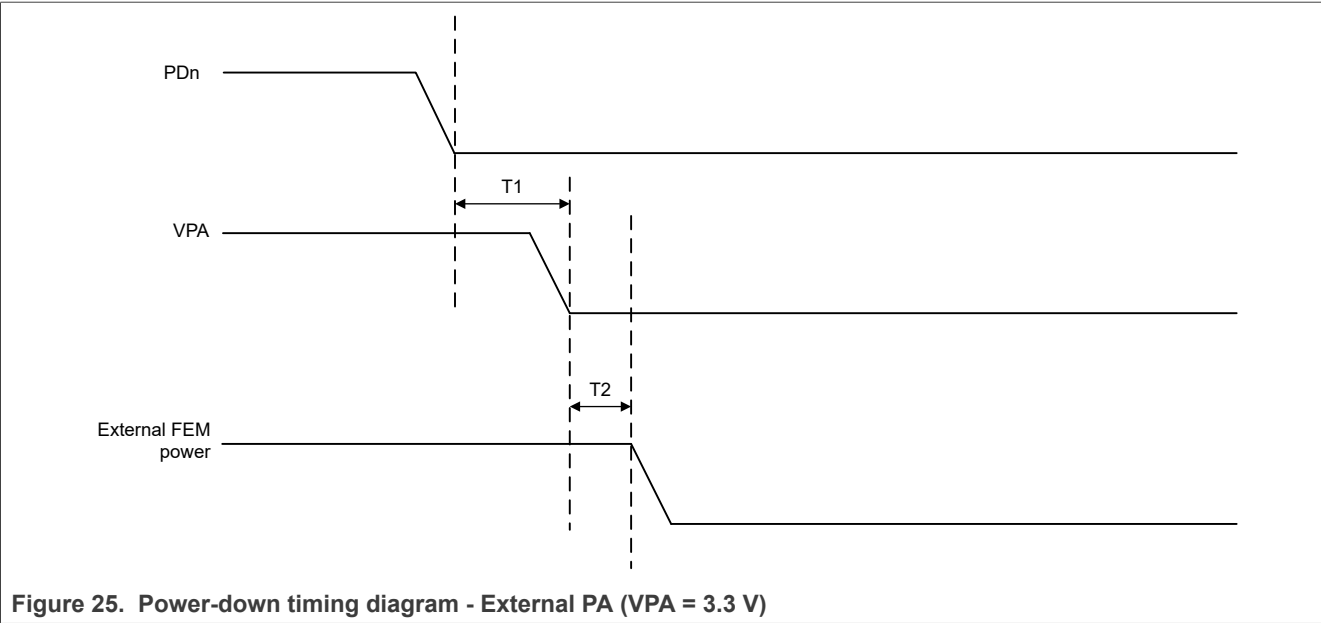


Table 33. Power-down timing parameters - External PA

Symbol	Description	Min	Typ	Max	Units
T1	Recommended delay from PDn low (less than 0.2V) to VPA low (less than 0.2V)	0	—	—	ms
T2	Delay from VPA low to start of external FEM power ramp-down	0	—	—	ms

7.4 Reset

The IW693P is reset to its default operating state under any of the following conditions:

- Internal Power-On Reset (POR): POR is triggered when the device receives power and V_{CORE} and AVDD18 supplies are good. See [Section 7.2](#).
- Software/Firmware reset: software/firmware issues a reset.
- External PDn pin assertion: the device is reset when the PDn input pin is <0.2V and transitions from low to high.

See [Section 11.9 "Power-down specifications"](#) for the electrical specifications.

Lowest power state

The device can be put into the lowest power mode of operation to conserve energy when Wi-Fi and Bluetooth are not in use.

To put the device in the lowest power mode, assert PDn low to enter power-down mode. Once PDn is de-asserted, the power sequence must be followed. If the firmware is not downloaded, the device must be kept in power-down mode to reduce leakage.

8 Absolute maximum ratings

CAUTION: The absolute maximum ratings table defines the limitation for electrical and thermal stresses. These limits prevent permanent damage to the device. Exposure to conditions at or beyond these ratings is not guaranteed and can damage the device.

Table 34. Absolute maximum ratings

Symbol	Parameter	Min	Max	Unit
VCORE ^[1]	1.05V core power supply	—	1.21	V
VIO	1.8V/3.3V digital I/O power supply	—	2.16	V
		—	3.96	V
VIO_RF	1.8V/3.3V I/O power supply	—	2.16	V
		—	3.96	V
AVDD18	1.8V analog power supply	—	2.16	V
VPA	3.3V analog power supply	—	3.96	V
BUCK_VIN	Buck input power supply	—	2.16	V
T _{STORAGE}	Storage temperature	-55	+125	°C

[1] VCORE must be powered from the internal buck as shown in the figure in [Section 7.1](#).

Table 35. Limiting values

Symbol	Parameter ^[1]	Condition	Min	Max	Unit
V _{ESD}	Electrostatic discharge	human body model (HBM)	-2	+2	kV
		charged device model (CDM)— all pins except pins number 30 and 82	-500	+500	V
		charged device model (CDM) – Pin number 30 (AVDD18) and pin number 82 (AVDD18)	-400	+400	V
		charged device model (CDM) – corner pins	-750	+750	V

[1] HBM values according to AEC-Q100-002.
CDM values according to AEC-Q100-011.

9 Recommended operating conditions

Operation beyond the recommended operating conditions is neither recommended nor guaranteed.

Table 36. Recommended operating conditions

Symbol	Parameter	Condition	Min	Typ	Max	Unit
VCORE ^[1]	1.05V core power supply	—	1.025	—	1.155	V
VIO	1.8V/3.3V digital I/O power supply	—	1.71	1.8	1.89	V
			3.14	3.3	3.46	V
VIO_RF	1.8V/3.3V I/O power supply	—	1.71	1.8	1.89	V
			3.14	3.3	3.46	V
AVDD18	1.8V analog power supply	—	1.71	1.8	1.89	V
VPA	3.3V analog power supply	—	3.14	3.3	3.46	V
BUCK_VIN	Buck input power supply	—	1.71	1.8	1.89	V
T _A	Ambient operating temperature	Industrial	-40	—	85	°C
T _J	Maximum junction temperature	—	—	—	125	°C

[1] VCORE must be powered from the internal Buck as shown in the figure in [Section 7.1](#).


10 Radio specifications

10.1 Wi-Fi radio specifications

10.1.1 Wi-Fi radio performance measurement

The Wi-Fi transmit/receive performance is measured either at the antenna port or at the chip port with Wi-Fi radio interface pins.

Note: In [Figure 26](#), Wireless SoC is IW693P.

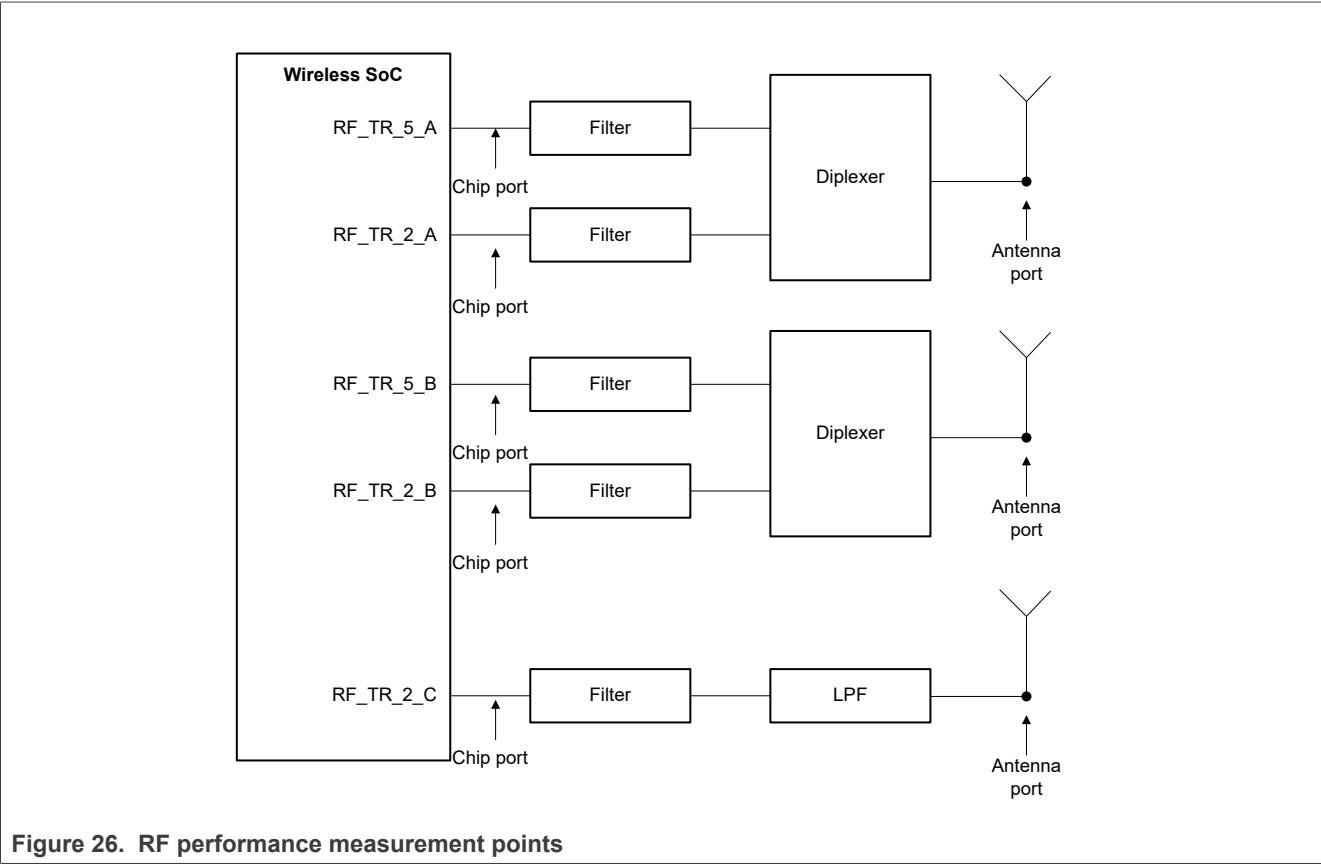

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

10.1.2 2.4 GHz Wi-Fi receiver performance - 2A/2B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_2_A/RF_TR_2_B pin.

Table 37. 2.4 GHz Wi-Fi receiver performance – 2A/2B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	2.4 GHz	2400	—	2483	MHz
Receiver sensitivity SISO, NRx = 1, Nss = 1					
Receiver sensitivity (1 x 1)	802.11b, 20MHz, 1 Mbps	—	-99.75	—	dBm
Receiver sensitivity (1 x 1)	802.11b, 20 MHz, 11 Mbps	—	-91.75	—	dBm
Receiver sensitivity (1 x 1)	802.11g, 20 MHz, 6 Mbps	—	-95.25	—	dBm
Receiver sensitivity (1 x 1)	802.11g, 20 MHz, 54 Mbps	—	-78.00	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 20 MHz, MCS0 Nss1 BCC	—	-93.75	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 20 MHz, MCS7 Nss1 BCC	—	-74.50	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 40 MHz, MCS0 Nss1 BCC	—	-91.25	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 40 MHz, MCS7 Nss1 BCC	—	-72.25	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	-94.75	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS7 Nss1 LDPC	—	-77.00	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	-73.00	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	-91.50	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 40 MHz, MCS7 Nss1 LDPC	—	-74.50	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	-68.75	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x + 3.2	—	-94.50	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x + 3.2	—	-64.75	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 40 MHz, MCS0 Nss1 LDPC4x + 3.2	—	-91.75	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 40 MHz, MCS11 Nss1 LDPC4x + 3.2	—	-62.50	—	dBm
Receiver sensitivity MIMO, NRx = 2, Nss = 1					
Receiver sensitivity (1 x 2)	802.11b, 20 MHz, 1 Mbps	—	-103.25	—	dBm
Receiver sensitivity (1 x 2)	802.11b, 20 MHz, 11 Mbps	—	-92.25	—	dBm
Receiver sensitivity (1 x 2)	802.11g, 20 MHz, 6 Mbps	—	-95.50	—	dBm
Receiver sensitivity (1 x 2)	802.11g, 20 MHz, 54 Mbps	—	-81.50	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 20 MHz, MCS0 Nss1 BCC	—	-95.50	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 20 MHz, MCS7 Nss1 BCC	—	-78.00	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 40 MHz, MCS0 Nss1 BCC	—	-92.00	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 40 MHz, MCS7 Nss1 BCC	—	-75.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	-95.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS7 Nss1 LDPC	—	-80.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	-76.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	-92.00	—	dBm

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 37. 2.4 GHz Wi-Fi receiver performance – 2A/2B RF paths...continued

Parameter	Condition	Min	Typ	Max	Unit
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS7 Nss1 LDPC	—	-77.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	-72.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x + 3.2	—	-95.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x + 3.2	—	-68.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS0 Nss1 LDPC4x + 3.2	—	-91.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS11 Nss1 LDPC4x + 3.2	—	-66.25	—	dBm
Receiver maximum input level (MIL) - SISO, NRx = 1, Nss = 1					
Receiver maximum input level DSSS	802.11b DSSS MIL	—	-3.40	—	dBm
Receiver maximum input level CCK	802.11b CCK MIL	—	-3.40	—	dBm
Receiver maximum input level OFDM	OFDM MIL	—	-12.90	—	dBm
Receiver adjacent channel interference (ACI) - NRx = 1, Nss = 1					
Receiver ACI	802.11b, 20 MHz, 1 Mbps	—	53.00	—	dB
Receiver ACI	802.11b, 20 MHz, 11 Mbps	—	45.50	—	dB
Receiver ACI	802.11g, 20 MHz, 6 Mbps	—	31.00	—	dB
Receiver ACI	802.11g, 20 MHz, 54 Mbps	—	21.25	—	dB
Receiver ACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	38.00	—	dB
Receiver ACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	25.50	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.00	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	3.75	—	dB
Receiver alternative adjacent channel interference (AACI) - NRx = 1, Nss = 1					
Receiver AACI	802.11b, 20 MHz, 1 Mbps	—	53.00	—	dB
Receiver AACI	802.11b, 20 MHz, 11 Mbps	—	49.00	—	dB
Receiver AACI	802.11g, 20 MHz, 6 Mbps	—	46.25	—	dB
Receiver AACI	802.11g, 20 MHz, 54 Mbps	—	33.00	—	dB
Receiver AACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	49.00	—	dB
Receiver AACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	31.25	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	47.25	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	20.50	—	dB

10.1.3 2.4 GHz Wi-Fi receiver performance – 2C RF path

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_2_C pin.

Table 38. 2.4 GHz Wi-Fi receiver performance – 2C RF path

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	2.4 GHz	2400	—	2483	MHz
Receiver sensitivity SISO, NRx = 1, Nss = 1					
Receiver sensitivity (1 x 1)	802.11b, 20 MHz, 1 Mbps	—	-99.50	—	dBm
Receiver sensitivity (1 x 1)	802.11b, 20 MHz, 11 Mbps	—	-91.25	—	dBm
Receiver sensitivity (1 x 1)	802.11g, 20 MHz, 6 Mbps	—	-95.25	—	dBm
Receiver sensitivity (1 x 1)	802.11g, 20 MHz, 54 Mbps	—	-77.50	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 20 MHz, MCS0 Nss1 BCC	—	-94.00	—	dBm
Receiver sensitivity (1 x 1)	802.11n, 20 MHz, MCS7 Nss1 BCC	—	-75.00	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	-94.50	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS7 Nss1 LDPC	—	-77.50	—	dBm
Receiver sensitivity (1 x 1)	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	-73.75	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x + 3.2	—	-95.25	—	dBm
Receiver sensitivity (1 x 1)	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x + 3.2	—	-65.25	—	dBm
Receiver maximum input level (MIL) - SISO, NRx = 1, Nss = 1					
Receiver maximum input level DSSS	802.11b DSSS MIL	—	-3.44	—	dBm
Receiver maximum input level CCK	802.11b CCK MIL	—	-3.44	—	dBm
Receiver maximum input level OFDM	OFDM MIL	—	-8.44	—	dBm
Receiver adjacent channel interference (ACI) - NRx = 1, Nss = 1					
Receiver ACI	802.11b, 20 MHz, 1 Mbps	—	53.00	—	dB
Receiver ACI	802.11b, 20 MHz, 11 Mbps	—	47.50	—	dB
Receiver ACI	802.11g, 20 MHz, 6 Mbps	—	31.00	—	dB
Receiver ACI	802.11g, 20 MHz, 54 Mbps	—	21.50	—	dB
Receiver ACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	37.50	—	dB
Receiver ACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	25.00	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.50	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	4.50	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 38. 2.4 GHz Wi-Fi receiver performance – 2C RF path...continued

Parameter	Condition	Min	Typ	Max	Unit
Receiver alternative adjacent channel interference (AACI) - NRx = 1, Nss = 1					
Receiver AACI	802.11b, 20 MHz, 1 Mbps	—	53.00	—	dB
Receiver AACI	802.11b, 20 MHz, 11 Mbps	—	49.00	—	dB
Receiver AACI	802.11g, 20 MHz, 6 Mbps	—	47.50	—	dB
Receiver AACI	802.11g, 20 MHz, 54 Mbps	—	34.00	—	dB
Receiver AACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	50.50	—	dB
Receiver AACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	32.00	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	47.50	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	22.00	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

10.1.4 5 GHz Wi-Fi receiver performance - 5A/5B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_5_A/RF_TR_5_B pin.

Table 39. 5 GHz Wi-Fi receiver performance - 5A/5B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	5 GHz	5180	—	5885	MHz
Receiver sensitivity SISO, NRx = 1, Nss = 1					
Receiver sensitivity (1x1)	802.11a, 20 MHz, 6 Mbps	—	-93.75	—	dBm
Receiver sensitivity (1x1)	802.11a, 20 MHz, 54 Mbps	—	-77.50	—	dBm
Receiver sensitivity (1x1)	802.11n, 20 MHz, MCS0 Nss1 BCC	—	-93.25	—	dBm
Receiver sensitivity (1x1)	802.11n, 20 MHz, MCS7 Nss1 BCC	—	-74.00	—	dBm
Receiver sensitivity (1x1)	802.11n, 40 MHz, MCS0 Nss1 BCC	—	-90.25	—	dBm
Receiver sensitivity (1x1)	802.11n, 40 MHz, MCS7 Nss1 BCC	—	-71.75	—	dBm
Receiver sensitivity (1x1)	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	-93.50	—	dBm
Receiver sensitivity (1x1)	802.11ac, 20 MHz, MCS7 Nss1 LDPC	—	-76.50	—	dBm
Receiver sensitivity (1x1)	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	-72.50	—	dBm
Receiver sensitivity (1x1)	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	-90.25	—	dBm
Receiver sensitivity (1x1)	802.11ac, 40 MHz, MCS7 Nss1 LDPC	—	-73.75	—	dBm
Receiver sensitivity (1x1)	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	-68.25	—	dBm
Receiver sensitivity (1x1)	802.11ac, 80 MHz, MCS0 Nss1 LDPC	—	-87.00	—	dBm
Receiver sensitivity (1x1)	802.11ac, 80 MHz, MCS7 Nss1 LDPC	—	-71.00	—	dBm
Receiver sensitivity (1x1)	802.11ac, 80 MHz, MCS9 Nss1 LDPC	—	-65.25	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-93.50	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-70.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-64.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-90.25	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-67.75	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-62.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-86.75	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-64.75	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-59.00	—	dBm

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 39. 5 GHz Wi-Fi receiver performance - 5A/5B RF paths...continued

Parameter	Condition	Min	Typ	Max	Unit
Receiver sensitivity MIMO, NRx = 2, Nss = 1					
Receiver sensitivity (1 x 2)	802.11a, 20 MHz, 6 Mbps	—	-94.75	—	dBm
Receiver sensitivity (1 x 2)	802.11a, 20 MHz, 54 Mbps	—	-80.50	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 20 MHz, MCS0 Nss1 BCC	—	-94.75	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 20 MHz, MCS7 Nss1 BCC	—	-77.00	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 40 MHz, MCS0 Nss1 BCC	—	-91.50	—	dBm
Receiver sensitivity (1 x 2)	802.11n, 40 MHz, MCS7 Nss1 BCC	—	-74.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	-94.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS7 Nss1 LDPC	—	-79.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	-75.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	-91.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS7 Nss1 LDPC	—	-76.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	-71.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 80 MHz, MCS0 Nss1 LDPC	—	-88.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 80 MHz, MCS7 Nss1 LDPC	—	-73.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ac, 80 MHz, MCS9 Nss1 LDPC	—	-68.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-94.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-73.00	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-67.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-91.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-71.00	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-65.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-87.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-67.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-62.00	—	dBm
Receiver adjacent channel interference (ACI) - NRx = 1, Nss = 1					
Receiver ACI	802.11a, 20 MHz, 6 Mbps	—	23.00	—	dB
Receiver ACI	802.11a, 20 MHz, 54 Mbps	—	15.00	—	dB
Receiver ACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	26.50	—	dB
Receiver ACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	9.75	—	dB
Receiver ACI	802.11n, 40 MHz, MCS0 Nss1 BCC	—	27.50	—	dB
Receiver ACI	802.11n, 40 MHz, MCS7 Nss1 BCC	—	13.00	—	dB
Receiver ACI	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	27.00	—	dB
Receiver ACI	802.11ac, 20 MHz, MCS9 Nss1 LDPC	—	15.00	—	dB
Receiver ACI	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	26.75	—	dB
Receiver ACI	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	10.00	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 39. 5 GHz Wi-Fi receiver performance - 5A/5B RF paths...continued

Parameter	Condition	Min	Typ	Max	Unit
Receiver ACI	802.11ac, 80 MHz, MCS0 Nss1 LDPC	—	24.50	—	dB
Receiver ACI	802.11ac, 80 MHz, MCS9 Nss1 LDPC	—	13.00	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.50	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	12.25	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	6.50	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.00	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	13.75	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	8.75	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	24.50	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	14.50	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	8.00	—	dB
Receiver alternative adjacent channel interference (AACI) - NRx = 1, Nss = 1					
Receiver AACI	802.11a, 20 MHz, 6 Mbps	—	45.25	—	dB
Receiver AACI	802.11a, 20 MHz, 54 Mbps	—	27.00	—	dB
Receiver AACI	802.11n, 20 MHz, MCS0 Nss1 BCC	—	45.00	—	dB
Receiver AACI	802.11n, 20 MHz, MCS7 Nss1 BCC	—	30.00	—	dB
Receiver AACI	802.11n, 40 MHz, MCS0 Nss1 BCC	—	43.00	—	dB
Receiver AACI	802.11n, 40 MHz, MCS7 Nss1 BCC	—	27.50	—	dB
Receiver AACI	802.11ac, 20 MHz, MCS0 Nss1 LDPC	—	45.25	—	dB
Receiver AACI	802.11ac, 20 MHz, MCS9 Nss1 LDPC	—	26.75	—	dB
Receiver AACI	802.11ac, 40 MHz, MCS0 Nss1 LDPC	—	43.00	—	dB
Receiver AACI	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	22.25	—	dB
Receiver AACI	802.11ac, 80 MHz, MCS0 Nss1 LDPC	—	42.75	—	dB
Receiver AACI	802.11ac, 80 MHz, MCS9 Nss1 LDPC	—	21.75	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	45.00	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	25.75	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	19.25	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	44.25	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	23.25	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	16.25	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	44.50	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	24.75	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	17.50	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

10.1.5 6 GHz Wi-Fi receiver performance – 5A/5B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_5_A/RF_TR_5_B pin.

Table 40. 6 GHz Wi-Fi receiver performance – 5A/5B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	6 GHz	5925	—	7125	MHz
Receiver sensitivity SISO, NRx = 1, Nss = 1					
Receiver sensitivity (1x1)	802.11a, 20 MHz, 6 Mbps	—	-93.50	—	dBm
Receiver sensitivity (1x1)	802.11a, 20 MHz, 54 Mbps	—	-77.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-93.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-69.50	—	dBm
Receiver sensitivity (1x1)	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-63.75	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-90.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-67.75	—	dBm
Receiver sensitivity (1x1)	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-62.00	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-86.25	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-64.50	—	dBm
Receiver sensitivity (1x1)	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-58.75	—	dBm
Receiver sensitivity MIMO, NRx = 2, Nss = 1					
Receiver sensitivity (1 x 2)	802.11a, 20 MHz, 6 Mbps	—	-94.75	—	dBm
Receiver sensitivity (1 x 2)	802.11a, 20 MHz, 54 Mbps	—	-80.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-94.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-72.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-67.00	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-91.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-71.00	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-65.25	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	-87.50	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	-67.75	—	dBm
Receiver sensitivity (1 x 2)	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	-62.00	—	dBm

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 40. 6 GHz Wi-Fi receiver performance – 5A/5B RF paths...continued

Parameter	Condition	Min	Typ	Max	Unit
Receiver adjacent channel interference (ACI) - NRx = 1, Nss = 1					
Receiver ACI	802.11a, 20 MHz, 6 Mbps	—	27.00	—	dB
Receiver ACI	802.11a, 20 MHz, 54 Mbps	—	15.25	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.50	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	11.25	—	dB
Receiver ACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	6.50	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	27.00	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	13.75	—	dB
Receiver ACI	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	8.25	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	23.50	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	11.00	—	dB
Receiver ACI	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	6.50	—	dB
Receiver alternative adjacent channel interference (AACI) - NRx = 1, Nss = 1					
Receiver AACI	802.11a, 20 MHz, 6 Mbps	—	40.50	—	dB
Receiver AACI	802.11a, 20 MHz, 54 Mbps	—	26.50	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS0 Nss1 LDPC 4x+3.2	—	44.50	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS9 Nss1 LDPC 4x+3.2	—	25.00	—	dB
Receiver AACI	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	19.75	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS0 Nss1 LDPC 4x+3.2	—	43.50	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS9 Nss1 LDPC 4x+3.2	—	22.25	—	dB
Receiver AACI	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	16.75	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS0 Nss1 LDPC 4x+3.2	—	42.50	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS9 Nss1 LDPC 4x+3.2	—	23.50	—	dB
Receiver AACI	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	17.25	—	dB

10.1.6 2.4 GHz Wi-Fi transmitter performance – 2A/2B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_2_A/RF_TR_2_B pin.

Table 41. 2.4 GHz Wi-Fi transmitter performance – 2A/2B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	2.4 GHz	2400	—	2483	MHz
Transmit power					
Transmit power EVM and Mask Limited	802.11b, 20 MHz, 1 Mbps	—	22.00	—	dBm
Transmit power EVM and Mask Limited	802.11b, 20 MHz, 11 Mbps	—	22.00	—	dBm
Transmit power EVM and Mask Limited	802.11g, 20 MHz, 54 Mbps	—	20.30	—	dBm
Transmit power EVM and Mask Limited	802.11n, 20 MHz, MCS7 Nss1 BCC	—	20.30	—	dBm
Transmit power EVM and Mask Limited	802.11n, 40 MHz, MCS7 Nss1 BCC	—	20.30	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	19.30	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	19.30	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	18.30	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 40 MHz, MCS11 Nss1 LDPC4x+3.2	—	18.30	—	dBm
Transmit carrier suppression					
Transmit carrier suppression	802.11ax MCS11	—	40.00	—	dBc
Transmit output power					
Transmit output power control step		—	1.00	—	dB
Transmit output power level control range		—	0 – 22	—	dBm
Transmit output power accuracy	With manufacturing time per board calibration	-1.6	—	1.6	dBm
Transmit frequency error					
Transmit frequency error	802.11ax MCS11 With manufacturing time per board calibration	—	8.00	—	ppm
Transmit harmonics and sub harmonics ^[1]					
Transmit general spurs, harmonics, and sub-harmonics (1 Mbps TX at 18 dBm with 100% duty cycle)	< 1GHz	—	-77.00	—	dBm/100 kHz
	1 GHz to 12 GHz	—	-49.00	—	dBm/100 kHz
	2nd Harmonic	—	-47.00	—	dBm/1 MHz
	3rd Harmonic	—	-60.00	—	dBm/1 MHz
	LO leakage (2.4 GHz, MCS11)	—	-40.00	—	dBm

[1] Spurious and harmonics are measured with the front-end configuration of the reference design.

10.1.7 2.4 GHz Wi-Fi transmitter performance – 2C RF path

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_2_C pin.

Table 42. 2.4 GHz Wi-Fi transmitter performance – 2A/2B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	2.4 GHz	2400	—	2483	MHz
Transmit power					
Transmit power EVM and Mask Limited	802.11b, 20 MHz, 1 Mbps	—	22.00	—	dBm
Transmit power EVM and Mask Limited	802.11b, 20 MHz, 11 Mbps	—	22.00	—	dBm
Transmit power EVM and Mask Limited	802.11g, 20 MHz, 54 Mbps	—	20.30	—	dBm
Transmit power EVM and Mask Limited	802.11n, 20 MHz, MCS7 Nss1 BCC	—	19.90	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	19.40	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 20 MHz, MCS11 Nss1 LDPC4x+3.2	—	17.90	—	dBm
Transmit carrier suppression					
Transmit carrier suppression	802.11ax MCS11	—	37.00	—	dBc
Transmit output power					
Transmit output power control step		—	1.00	—	dB
Transmit output power level control range		—	0 – 22	—	dBm
Transmit output power accuracy	With manufacturing time per board calibration	-1.6	—	1.6	dBm
Transmit frequency error					
Transmit frequency error	802.11ax MCS11 With manufacturing time per board calibration	—	8.00	—	ppm
Transmit harmonics and sub harmonics ^[1]					
Transmit general spurs, harmonics, and sub-harmonics (1 Mbps TX at 18 dBm with 100% duty cycle)	< 1GHz	—	-78.00	—	dBm/100 kHz
	1 GHz to 12 GHz	—	-60.00	—	dBm/100 kHz
	2nd Harmonic	—	-48.00	—	dBm/1 MHz
	3rd Harmonic	—	-63.00	—	dBm/1 MHz
	LO leakage (2.4 GHz, MCS11)	—	-37.00	—	dBm

[1] Spurious and harmonics are measured with the front-end configuration of the reference design.

10.1.8 5 GHz Wi-Fi transmitter performance – 5A/5B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_5_A/RF_TR_5_B pin.

Table 43. 5 GHz Wi-Fi transmitter performance – 5A/5B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	5 GHz	5180	—	5885	MHz
Transmit power					
Transmit power EVM and Mask Limited	802.11a, 20 MHz, 54 Mbps	—	20.70	—	dBm
Transmit power EVM and Mask Limited	802.11n, 20 MHz, MCS7 Nss1 BCC	—	19.70	—	dBm
Transmit power EVM and Mask Limited	802.11n, 40 MHz, MCS7 Nss1 BCC	—	19.70	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 20 MHz, MCS8 Nss1 LDPC	—	18.70	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 40 MHz, MCS9 Nss1 LDPC	—	18.20	—	dBm
Transmit power EVM and Mask Limited	802.11ac, 80 MHz, MCS9 Nss1 LDPC	—	18.20	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	16.70	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	17.20	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	16.70	—	dBm
Transmit carrier suppression					
Transmit carrier suppression	802.11ax MCS11	—	34.00	—	dBc
Transmit output power					
Transmit output power control step		—	1.00	—	dB
Transmit output power level control range		—	0 – 22	—	dBm
Transmit output power accuracy	With manufacturing time per board calibration	-1.6	—	1.6	dBm
Transmit frequency error					
Transmit frequency error	802.11ax MCS11 With manufacturing time per board calibration	—	8.00	—	ppm
Transmit harmonics and sub harmonics ^[1]					
Transmit general spurs, harmonics, and sub-harmonics (6 Mbps TX at 18 dBm with 100% duty cycle)	< 1GHz	—	-78.00	—	dBm/100 kHz
	1 GHz to 12 GHz	—	-62.00	—	dBm/100 kHz
	2nd Harmonic	—	-57.00	—	dBm/1 MHz
	3rd Harmonic	—	-62.00	—	dBm/1 MHz
	LO leakage (5 GHz, MCS11)	—	-34.00	—	dBm

[1] Spurious and harmonics are measured with the front-end configuration of the reference design.

10.1.9 6 GHz Wi-Fi transmitter performance – 5A/5B RF paths

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at RF_TR_5_A/RF_TR_5_B pin.

Table 44. 6 GHz Wi-Fi transmitter performance – 5A/5B RF paths

Parameter	Condition	Min	Typ	Max	Unit
RF frequency range	6 GHz	5925	—	7125	MHz
Transmit power					
Transmit power EVM and Mask Limited	802.11a, 20 MHz, 54 Mbps	—	20.00	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 20 MHz, MCS11 Nss1 LDPC 4x+3.2	—	17.50	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 40 MHz, MCS11 Nss1 LDPC 4x+3.2	—	17.00	—	dBm
Transmit power EVM and Mask Limited	802.11ax, 80 MHz, MCS11 Nss1 LDPC 4x+3.2	—	16.50	—	dBm
Transmit carrier suppression					
Transmit carrier suppression	802.11ax MCS11	—	36.00	—	dBc
Transmit output power					
Transmit output power control step		—	1.00	—	dB
Transmit output power level control range		—	0 – 22	—	dBm
Transmit output power accuracy	With manufacturing time per board calibration	-1.6	—	1.6	dBm
Transmit frequency error					
Transmit frequency error	802.11ax MCS11 With manufacturing time per board calibration	—	8.00	—	ppm
Transmit harmonics and sub harmonics ^[1]					
Transmit general spurs, harmonics, and sub-harmonics (6 Mbps TX at 18 dBm with 100% duty cycle)	< 1GHz	—	-78.00	—	dBm/100 kHz
	1 GHz to 12 GHz	—	-62.00	—	dBm/100 kHz
	2nd Harmonic	—	-54.00	—	dBm/1 MHz
	3rd Harmonic	—	-51.00	—	dBm/1 MHz
	LO leakage (6 GHz, MCS11)	—	-36.00	—	dBm

[1] Spurious and harmonics are measured with the front-end configuration of the reference design.

10.2 Bluetooth radio specifications

10.2.1 Bluetooth/Bluetooth LE receiver performance

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at BRF_ANT pin.

Table 45. Bluetooth/Bluetooth LE receiver performance

Bluetooth/Bluetooth LE receiver refers to Dirty TX. That is, the transmitter has impairments as specified by the Bluetooth SIG standard.

Parameter	Conditions	Min	Typ.	Max	Unit
Frequency range	—	2400	—	2483	MHz
RSSI accuracy					
RSSI accuracy		-3	—	3	dB
RSSI readback resolution		—	1.00	—	dB
Regulatory					
Transmit power		—	12.90	—	dBm
Receiver sensitivity					
BDR 1 Mbps	Dirty TX ON	—	-97.90	—	dBm
EDR 2 Mbps	Dirty TX ON	—	-97.00	—	dBm
EDR 3 Mbps	Dirty TX ON	—	-90.90	—	dBm
Bluetooth LE 1 Mbps	Dirty TX ON	—	-100.00	—	dBm
Bluetooth LE 2 Mbps	Dirty Tx ON	—	-97.50	—	dBm
Bluetooth LR 125 Kbps	Dirty Tx ON	—	-101.40	—	dBm
Bluetooth LR 500 Kbps	Dirty Tx ON	—	-108.30	—	dBm
Receiver maximum input level (MIL)					
BDR 1 Mbps	Dirty Tx OFF	—	-3.00	—	dBm
EDR 2 Mbps	Dirty Tx OFF	—	-6.00	—	dBm
EDR 3 Mbps	Dirty Tx OFF	—	-6.00	—	dBm
Bluetooth LE 1 Mbps	Dirty Tx OFF	—	-3.00	—	dBm
Bluetooth LE 2 Mbps	Dirty Tx OFF	—	-3.00	—	dBm
Bluetooth LR 125 Kbps	Dirty Tx OFF	—	-3.00	—	dBm
Bluetooth LR 500 Kbps	Dirty Tx OFF	—	-3.00	—	dBm
Receiver interference/selectivity performance^[1]					
BDR 1 Mbps					
Receiver ACI @ -5 MHz (image - 1)	BDR	—	-50.50	—	dB
Receiver ACI @ -4 MHz (image)	BDR	—	-30.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	BDR	—	-40.00	—	dB
Receiver ACI @ -2 MHz	BDR	—	-46.50	—	dB
Receiver ACI @ -1 MHz	BDR	—	-10.00	—	dB
Receiver CCI	BDR	—	10.00	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 45. Bluetooth/Bluetooth LE receiver performance ...continued

Bluetooth/Bluetooth LE receiver refers to Dirty TX. That is, the transmitter has impairments as specified by the Bluetooth SIG standard.

Parameter	Conditions	Min	Typ.	Max	Unit
Receiver ACI @ +1 MHz	BDR	—	-10.00	—	dB
Receiver ACI @ +2 MHz	BDR	—	-46.00	—	dB
Receiver ACI @ +3 MHz	BDR	—	-50.50	—	dB
EDR 2 Mbps					
Receiver ACI @ -5 MHz (image - 1)	EDR 2 Mbps	—	-50.00	—	dB
Receiver ACI @ -4 MHz (image)	EDR 2 Mbps	—	-30.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	EDR 2 Mbps	—	-39.50	—	dB
Receiver ACI @ -2 MHz	EDR 2 Mbps	—	-46.00	—	dB
Receiver ACI @ -1 MHz	EDR 2 Mbps	—	-10.00	—	dB
Receiver CCI	EDR 2 Mbps	—	10.00	—	dB
Receiver ACI @ +1 MHz	EDR 2 Mbps	—	-10.00	—	dB
Receiver ACI @ +2 MHz	EDR 2 Mbps	—	-47.00	—	dB
Receiver ACI @ +3 MHz	EDR 2 Mbps	—	-51.50	—	dB
EDR 3 Mbps					
Receiver ACI @ -5 MHz (image - 1)	EDR 3 Mbps	—	-42.50	—	dB
Receiver ACI @ -4 MHz (image)	EDR 3 Mbps	—	-24.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	EDR 3 Mbps	—	-40.00	—	dB
Receiver ACI @ -2 MHz	EDR 3 Mbps	—	-40.00	—	dB
Receiver ACI @ -1 MHz	EDR 3 Mbps	—	-8.00	—	dB
Receiver CCI	EDR 3 Mbps	—	15.00	—	dB
Receiver ACI @ +1 MHz	EDR 3 Mbps	—	-8.00	—	dB
Receiver ACI @ +2 MHz	EDR 3 Mbps	—	-40.50	—	dB
Receiver ACI @ +3 MHz	EDR 3 Mbps	—	-45.50	—	dB
Bluetooth LE 1 Mbps					
Receiver ACI @ -5 MHz (image - 1)	Bluetooth LE 1 Mbps	—	-40.00	—	dB
Receiver ACI @ -4 MHz (image)	Bluetooth LE 1 Mbps	—	-31.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	Bluetooth LE 1 Mbps	—	-33.00	—	dB
Receiver ACI @ -2 MHz	Bluetooth LE 1 Mbps	—	-41.00	—	dB
Receiver ACI @ -1 MHz	Bluetooth LE 1 Mbps	—	-3.00	—	dB
Receiver CCI	Bluetooth LE 1 Mbps	—	9.00	—	dB
Receiver ACI @ +1 MHz	Bluetooth LE 1 Mbps	—	-7.00	—	dB
Receiver ACI @ +2 MHz	Bluetooth LE 1 Mbps	—	-42.00	—	dB
Receiver ACI @ +3 MHz	Bluetooth LE 1 Mbps	—	-50.00	—	dB

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 45. Bluetooth/Bluetooth LE receiver performance ...continued

Bluetooth/Bluetooth LE receiver refers to Dirty TX. That is, the transmitter has impairments as specified by the Bluetooth SIG standard.

Parameter	Conditions	Min	Typ.	Max	Unit
Bluetooth LE 2 Mbps					
Receiver ACI @ -6MHz (image - 2)	Bluetooth LE 2 Mbps	—	-52.50	—	dB
Receiver ACI @ -4 MHz (image)	Bluetooth LE 2 Mbps	—	-29.00	—	dB
Receiver ACI @ -2 MHz	Bluetooth LE 2 Mbps	—	-21.00	—	dB
Receiver CCI	Bluetooth LE 2 Mbps	—	8.00	—	dB
Receiver ACI @ +2 MHz	Bluetooth LE 2 Mbps	—	-26.00	—	dB
Receiver ACI @ +4 MHz	Bluetooth LE 2 Mbps	—	-50.00	—	dB
Receiver ACI @ +6 MHz	Bluetooth LE 2 Mbps	—	-54.00	—	dB
Bluetooth LR 125 Kbps					
Receiver ACI @ -5 MHz (image - 1)	Bluetooth LR 125 Kbps	—	-44.00	—	dB
Receiver ACI @ -4 MHz (image)	Bluetooth LR 125 Kbps	—	-31.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	Bluetooth LR 125 Kbps	—	-34.00	—	dB
Receiver ACI @ -2 MHz	Bluetooth LR 125 Kbps	—	-50.00	—	dB
Receiver ACI @ -1 MHz	Bluetooth LR 125 Kbps	—	-9.00	—	dB
Receiver CCI	Bluetooth LR 125 Kbps	—	3.00	—	dB
Receiver ACI @ +1 MHz	Bluetooth LR 125 Kbps	—	-10.00	—	dB
Receiver ACI @ +2 MHz	Bluetooth LR 125 Kbps	—	-51.00	—	dB
Receiver ACI @ +3 MHz	Bluetooth LR 125 Kbps	—	-59.00	—	dB
Bluetooth LR 500 Kbps					
Receiver ACI @ -5 MHz (image - 1)	Bluetooth LR 500 Kbps	—	-41.00	—	dB
Receiver ACI @ -4 MHz (image)	Bluetooth LR 500 Kbps	—	-28.00	—	dB
Receiver ACI @ -3 MHz (image + 1)	Bluetooth LR 500 Kbps	—	-34.00	—	dB
Receiver ACI @ -2 MHz	Bluetooth LR 500 Kbps	—	-49.00	—	dB
Receiver ACI @ -1 MHz	Bluetooth LR 500 Kbps	—	-5.00	—	dB
Receiver CCI	Bluetooth LR 500 Kbps	—	9.00	—	dB
Receiver ACI @ +1 MHz	Bluetooth LR 500 Kbps	—	-9.00	—	dB
Receiver ACI @ +2 MHz	Bluetooth LR 500 Kbps	—	-49.00	—	dB
Receiver ACI @ +3 MHz	Bluetooth LR 500 Kbps	—	-52.00	—	dB

[1] The selectivity numbers show C/I ratio (in dB).

10.2.2 Bluetooth/Bluetooth LE transmitter performance

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and at BRF_ANT pin.

Table 46. Bluetooth/Bluetooth LE transmitter performance

Parameter	Conditions	Min	Typ.	Max	Unit
Frequency range	—	2400	—	2483	MHz
Regulatory					
Transmit power (BDR)	13 dBm (mask compliant)	—	13.00	—	dBm
Transmit power (EDR)	10 dBm (EVM and mask compliant)	—	9.90	—	dBm
Transmit power (Bluetooth LE)	13 dBm (mask compliant)	—	12.90	—	dBm
Out-of-band noise floor					
Out-of band noise floor at different operation standard frequency range (TX at 13 dBm with 100% duty cycle)		—	-136.00	—	dBm/Hz
Transmit frequency error					
Transmit frequency error		—	8.80	—	kHz
Transmit output power					
Transmit output power accuracy (BDR/Bluetooth LE)		-2.00	—	2.00	dB
Transmit output power control step (BDR)		—	1.00	—	dB
Transmit output power level control range (BDR)		-21.10	—	12.80	dBm
Transmit output power accuracy (EDR)		-2.00	—	2.00	dB
Transmit output power control step (EDR)		—	1.00	—	dB
Transmit output power level control range (EDR)		-24.00	—	10.00	dBm

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 46. Bluetooth/Bluetooth LE transmitter performance...continued

Parameter	Conditions	Min	Typ.	Max	Unit
Transmit harmonics and sub harmonics ^[1]					
Transmit general spurs, harmonics, and sub-harmonics (TX at 13 dBm with 100% duty cycle)	< 1GHz	—	-70.00	—	dBm/100 kHz
Transmit general spurs, harmonics, and sub-harmonics (TX at 13 dBm with 100% duty cycle)	1 GHz to 18 GHz	—	-65.30	—	dBm/100 kHz
Transmit general spurs, harmonics, and sub-harmonics (TX at 13 dBm with 100% duty cycle)	2nd harmonic	—	-62.00	—	dBm/1 MHz
Transmit general spurs, harmonics, and sub-harmonics (TX at 13 dBm with 100% duty cycle)	3rd harmonic	—	-66.00	—	dBm/1 MHz

[1] Spurious and harmonics are measured with the front-end configuration of the reference design.

10.3 Current consumption

Note: Unless otherwise stated, all specifications are at 25°C, nominal voltage, and typical value. The current consumption data is collected with PCIe-UART interface configuration, and using the internal Buck regulator.

Table 47. Current consumption values

Mode	Conditions	1.8 V	3.3 V	Unit
Power down				
Power down	PDn asserted	0.01	0.02	mA
Deep sleep				
Bluetooth only in deep sleep mode	PCIe - Connected to host	1.66	0.20	mA
Wi-Fi only in deep sleep mode	PCIe L1 + CLKREQ	1.82	0.18	mA
Wi-Fi and Bluetooth both in deep sleep mode	PCIe L1 + CLKREQ	1.91	0.19	mA
Wi-Fi only in deep sleep mode	PCIe L1.2	0.80	0.21	mA
Bluetooth LE only (Wi-Fi MAC1 and MAC2 in sleep mode)				
Bluetooth LE advertise	interval = 1.28 second	1.80	0.20	mA
Bluetooth LE scan	interval = 1.28 second, window = 11.25 ms	2.30	0.20	mA
Bluetooth LE transmit	at 0 dBm, 1 Mbps	37	0.30	mA
Bluetooth LE transmit	at 4 dBm, 1 Mbps	40	0.30	mA
Bluetooth LE transmit	at 10 dBm, 1 Mbps	61	0.30	mA
Bluetooth LE receive	1 Mbps	32	0.30	mA
Bluetooth only (Wi-Fi MAC1 and MAC2 in sleep mode)				
Bluetooth idle	—	18	0.28	mA
Bluetooth transmit	at 0 dBm, DH5	37	0.30	mA
Bluetooth transmit	at 4 dBm, DH5	40	0.30	mA
Bluetooth transmit	at 10 dBm, DH5	61	0.30	mA
Bluetooth transmit	at 13 dBm, DH5	71	0.30	mA
Bluetooth receive	DH5	32	0.30	mA
Bluetooth only (Wi-Fi MAC1 and MAC2 in sleep mode) – 85°C				
Bluetooth peak transmit	at 13 dBm, DH5	90	0.42	mA
Bluetooth peak receive	—	48	0.41	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
IEEE Wi-Fi power save mode (Bluetooth in sleep mode)				
2.4 GHz Wi-Fi (MAC1)				
DTIM-1 (2.4 GHz, 20 MHz)	PCIe L1 + CLKREQ, channel-1, beacon interval 102.4 ms, beacon length 1000 μs, 2.4 GHz basic rate for beacon transmit: 1 Mbps	4.75	0.20	mA
DTIM-3 (2.4 GHz, 20 MHz)		2.90	0.20	mA
DTIM-5 (2.4 GHz, 20 MHz)		2.60	0.20	mA
DTIM-10 (2.4 GHz, 20 MHz)		2.20	0.20	mA
2.4 GHz Wi-Fi (MAC2)				
DTIM-1 (2.4 GHz, 20 MHz)	PCIe L1 + CLKREQ, channel-1, beacon interval 102.4 ms, beacon length 1000 μs, 2.4 GHz basic rate for beacon transmit: 1 Mbps	3.60	0.20	mA
DTIM-3 (2.4 GHz, 20 MHz)		2.50	0.20	mA
DTIM-5 (2.4 GHz, 20 MHz)		2.30	0.20	mA
DTIM-10 (2.4 GHz, 20 MHz)		2.10	0.20	mA
5 GHz Wi-Fi (MAC1)				
DTIM-1 (5 GHz, 20 MHz)	PCIe L1 + CLKREQ, channel-36, beacon interval 102.4 ms, beacon length 300 μs, 5 GHz basic rate for beacon transmit: 6 Mbps	4.20	0.20	mA
DTIM-3 (5 GHz, 20 MHz)		2.65	0.20	mA
DTIM-5 (5 GHz, 20 MHz)		2.40	0.20	mA
DTIM-10 (5 GHz, 20 MHz)		2.20	0.20	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
Wi-Fi idle mode				
2.4 GHz 1x1 receive idle mode (MAC1)	2.4 GHz, RX, 802.11b, 20 MHz, channel-1, listening	169	0.28	mA
	2.4 GHz, RX, 802.11g, 20 MHz, channel-1, listening	168	0.28	mA
	2.4 GHz, RX, 802.11n, 20 MHz, channel-1, listening	169	0.28	mA
	2.4 GHz, RX, 802.11n, 40 MHz, channel-1, listening	184	0.28	mA
	2.4 GHz, RX, 802.11ax, 20 MHz, channel-1, listening	163	0.28	mA
	2.4 GHz, RX, 802.11ax, 40 MHz, channel-1, listening	181	0.28	mA
5 GHz 1x1 receive idle mode (MAC1)	5 GHz, RX, 802.11a, 20 MHz, channel-36, listening	210	0.28	mA
	5 GHz, RX, 802.11n, 20 MHz, channel-36, listening	209	0.28	mA
	5 GHz, RX, 802.11n, 40 MHz, channel-36, listening	222	0.28	mA
	5 GHz, RX, 802.11ac, 20 MHz, channel-36, listening	210	0.28	mA
	5 GHz, RX, 802.11ac, 40 MHz, channel-36, listening	223	0.28	mA
	5 GHz, RX, 802.11ac, 80 MHz, channel-36, listening	261	0.28	mA
	5 GHz, RX, 802.11ax, 20 MHz, channel-36, listening	210	0.28	mA
	5 GHz, RX, 802.11ax, 40 MHz, channel-36, listening	223	0.28	mA
	5 GHz, RX, 802.11ax, 80 MHz, channel-36, listening	263	0.28	mA
6 GHz 1x1 receive idle mode (MAC1)	6 GHz, RX, 802.11ax, 20 MHz, channel-33, listening	219	0.28	mA
	6 GHz, RX, 802.11ax, 40 MHz, channel-33, listening	236	0.28	mA
	6 GHz, RX, 802.11ax, 80 MHz, channel-33, listening	275	0.28	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
2.4 GHz 2x2 receive idle mode (MAC1)	2.4 GHz, RX, 802.11b, 20 MHz, channel-1, listening	205	0.28	mA
	2.4 GHz, RX, 802.11g, 20 MHz, channel-1, listening	204	0.28	mA
	2.4 GHz, RX, 802.11n, 20 MHz, channel-1, listening	206	0.28	mA
	2.4 GHz, RX, 802.11n, 40 MHz, channel-1, listening	229	0.28	mA
	2.4 GHz, RX, 802.11ax, 20 MHz, channel-1, listening	203	0.28	mA
	2.4 GHz, RX, 802.11ax, 40 MHz, channel-1, listening	223	0.28	mA
5 GHz 2x2 receive idle mode (MAC1)	5 GHz, RX, 802.11a, 20 MHz, channel-36, listening	251	0.28	mA
	5 GHz, RX, 802.11n, 20 MHz, channel-36, listening	250	0.28	mA
	5 GHz, RX, 802.11n, 40 MHz, channel-36, listening	286	0.28	mA
	5 GHz, RX, 802.11ac, 20 MHz, channel-36, listening	251	0.28	mA
	5 GHz, RX, 802.11ac, 40 MHz, channel-36, listening	287	0.28	mA
	5 GHz, RX, 802.11ac, 80 MHz, channel-36, listening	348	0.28	mA
	5 GHz, RX, 802.11ax, 20 MHz, channel-36, listening	250	0.28	mA
	5 GHz, RX, 802.11ax, 40 MHz, channel-36, listening	270	0.28	mA
	5 GHz, RX, 802.11ax, 80 MHz, channel-36, listening	348	0.28	mA
6 GHz 2x2 receive idle mode (MAC1)	6 GHz, RX, 802.11ax, 20 MHz, channel-33, listening	266	0.28	mA
	6 GHz, RX, 802.11ax, 40 MHz, channel-33, listening	306	0.28	mA
	6 GHz, RX, 802.11ax, 80 MHz, channel-33, listening	366	0.28	mA
2.4 GHz 1x1 receive idle mode (MAC2)	2.4 GHz, RX, 802.11b, 20 MHz, channel-1, listening	125	0.28	mA
	2.4 GHz, RX, 802.11g, 20 MHz, channel-1, listening	121	0.28	mA
	2.4 GHz, RX, 802.11n, 20 MHz, channel-1, listening	125	0.28	mA
	2.4 GHz, RX, 802.11ax, 20 MHz, channel-1, listening	121	0.28	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
Wi-Fi active receive mode				
2.4 GHz 1x1 receive mode (MAC1)	2.4 GHz, 802.11b, 20 MHz, 11 Mbps, channel-1	174	0.28	mA
	2.4 GHz, 802.11g, 20 MHz, 54 Mbps, channel-1	215	0.28	mA
	2.4 GHz, 802.11n, 20 MHz, MCS7, channel-1	240	0.28	mA
	2.4 GHz, 802.11n, 40 MHz, MCS7, channel-1	267	0.28	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11, channel-1	224	0.28	mA
	2.4 GHz, 802.11ax, 40 MHz, MCS11, channel-1	269	0.28	mA
5 GHz 1x1 receive mode (MAC1)	5 GHz, 802.11a, 20 MHz, 54 Mbps, channel-36	245	0.28	mA
	5 GHz, 802.11n, 20 MHz, MCS7, channel-36	270	0.28	mA
	5 GHz, 802.11n, 40 MHz, MCS7, channel-36	298	0.28	mA
	5 GHz, 802.11ac, 20 MHz, MCS8, channel-36	262	0.28	mA
	5 GHz, 802.11ac, 40 MHz, MCS9, channel-36	292	0.28	mA
	5 GHz, 802.11ac, 80 MHz, MCS9, channel-36	357	0.28	mA
	5 GHz, 802.11ax, 20 MHz, MCS11, channel-36	274	0.28	mA
	5 GHz, 802.11ax, 40 MHz, MCS11, channel-36	293	0.28	mA
	5 GHz, 802.11ax, 80 MHz, MCS11, channel-36	372	0.28	mA
6 GHz 1x1 receive mode (MAC1)	5 GHz, 802.11ax, 20 MHz, MCS11, channel-33	283	0.28	mA
	6 GHz, 802.11ax, 40 MHz, MCS11, channel-33	319	0.28	mA
	6 GHz, 802.11ax, 80 MHz, MCS11, channel-33	380	0.28	mA
2.4 GHz 2x2 receive mode (MAC1)	2.4 GHz, 802.11b, 20 MHz, 11 Mbps, channel-1	206	0.28	mA
	2.4 GHz, 802.11g, 20 MHz, 54 Mbps, channel-1	245	0.28	mA
	2.4 GHz, 802.11n, 20 MHz, MCS15, channel-1	274	0.28	mA
	2.4 GHz, 802.11n, 40 MHz, MCS15, channel-1	319	0.28	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11, channel-1	273	0.28	mA
	2.4 GHz, 802.11ax, 40 MHz, MCS11, channel-1	326	0.28	mA
5 GHz 2x2 receive mode (MAC1)	5 GHz, 802.11a, 20 MHz, 54 Mbps, channel-36	297	0.28	mA
	5 GHz, 802.11n, 20 MHz, MCS15, channel-36	309	0.28	mA
	5 GHz, 802.11n, 40 MHz, MCS15, channel-36	384	0.28	mA
	5 GHz, 802.11ac, 20 MHz, MCS8, channel-36	335	0.28	mA
	5 GHz, 802.11ac, 40 MHz, MCS9, channel-36	370	0.28	mA
	5 GHz, 802.11ac, 80 MHz, MCS9, channel-36	466	0.28	mA
	5 GHz, 802.11ax, 20 MHz, MCS11, channel-36	326	0.28	mA
	5 GHz, 802.11ax, 40 MHz, MCS11, channel-36	379	0.28	mA
	5 GHz, 802.11ax, 80 MHz, MCS11, channel-36	487	0.28	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
6 GHz 2x2 receive mode (MAC1)	6 GHz, 802.11ax, 20 MHz, MCS11, channel-33	337	0.28	mA
	6 GHz, 802.11ax, 40 MHz, MCS11, channel-33	387	0.28	mA
	6 GHz, 802.11ax, 80 MHz, MCS11, channel-33	516	0.28	mA
2.4 GHz 1x1 receive mode (MAC2)	2.4 GHz, 802.11b, 20 MHz, 11 Mbps, channel-1	127	0.28	mA
	2.4 GHz, 802.11g, 20 MHz, 54 Mbps, channel-1	147	0.28	mA
	2.4 GHz, 802.11n, 20 MHz, MCS7, channel-1	161	0.28	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11, channel-1	162	0.28	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
Wi-Fi active transmit mode (transmit power referred to chip pin)				
2.4 GHz 1x1 transmit mode (MAC1)	2.4 GHz, 802.11b, 20 MHz, 11Mbps at 20 dBm, channel-1	227	159	mA
	2.4 GHz, 802.11g, 20 MHz, 54Mbps at 20 dBm, channel-1	237	156	mA
	2.4 GHz, 802.11n, 20 MHz, MCS7 at 20 dBm, channel-1	245	158	mA
	2.4 GHz, 802.11n, 40 MHz, MCS7 at 20 dBm, channel-1	249	152	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11 at 20 dBm, channel-1	258	158	mA
	2.4 GHz, 802.11ax, 40 MHz, MCS11 at 20 dBm, channel-1	273	154	mA
5 GHz 1x1 transmit mode (MAC1)	5 GHz, 802.11a, 20 MHz, 54 Mbps at 19 dBm, channel-36	365	268	mA
	5 GHz, 802.11n, 20 MHz, MCS7 at 19 dBm, channel-36	362	269	mA
	5 GHz, 802.11n, 40 MHz, MCS7 at 17 dBm, channel-36	361	234	mA
	5 GHz, 802.11ac, 20 MHz, MCS8 at 19 dBm, channel-36	360	262	mA
	5 GHz, 802.11ac, 40 MHz, MCS9 at 17 dBm, channel-36	362	234	mA
	5 GHz, 802.11ac, 80 MHz, MCS9 at 15 dBm, channel-36	372	210	mA
	5 GHz, 802.11ax, 20 MHz, MCS11 at 19 dBm, channel-36	373	268	mA
	5 GHz, 802.11ax, 40 MHz, MCS11 at 17 dBm, channel-36	359	233	mA
	5 GHz, 802.11ax, 80 MHz, MCS11 at 15 dBm, channel-36	388	211	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
6 GHz 1x1 transmit mode (MAC1)	6 GHz, 802.11ax, 20 MHz, MCS11 at 19 dBm, channel-33	373	249	mA
	6 GHz, 802.11ax, 40 MHz, MCS11 at 17 dBm, channel-33	373	223	mA
	6 GHz, 802.11ax, 80 MHz, MCS11 at 15 dBm, channel-33	392	202	mA
2.4 GHz 2x2 transmit mode (MAC1)	2.4 GHz, 802.11b, 20 MHz, 11Mbps at 20 dBm, channel-1	343	319	mA
	2.4 GHz, 802.11g, 20 MHz, 54Mbps at 20 dBm, channel-1	352	335	mA
	2.4 GHz, 802.11n, 20 MHz, MCS15 at 20 dBm, channel-1	360	320	mA
	2.4 GHz, 802.11n, 40 MHz, MCS15 at 20 dBm, channel-1	390	340	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11 at 20 dBm, channel-1	373	329	mA
	2.4 GHz, 802.11ax, 40 MHz, MCS11 at 20 dBm, channel-1	404	340	mA
5 GHz 2x2 transmit mode (MAC1)	5 GHz, 802.11a, 20 MHz, 54 Mbps at 19 dBm, channel-36	526	533	mA
	5 GHz, 802.11n, 20 MHz, MCS15 at 19 dBm, channel-36	552	534	mA
	5 GHz, 802.11n, 40 MHz, MCS15 at 17 dBm, channel-36	563	463	mA
	5 GHz, 802.11ac, 20 MHz, MCS8 at 19 dBm, channel-36	565	544	mA
	5 GHz, 802.11ac, 40 MHz, MCS9 at 17 dBm, channel-36	576	474	mA
	5 GHz, 802.11ac, 80 MHz, MCS9 at 15 dBm, channel-36	613	434	mA
	5 GHz, 802.11ax, 20 MHz, MCS11 at 19 dBm, channel-36	568	542	mA
	5 GHz, 802.11ax, 40 MHz, MCS11 at 17 dBm, channel-36	581	480	mA
	5 GHz, 802.11ax, 80 MHz, MCS11 at 15 dBm, channel-36	646	434	mA
6 GHz 2x2 transmit mode (MAC1)	6 GHz, 802.11ax, 20 MHz, MCS11 at 19 dBm, channel-33	576	537	mA
	6 GHz, 802.11ax, 40 MHz, MCS11 at 17 dBm, channel-33	584	476	mA
	6 GHz, 802.11ax, 80 MHz, MCS11 at 15 dBm, channel-33	653	425	mA

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 47. Current consumption values...continued

Mode	Conditions	1.8 V	3.3 V	Unit
2.4 GHz 1x1 transmit mode (MAC2)	2.4 GHz, 802.11b, 20 MHz, 11 Mbps at 20 dBm, channel-1	171	168	mA
	2.4 GHz, 802.11g, 20 MHz, 54 Mbps at 20 dBm, channel-1	200	182	mA
	2.4 GHz, 802.11n, 20 MHz, MCS7 at 20 dBm, channel-1	195	165	mA
	2.4 GHz, 802.11ax, 20 MHz, MCS11 at 20 dBm, channel-1	205	182	mA
Dual band concurrent (DBC) mode (transmit power referred to chip pin)				
DBC mode measured at 25°C				
Wi-Fi MAC1 transmit 5 GHz, and Wi-Fi MAC2 transmit 2.4 GHz	TX, MAC1, 5 GHz, 802.11ax, 2x2, 80 MHz, MCS11 at 15 dBm (channel - 36) + TX, MAC2, 2.4 GHz, 802.11ax, 1x1, 20 MHz, MCS11 at 20 dBm (channel - 1)	734	650	mA
Wi-Fi MAC1 receive 5 GHz, and Wi-Fi MAC2 receive 2.4 GHz	RX, MAC1, 5 GHz, 802.11ax, 2x2, 80 MHz, MCS11 (channel -36) + RX, MAC2, 2.4 GHz, 802.11ax, 1x1, 20 MHz, MCS11 (channel - 1)	568	0.28	mA
Wi-Fi MAC1 transmit 5 GHz, and Wi-Fi MAC2 receive 2.4 GHz	TX, MAC1, 5 GHz, 802.11ax, 2x2, 80 MHz, MCS11 at 15 dBm (channel - 36) + RX, MAC2, 2.4 GHz, 802.11ax, 1x1, 20 MHz, MCS11 (channel - 1)	647	413	mA
Wi-Fi MAC1 receive 5 GHz, and Wi-Fi MAC2 transmit 2.4 GHz	RX, MAC1, 5 GHz, 802.11ax, 2x2, 80 MHz, MCS11 (channel - 36), TX, MAC2, 2.4 GHz, 802.11ax, 1x1, 20 MHz, MCS11 at 20 dBm (channel - 1)	613	190	mA
Peak current				
Peak current during device initialization	Measured at 25°C	880	650	mA
Peak current during device initialization	Measured at 85°C	1030	670	mA

11 Electrical specifications

11.1 GPIO/LED interface specifications

11.1.1 VIO DC characteristics

11.1.1.1 VIO 1.8 V operation

Table 48. DC electrical specifications—1.8V operation (VIO)

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#).

Symbol	Parameter	Condition	Min	Typ	Max	Unit
VIO	I/O pad supply voltage	—	1.71	1.8	1.89	V
V _{IH}	Input high voltage	—	0.7*VIO	—	VIO+0.4	V
V _{IL}	Input low voltage	—	-0.4	—	0.3*VIO	V
V _{HYS}	Input hysteresis	—	100	—	—	mV
V _{OH}	Output high voltage	—	VIO-0.4	—	—	V
V _{OL}	Output low voltage	—	—	—	0.4	V

11.1.1.2 VIO 3.3 V operation

Table 49. DC electrical specifications—3.3V operation (VIO)

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#).

Symbol	Parameter	Condition	Min	Typ	Max	Unit
VIO	I/O pad supply voltage	—	3.14	3.3	3.46	V
V _{IH}	Input high voltage	—	0.7*VIO	—	VIO+0.4	V
V _{IL}	Input low voltage	—	-0.4	—	0.3*VIO	V
V _{HYS}	Input hysteresis	—	100	—	—	mV
V _{OH}	Output high voltage	—	VIO-0.4	—	—	V
V _{OL}	Output low voltage	—	—	—	0.4	V

11.1.2 LED mode

Table 50. LED mode data

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#).

Symbol	Parameter	Condition	Typ	Unit
I _{OH}	Output high current	Tristate on pad (requires pull-up on board)	0	mA
I _{OL}	Output low current	@ 0.4V	10	mA

11.2 RF front-end control interface specifications

11.2.1 VIO_RF DC characteristics

11.2.1.1 VIO_RF 1.8 V operation

Table 51. DC electrical specifications—1.8V operation (VIO_RF)
Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V _{IH}	Input high voltage	—	0.7*VIO_RF	—	VIO_RF+0.4	V
V _{IL}	Input low voltage	—	-0.4	—	0.3*VIO_RF	V
V _{HYS}	Input hysteresis	—	100	—	—	mV
V _{OH}	Output high voltage	—	VIO_RF-0.4	—	—	V
V _{OL}	Output low voltage	—	—	—	0.4	V

11.2.1.2 VIO_RF 3.3 V operation

Table 52. DC electrical specifications—3.3V operation (VIO_RF)
Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V _{IH}	Input high voltage	—	0.7*VIO_RF	—	VIO_RF+0.4	V
V _{IL}	Input low voltage	—	-0.4	—	0.3*VIO_RF	V
V _{HYS}	Input hysteresis	—	100	—	—	mV
V _{OH}	Output high voltage	—	VIO_RF-0.4	—	—	V
V _{OL}	Output low voltage	—	—	—	0.4	V

11.3 PCIe host interface specifications

11.3.1 PCIe DC characteristics

Table 53. DC electrical specifications—1.8 V and 3.3V operation (PCIE_WAKEn, PCIE_CLKREQn)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V _{IH}	Input high voltage	—	1.4	—	3.46	V
V _{IL}	Input low voltage	—	-0.4	—	0.6	V
V _{HYS}	Input hysteresis	—	150	—	—	mV
V _{OL}	Output low voltage	—	—	—	0.4	V

11.3.2 Differential TX output specifications

Table 54. PCI express TX output specifications data—2.5 GT/s

In accordance with PCI Express Base Specification, Revision 2.1 March 4, 2009. Over full range of values specified in [Section 9 "Recommended operating conditions"](#) unless otherwise specified.

Symbol	Parameter	Min	Typ	Max	Unit
UI	Unit interval (UI) The specified UI is equivalent to a tolerance of ± 300 ppm for each Refclk source. Period does not account for SSC induced variations.	399.88	—	400.12	ps
V _{TX-DIFF-PP}	Differential peak-to-peak TX voltage swing $V_{TX-DIFFpp} = 2 * V_{TXD+} - V_{TXD-} $	0.8	—	1.2	V
V _{TX-DIFF-PP-LOW}	Low power differential peak-to-peak TX voltage swing $V_{TX-DIFFpp} = 2 * V_{TXD+} - V_{TXD-} $	0.4	—	1.2	V
V _{TX-DE-RATIO-3.5dB}	TX de-emphasis level ratio (3.5 dB)	3.0	—	4.0	dB
T _{TX-EYE}	TX eye including all jitter sources	0.75	—	—	UI
T _{TX-EYE-MEDIAN-to-MAX-JITTER}	Maximum time between jitter median and maximum deviation from median	—	—	0.125	UI
T _{TX-RISE-FALL}	TX rise/fall time Measured differentially from 20% to 80% of swing.	0.125	—	—	UI
RL _{TX-DIFF}	TX package plus Si differential return loss	10	—	—	dB
RL _{TX-CM}	TX package plus Si common mode return loss	6	—	—	dB
V _{TX-CM-AC-P}	TX AC common mode voltage	—	20	—	mV
I _{TX-SHORT}	TX short circuit current limit	—	—	90	mA
V _{TX-DC-CM}	TX DC common mode voltage	0	—	3.6	V
V _{TX-CM-DC-ACTIVE-IDLE-DELTA}	Absolute delta of DC common mode voltage during L0 and electrical idle	0	—	100	mV
V _{TX-IDLE-DIFF-AC-p}	Electrical idle differential peak output voltage	0	—	20	mV
V _{TX-RCV-DETECT}	Voltage change allowed during receiver detection	—	—	600	mV
T _{TX-IDLE-MIN}	Minimum time spent in electrical idle	20	—	—	ns
T _{TX-IDLE-SET-TO-IDLE}	Maximum time to transition to a valid electrical idle after sending an electrical idle ordered set	—	—	8	ns

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 54. PCI express TX output specifications data—2.5 GT/s...continued

In accordance with PCI Express Base Specification, Revision 2.1 March 4, 2009. Over full range of values specified in [Section 9 "Recommended operating conditions"](#) unless otherwise specified.

Symbol	Parameter	Min	Typ	Max	Unit
T _{TX-IDLE-TO-DIFF-DATA}	Maximum time to transition to valid diff signaling after leaving electrical idle	—	—	8	ns
T _{CROSSLINK}	Crosslink random timeout	—	—	1.0	ms
C _{TX}	AC coupling capacitor	75	—	200	nF

11.3.3 Differential RX input specifications

Table 55. PCI express RX input specifications data—2.5 GT/s

In accordance with PCI Express Base Specification, Revision 2.1 March 4, 2009. Over full range of values specified in [Section 9 "Recommended operating conditions"](#) unless otherwise specified.

Symbol	Parameter	Min	Typ	Max	Unit
UI	Unit Interval (UI) UI does not account for SSC induced variations.	399.88	—	400.12	ps
V _{RX-DIFF-PP-CC}	Differential RX peak-to-peak voltage for common Refclk RX architecture	0.175	—	1.2	V
V _{RX-DIFF-PP-DC}	Differential RX peak-to-peak voltage for data clocked RX architecture	0.175	—	1.2	V
T _{RX-EYE}	RX eye time opening Minimum eye time at RX pins to yield a 10 ⁻¹² BER.	0.40	—	—	UI
T _{RX-EYE-MEDIAN-to-MAX-JITTER}	Maximum time delta between median and deviation from median	—	—	0.3	UI
V _{RX-CM-ACp}	AC peak common mode input voltage	—	—	150	mV
RL _{RX-DIFF}	Differential return loss	15	—	—	dB
RL _{RX-CM}	Common mode return loss	0	—	3.6	dB
Z _{RX-DIFF-DC}	DC differential input impedance	80	100	120	W
Z _{RX-DC}	DC input impedance	40	50	60	W
Z _{RX-HIGH-IMP-DC}	Powered down DC input impedance	200	—	—	kΩ
V _{RX-IDLE-DET-DIFF-p-p}	Electrical idle detect threshold	65	—	175	mV
T _{RX-IDLE-DET-DIFF-ENTERTIME}	Unexpected electrical idle enter detect threshold integration time	—	—	10	ms
L _{RX-SKEW}	Total skew	—	—	20	ns

11.4 UART interface specifications

The UART Tx and Rx pins are powered from the VIO voltage supply.
See [Section 11.1.1 "VIO DC characteristics"](#) for DC specifications.

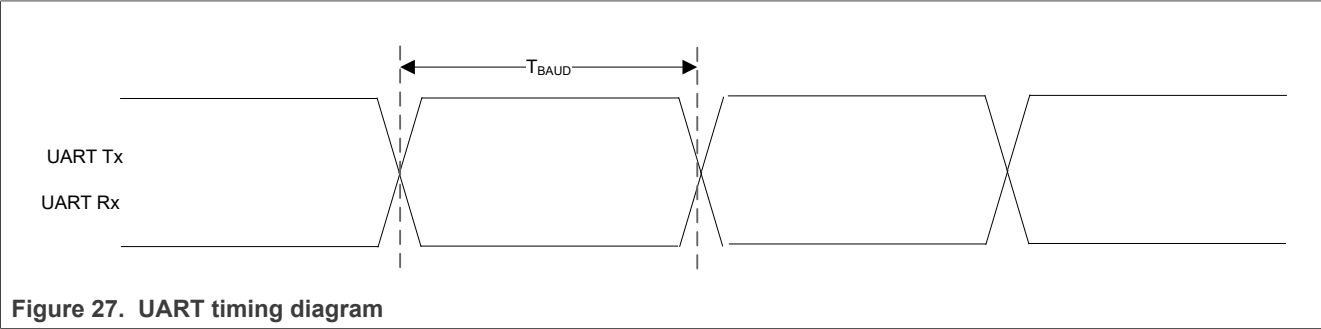


Table 56. UART timing data^{[1] [2]}
Over full range of values specified in [Section 9 "Recommended operating conditions"](#) unless otherwise specified.

Symbol	Parameter	Condition	Min	Typ	Max	Unit
T _{BAUD}	Baud time	40 MHz input clock	250	--	--	ns

[1] The acceptable deviation from the UART Rx target baud rate is ±3%.
[2] UART TX baud rate deviation is determined by the external crystal accuracy. See [Section 11.8.1](#).

11.5 Audio interface specifications

11.5.1 I2S interface specifications

The I2S pins are powered by VIO voltage supply. See [Section 11.1.1 "VIO DC characteristics"](#) for specifications.

Central mode

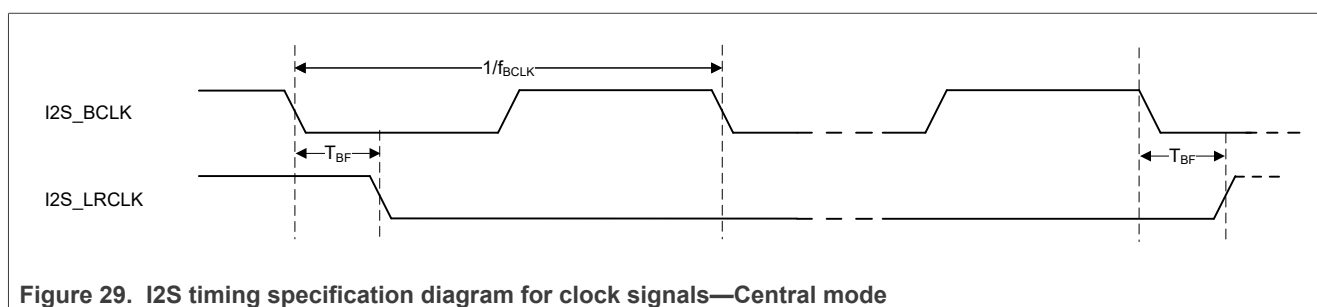
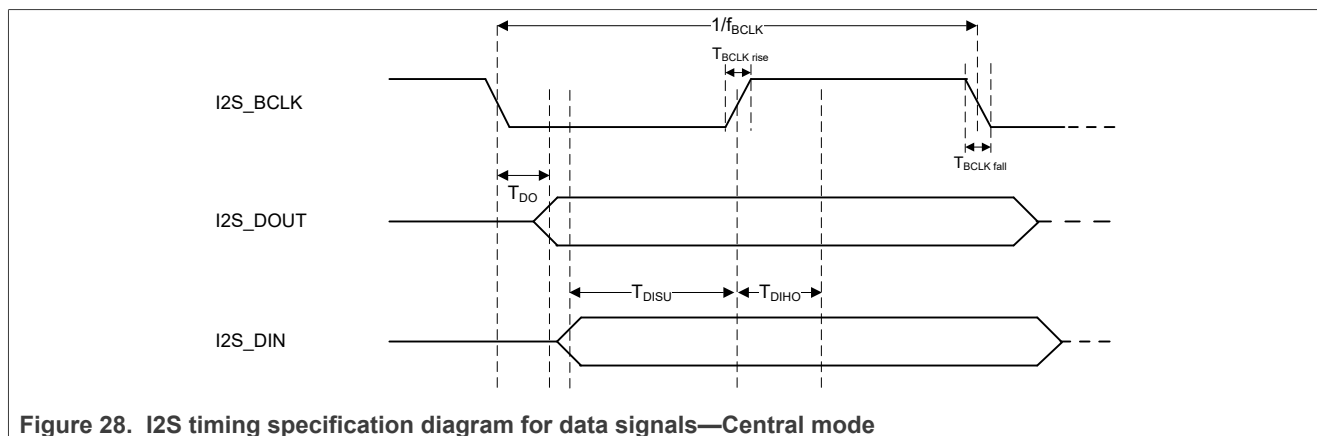


Table 57. I2S timing specification data—Centra mode

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{BCLK}	Bit clock frequency	—	1.024	2/2.048	4.096	MHz
Duty Cycle _{BCLK}	Bit clock duty cycle	—	45	50	55	%
$T_{BCLK\ rise/fall}$	I2S_BCLK rise/fall time	—	—	3	—	ns
T_{DO}	Delay from I2S_BCLK falling edge to I2S_DOUT rising edge	—	—	—	40	ns
T_{DISU}	Setup time for I2S_DIN before I2S_BCLK rising edge	—	10	—	—	ns
T_{DIHO}	Hold time for I2S_DIN after I2S_BCLK rising edge	—	0	—	—	ns
T_{BF}	Delay from I2S_BCLK falling edge to I2S_LRCLK falling edge	—	—	—	40	ns

Peripheral mode

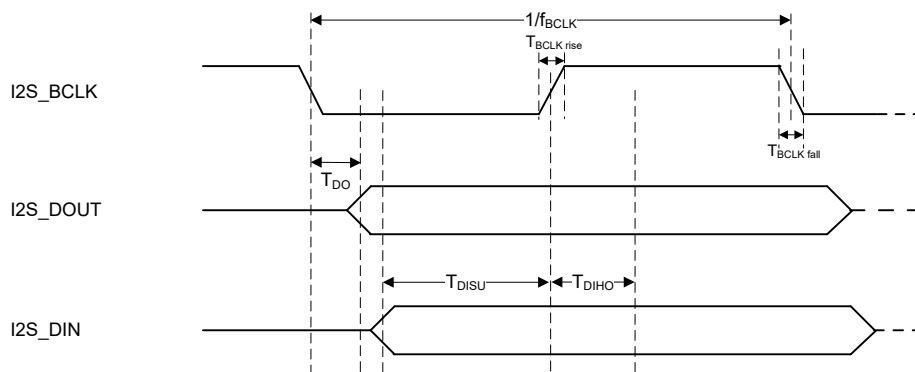


Figure 30. I2S timing specification diagram for data signals—Peripheral mode

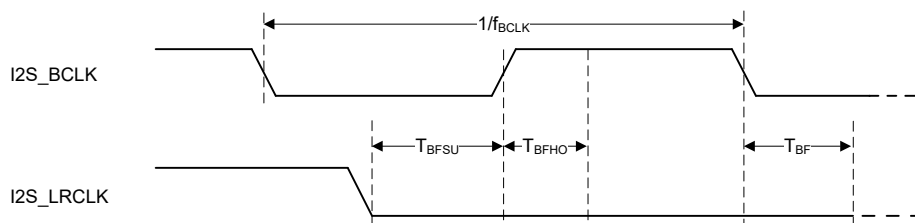


Figure 31. I2S timing specification diagram for clock signal—Peripheral mode

Table 58. I2S timing specification data—Peripheral mode

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{BCLK}	Bit clock frequency	—	1.024	2/2.048	4.096	MHz
Duty Cycle _{BCLK}	Bit clock duty cycle	—	45	50	55	%
$T_{\text{BCLK rise/fall}}$	I2S_CLK rise/fall time	—	—	3	—	ns
T_{DO}	Delay from I2S_BCLK falling edge to I2S_DOUT rising edge	—	—	—	40	ns
T_{DISU}	Setup time for I2S_DIN before I2S_BCLK rising edge	—	10	—	—	ns
T_{DIHO}	Hold time for I2S_DIN after I2S_BCLK rising edge	—	0	—	—	ns
T_{BFSU}	Setup time for I2S_LRCLK before I2S_BCLK rising edge	—	40	—	—	ns
T_{BFHO}	Hold time for I2S_LRCLK after I2S_BCLK rising edge	—	0	—	—	ns

11.5.2 PCM interface specifications

The PCM pins are powered by VIO voltage supply. See [Section 11.1.1 "VIO DC characteristics"](#) for specifications.

Central mode

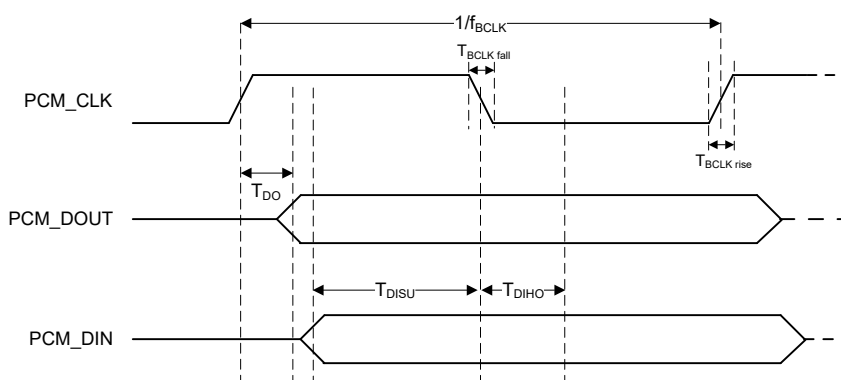


Figure 32. PCM timing specification diagram for data signals—Central mode

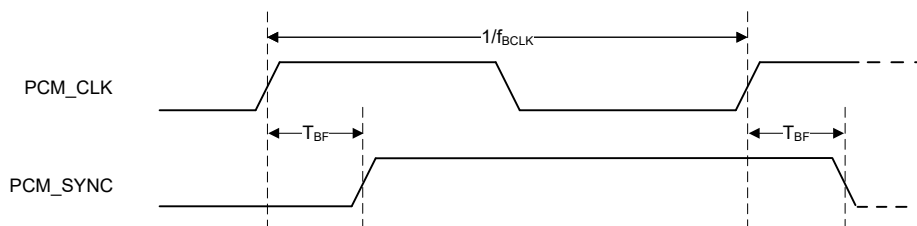


Figure 33. PCM timing specification diagram for PCM_SYNC signal—Central mode

Table 59. PCM timing specification data—Central mode

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{BCLK}	Bit clock frequency	--	2	2/2.048	2.048	MHz
Duty Cycle _{BCLK}	Bit clock duty cycle	--	0.4	0.5	0.6	--
$T_{BCLK\ rise/fall}$	PCM_CLK rise/fall time	--	--	3	--	ns
T_{DO}	Delay from PCM_CLK rising edge to PCM_DOUT rising edge	--	--	--	15	ns
T_{DISU}	Setup time for PCM_DIN before PCM_CLK falling edge	--	20	--	--	ns
T_{DIHO}	Hold time for PCM_DIN after PCM_CLK falling edge	--	15	--	--	ns
T_{BF}	Delay from PCM_CLK rising edge to PCM_SYNC rising edge	--	--	--	15	ns

Peripheral mode

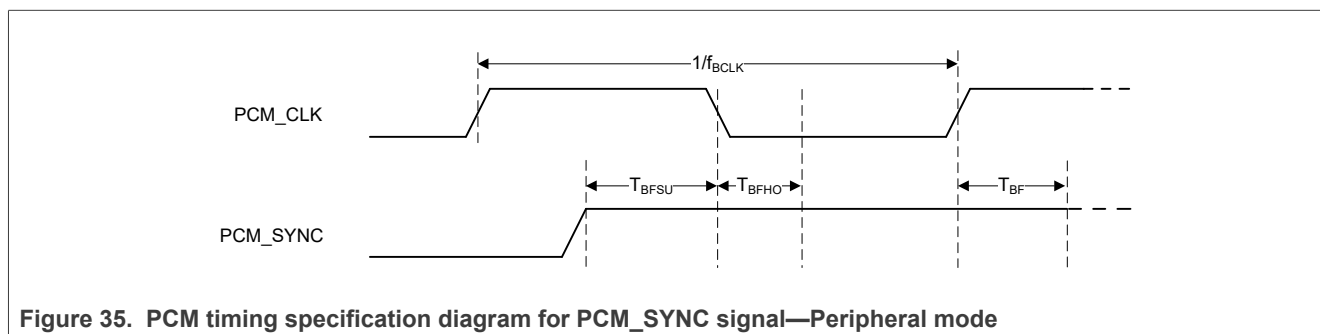
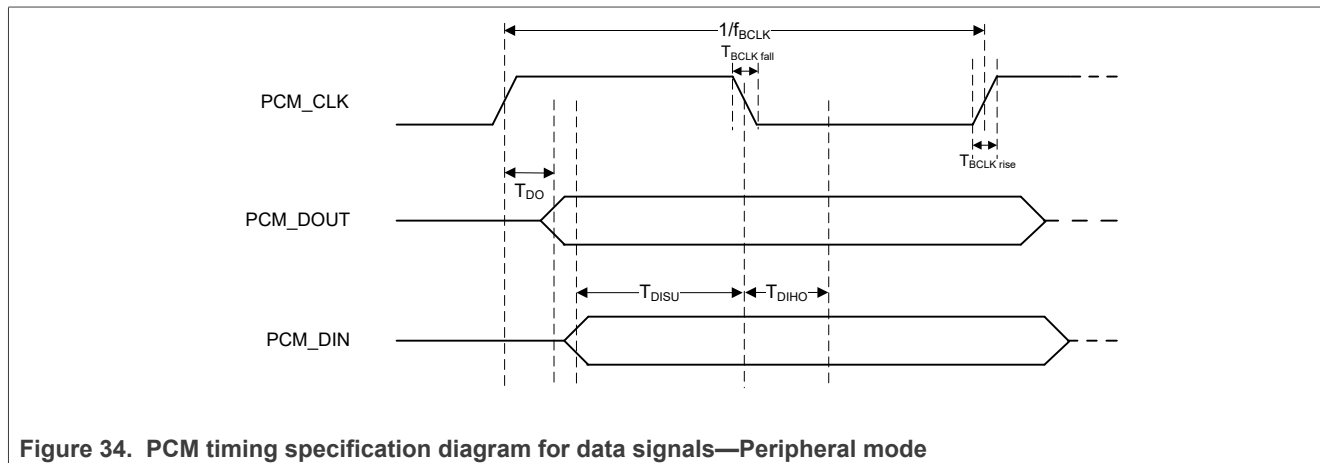


Table 60. PCM timing specification data—Peripheral mode

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
f_{BCLK}	Bit clock frequency	--	0.512 ^[1]	2/2.048	4	MHz
Duty Cycle _{BCLK}	Bit clock duty cycle	--	0.4	0.5	0.6	--
$T_{BCLK\ rise/fall}$	PCM_CLK rise/fall time	--	--	3	--	ns
T_{DO}	Delay from PCM_CLK rising edge to PCM_DOUT rising edge	--	--	--	30	ns
T_{DISU}	Setup time for PCM_DIN before PCM_CLK falling edge	--	15	--	--	ns
T_{DIHO}	Hold time for PCM_DIN after PCM_CLK falling edge	--	10	--	--	ns
T_{BFSU}	Setup time for PCM_SYNC before PCM_CLK falling edge	--	15	--	--	ns
T_{BFHO}	Hold time for PCM_SYNC after PCM_CLK falling edge	--	10	--	--	ns

[1] For applications that support dual-WBS (Wide Band Speech) capabilities over Bluetooth, a minimum PCM clock rate of 1.024 MHz is required due to bandwidth considerations. A single-WBS link or dual-NBS link configuration can be supported using a 0.512 MHz PCM clock rate.

11.6 External radio coexistence interface specifications

11.6.1 WCI-2 coexistence interface specifications

11.6.1.1 WCI-2 interface

WCI-2 is a simplified 2-wire UART interface defined in Bluetooth Core Spec Vol 7 Part C.

Figure 36 shows UART waveform.


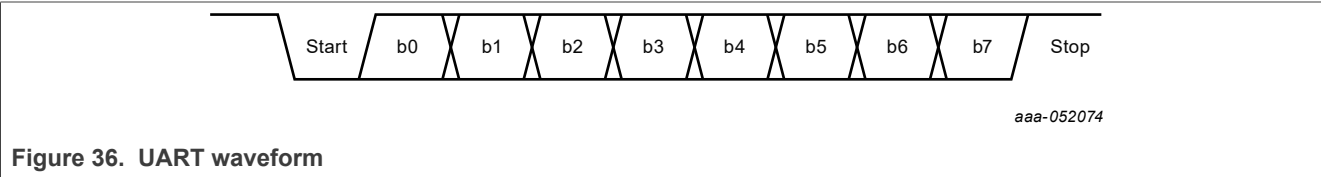


Figure 37 illustrates WCI-2 hardware coexistence interface between IW693P (Wireless SoC) and the external radio.

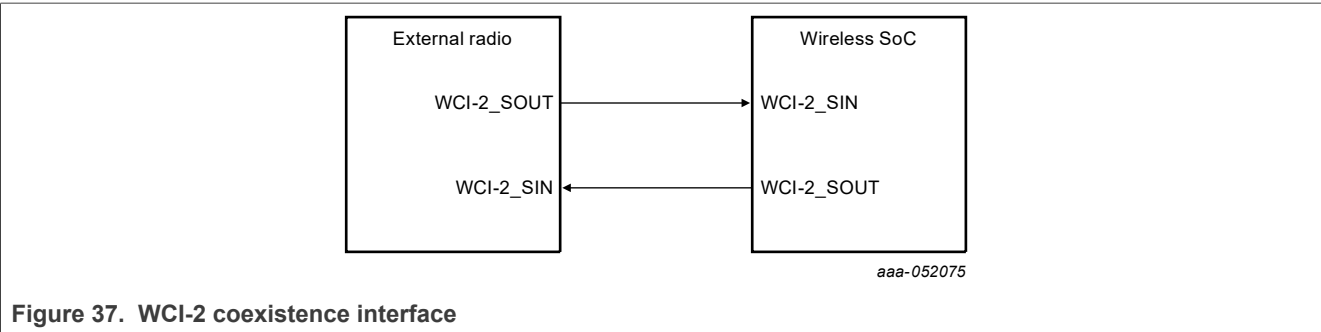

11.6.1.2 WCI-2 messages

WCI-2 coexistence interface supports the messages defined in Bluetooth Core Specification Vol 7 Part C for request and grant, where:

- The real time message from the external radio to IW693P indicates the request to operate ([Figure 38](#))
 - MWS_Rx=1 indicates an external radio request to Rx
 - MWS_Tx=1 indicates an external radio request to Tx

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
0	0	0	FRAME_SYNC	MWS_RX	MWS_TX	MWS_PATTERN[0]	MWS_PATTERN[1]

aaa-052076

Figure 38. Type 0: Real time signaling message - external radio to IW693P

- The external radio can send an optional second message following the real time message to indicate the traffic priority using the vendor specific message ([Figure 39](#)). Otherwise, the priority is set via a BCA register.

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
1	1	1	0	MWS_TX_PRI[0]	MWS_TX_PRI[1]	MWS_RX_PRI[0]	MWS_RX_PRI[1]

aaa-052077

Figure 39. Type 7: Vendor specific message - external radio to IW693P

- The real time message from IW693P to the external radio indicates the arbitration results ([Figure 40](#)):
 - BT_Rx_Pri = 1: the Bluetooth radio Rx wins the arbitration and is in operation
 - BT_Tx_On = 1: the Bluetooth radio Tx wins the arbitration and is in operation
 - 802_Rx_Pri = 1: Wi-Fi Rx wins the arbitration and is in operation
 - 802_Tx_On = 1: Wi-Fi Tx wins the arbitration and is in operation
 - Otherwise, the external radio is granted

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
0	0	0	NB_RX_PRI	NB_TX_ON	802_RX_PRI	802_TX_ON	RFU

aaa-052078

Figure 40. Type 0: Real time signaling message - IW693P to external radio

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

WCI-2 coexistence interface supports the messages defined in Bluetooth Core Specification Vol 7 Part C for other purposes, such as:

- Transport control message from IW693P to the external radio to request real time message upon wake up (Figure 41)

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
0	0	1	Resend_real_time	RFU	RFU	RFU	RFU

aaa-052079

Figure 41. Type 1: Transport control message time signaling message - IW693P to external radio

- MWS inactivity duration message from the external radio to IW693P indicates the inactivity duration to IW693P before going to sleep (Figure 42)

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
0	1	1	Duration[0]	Duration[1]	Duration[2]	Duration[3]	Duration[4]

aaa-052081

Figure 42. MWS inactivity duration message

- MWS scan frequency message from the external radio to IW693P indicates the external radio scan frequency to IW693P (Figure 43)

Type(0)	Type(1)	Type(2)	MSG(0)	MSG(1)	MSG(2)	MSG(3)	MSG(4)
1	0	0	Freq[0]	Freq[1]	Freq[2]	Freq[3]	Freq[4]

aaa-052080

Figure 43. Type 5: MWS scan frequency message

11.6.1.3 WCI-2 signal waveform format

The messaging is based on a standard UART format.

[Figure 44](#) shows the waveform for the transmit signal (UART_SOUT to UART_SIN).

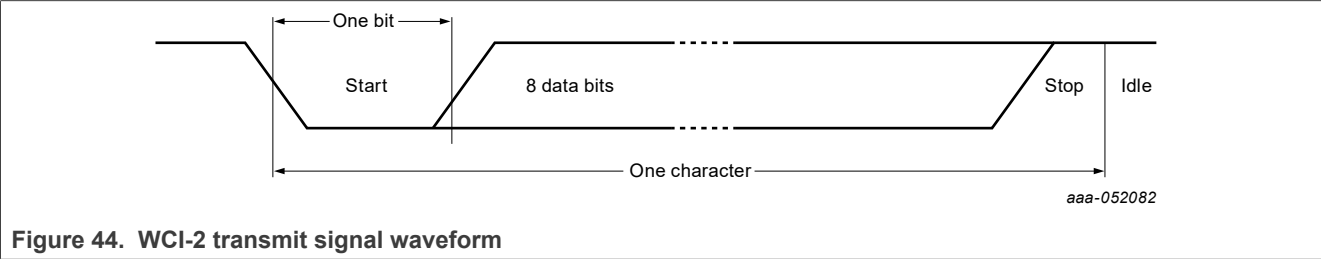


Table 61. WCI-2 interface transport settings

Parameter	Range	Note
Baud rate	921600 ~ 4000000	Baud
Data bits	8	LSB first
Parity bits	0	No parity
Stop bit	1	One stop bit
Flow control	No	No flow control

11.6.2 PTA interface coexistence specifications

This section illustrates how the central hardware packet traffic arbiter samples the interface signals. The sampling is based on which interface signals are being used.

Figure 45 shows PTA coexistence interface signal timing diagram for the example where:

- Input: request, 1-bit priority
 - Priority ready at Request signal assertion
- Output: grant

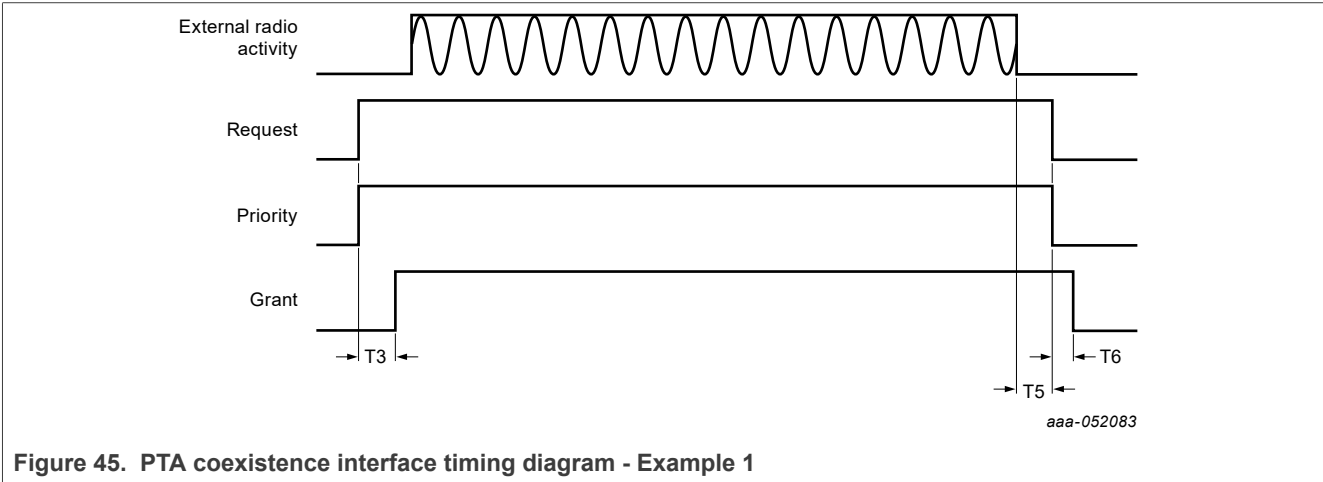


Figure 46 shows PTA coexistence interface timing diagram for the example where:

- Input: request, 1-bit priority, state
 - Priority signal and State signal are ready at Request signal assertion
- Output: grant

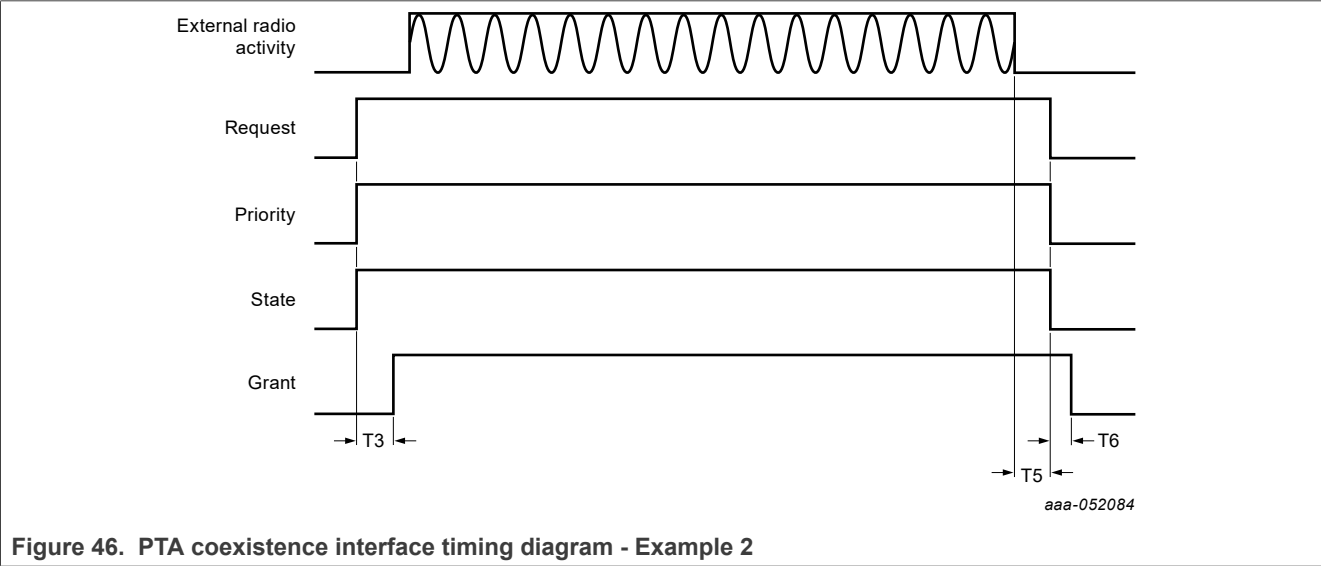


Figure 47 shows PTA coexistence interface timing diagram for the example where:

- Input: request, 1-bit priority, frequency, state
 - Priority, State, and Frequency ready at Request assertion
- Output: grant

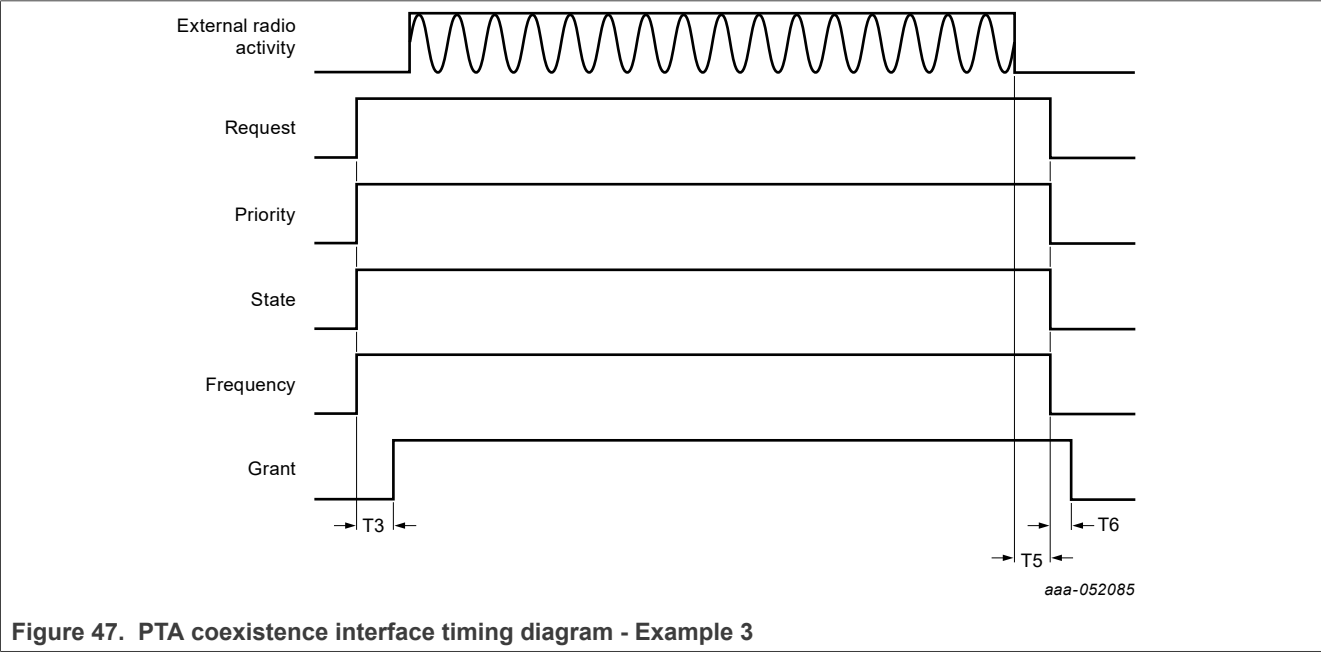


Figure 48 shows PTA coexistence interface timing diagram for the example where:

- Input: request, 1-bit priority
 - Priority signal is ready at Request signal assertion
- Output: grant
 - Grant signal is de-asserted before Request signal de-assertion due to a traffic abort caused by other traffic with higher priority

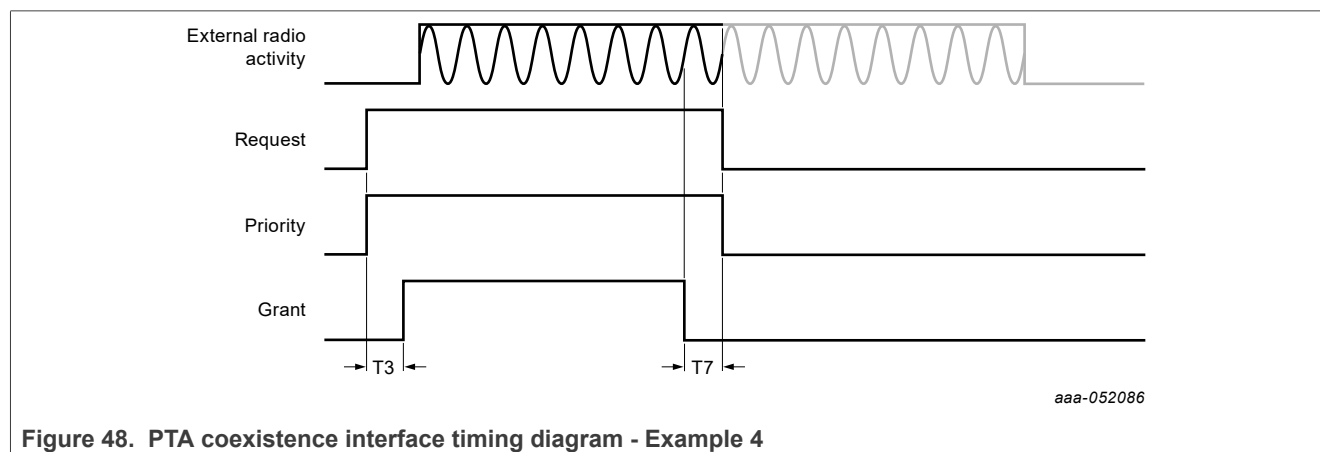


Figure 49 shows PTA coexistence interface timing diagram for the example where:

- Input: request and priority
 - Priority pin is sampled three times to obtain two priority bits and Tx/Rx info. No input from State pin.
- Output: grant

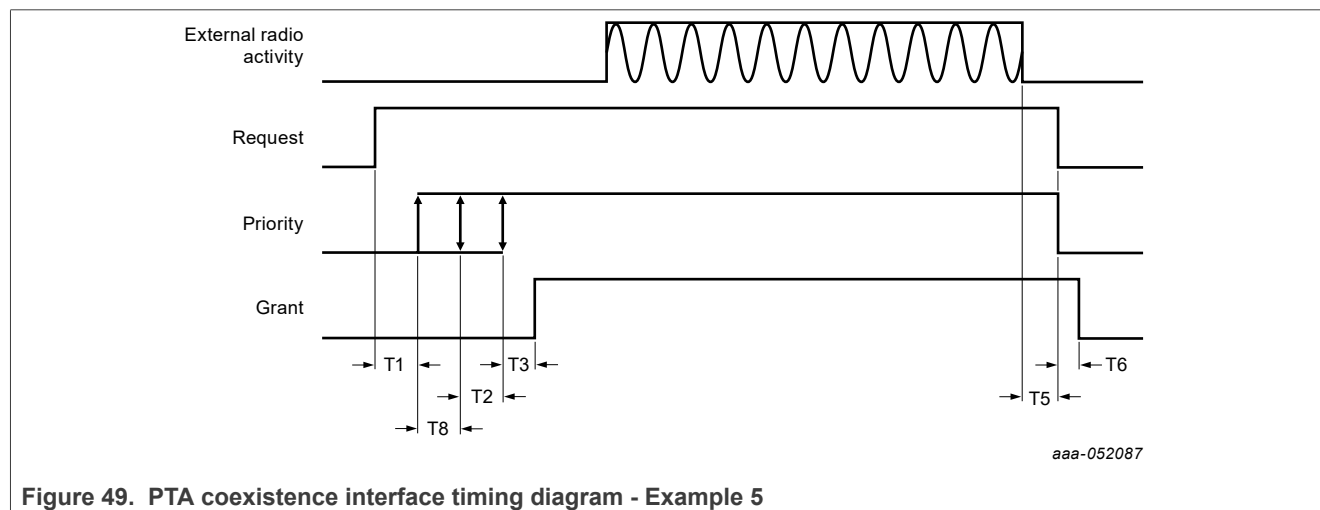


Figure 49. PTA coexistence interface timing diagram - Example 5

[Table 62](#) provides the timing specifications for PTA coexistence interface signals.

Table 62. PTA coexistence interface signal timing data

Parameter ^[1]	Conditions	Min	Typ.	Max	Unit
T1	Priority[0] is sampled on Priority pin at T1 from Request assertion.	0	—	100	μs
T8	Optional: priority[1], if present on Priority pin, is sampled at T1+T8 from Request assertion.	0.025	—	100	μs
T2	Optional: Tx/Rx Info, if present on Priority pin, is sampled at T1+T2 (one priority bit on Priority pin) or T1+T8+T2 (two priority bits on Priority pin) from Request assertion.	0.025	—	100	μs
T3	Time from all information available to BCA to grant decision ready	0.1	—	0.4	μs
T5	The Request signal de-asserts T5 after the last symbol is done	—	—	—	μs
T6	The Grant signal de-asserts T6 after the Request de-assertion	0.1	—	0.3	μs
T7	The Request signal de-asserts T7 after the grant de-assertion due to a traffic abort.	—	—	—	μs

[1] T1, T2, and T8 are valid for serially sampled Priority pin.
T3, T5, T6, and T7 are valid for all implementations.

11.7 Host configuration specifications

For a list of configuration pins, see [Section 6.5.15 "Host configuration"](#).

Table 63. Configuration pin specifications^[1]

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Parameter	Condition	Min	Typ	Max	Unit
Internal weak pull-up resistance	Around 1 ms following any reset	--	800	--	kΩ
Internal nominal pull-up resistance	Around 1 ms following any reset	--	100	--	kΩ

[1] After approximately 1 ms, the configuration pins become functional pins.

11.8 Reference clock specifications

11.8.1 External crystal specifications

Table 64. External crystal specifications
Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Parameter	Condition	Min	Typ	Max	Unit
Fundamental frequencies	—	—	40	—	MHz
Resonance mode	—	—	A1, Fundamental	—	—
Equivalent differential load capacitance	—	7	8	9	pF
Shunt capacitance	—	—	2	—	pF
Frequency tolerance	Over process at 25°C	-10	—	+10	ppm
Frequency stability	Over operating temperature	-10	—	+10	ppm
Aging	—	-2	—	+2	ppm/ 5 years
Series resistance (ESR)	40 MHz	—	—	40	Ω
Insulation resistance	at DC 100V	500	—	—	MΩ
Maximum drive level	—	120	—	—	μW

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

11.8.2 External crystal oscillator specifications

The reference clock from external crystal oscillator requires CMOS input signal or a clipped sinusoidal signal.

Table 65. Clock DC specifications^[1]

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Parameter	Condition	Min	Typ	Max	Unit
Single-ended high-level voltage	—	—	—	1.8	V
Single-ended low-level voltage	—	0	—	—	V
Clock amplitude (pk-pk) ^[2]	—	0.5	—	1.8	V
Mid-point slope	—	125	—	—	MV/s

[1] AC-coupling capacitor is integrated into IW693P.

[2] Minimum 0.8V for clipped sinusoidal signal.

Table 66. 40 MHz clock timing

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Parameter	Condition	Min	Typ	Max	Unit
XO40 period	—	25.00 - 20 ppm	25.00	25.00 + 20 ppm	ns
XO40 rise time	—	—	2.00	—	ns
XO40 fall time	—	—	2.00	—	ns
XO40 duty cycle	—	47	50	53	%

Table 67. Phase noise

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Parameter	Test Conditions	Min	Typ	Max	Unit
Fref = 40 MHz	Offset = 1 kHz	—	—	-130	dBc/Hz
	Offset = 10 kHz	—	—	-145	dBc/Hz
	Offset = 100 kHz	—	—	-158	dBc/Hz
	Offset > 1 MHz	—	—	-162	dBc/Hz

11.9 Power-down specifications

11.9.1 PDn asserted low—Power supplies remain high

Figure 50 and Table 68 show the specifications for PDn signal when it is asserted (low) while all power supplies to the device are high.

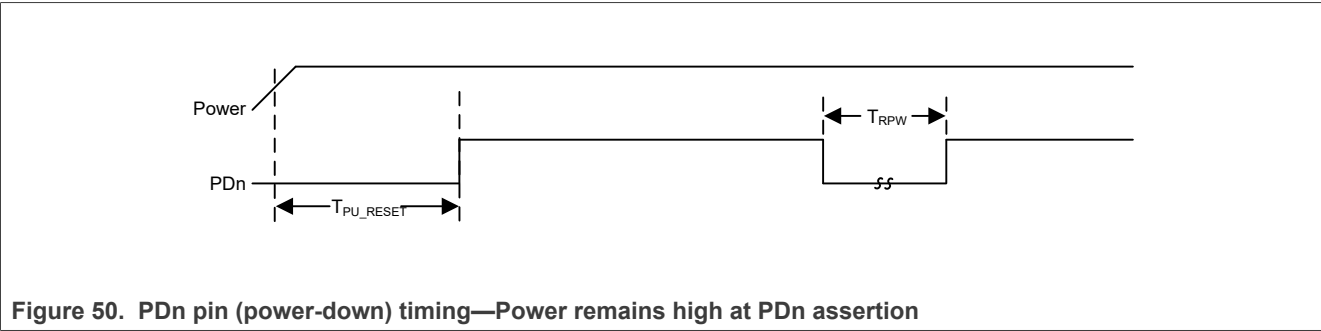


Table 68. PDn pin (power-down) specifications—Power remains high at PDn assertion

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
T _{PU_RESET}	Valid power to PDn de-asserted	—	0	—	—	ms
T _{RPW}	PDn pulse width	—	1 ^[1]	—	—	μs
V _{IH}	Input high voltage	—	1.4	—	4.5	V
V _{IL}	Input low voltage	—	-0.4	—	0.5	V

[1] Minimum value guaranteed for a valid reset. Smaller values may put the device in an undefined state.

11.10 JTAG interface specifications

The test interface pins are powered by VIO voltage supply.

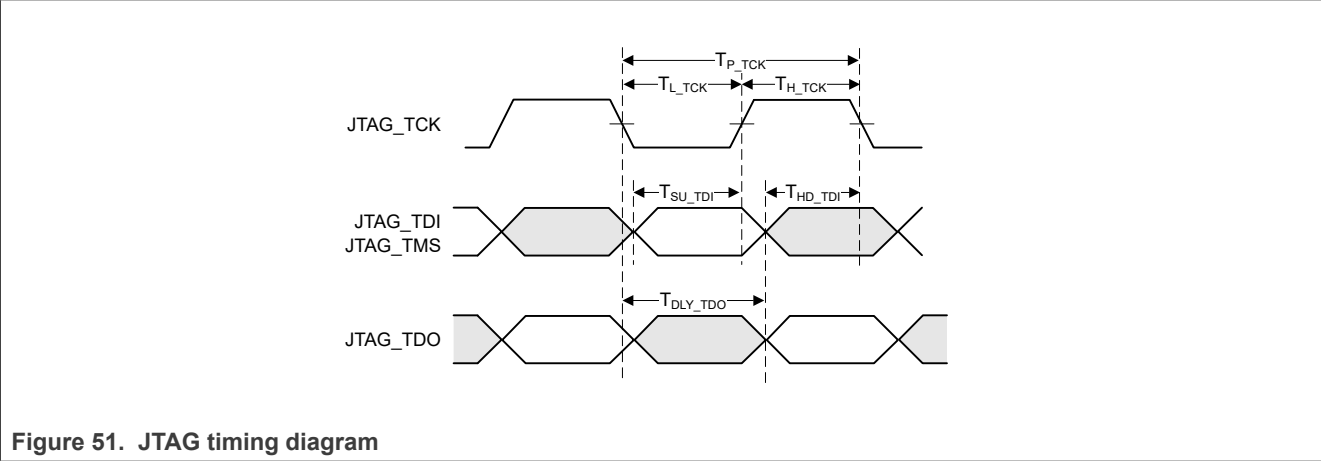


Figure 51. JTAG timing diagram

Table 69. JTAG timing data^[1]

Unless otherwise specified, the values apply per [Section 9 "Recommended operating conditions"](#)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
T_{P_TCK}	TCK period	—	40	—	—	ns
T_{H_TCK}	TCK high	—	12	—	—	ns
T_{L_TCK}	TCK low	—	12	—	—	ns
T_{SU_TDI}	TDI, TMS to TCK setup time	—	10	—	—	ns
T_{HD_TDI}	TDI, TMS to TCK hold time	—	10	—	—	ns
T_{DLY_TDO}	TCK to TDO delay	—	0	—	15	ns

[1] Does not apply to JTAG enabled by the JTAG_TMS pin.

12 Package information

12.1 Package thermal conditions

12.1.1 HVQFN thermal conditions

Table 70. Package thermal conditions—HVQFN148

Symbol	Rating	Board type ^[1]	Value	Unit
Rthj-a/θja	Junction to ambient thermal resistance ^[2]	JESD51-9, 2s2p board	25	°C/W
Psij-top/Ψj-top	Junction to top of package thermal characterization parameter ^[2]	JESD51-9, 2s2p board	0.9	°C/W

[1] The thermal test board meets JEDEC specification for this package (JESD51-9).

[2] Determined in accordance to JEDEC JESD51-2A natural convection environment. Thermal resistance data in this report is solely for a thermal performance comparison of one package to another in a standardized specified environment. It is not meant to predict the performance of a package in an application-specific environment.

12.2 Package mechanical drawings

Table 71. Package information

Package name	Link to package information on NXP website
HVQFN148	SOT-2111-4

12.2.1 HVQFN mechanical drawing

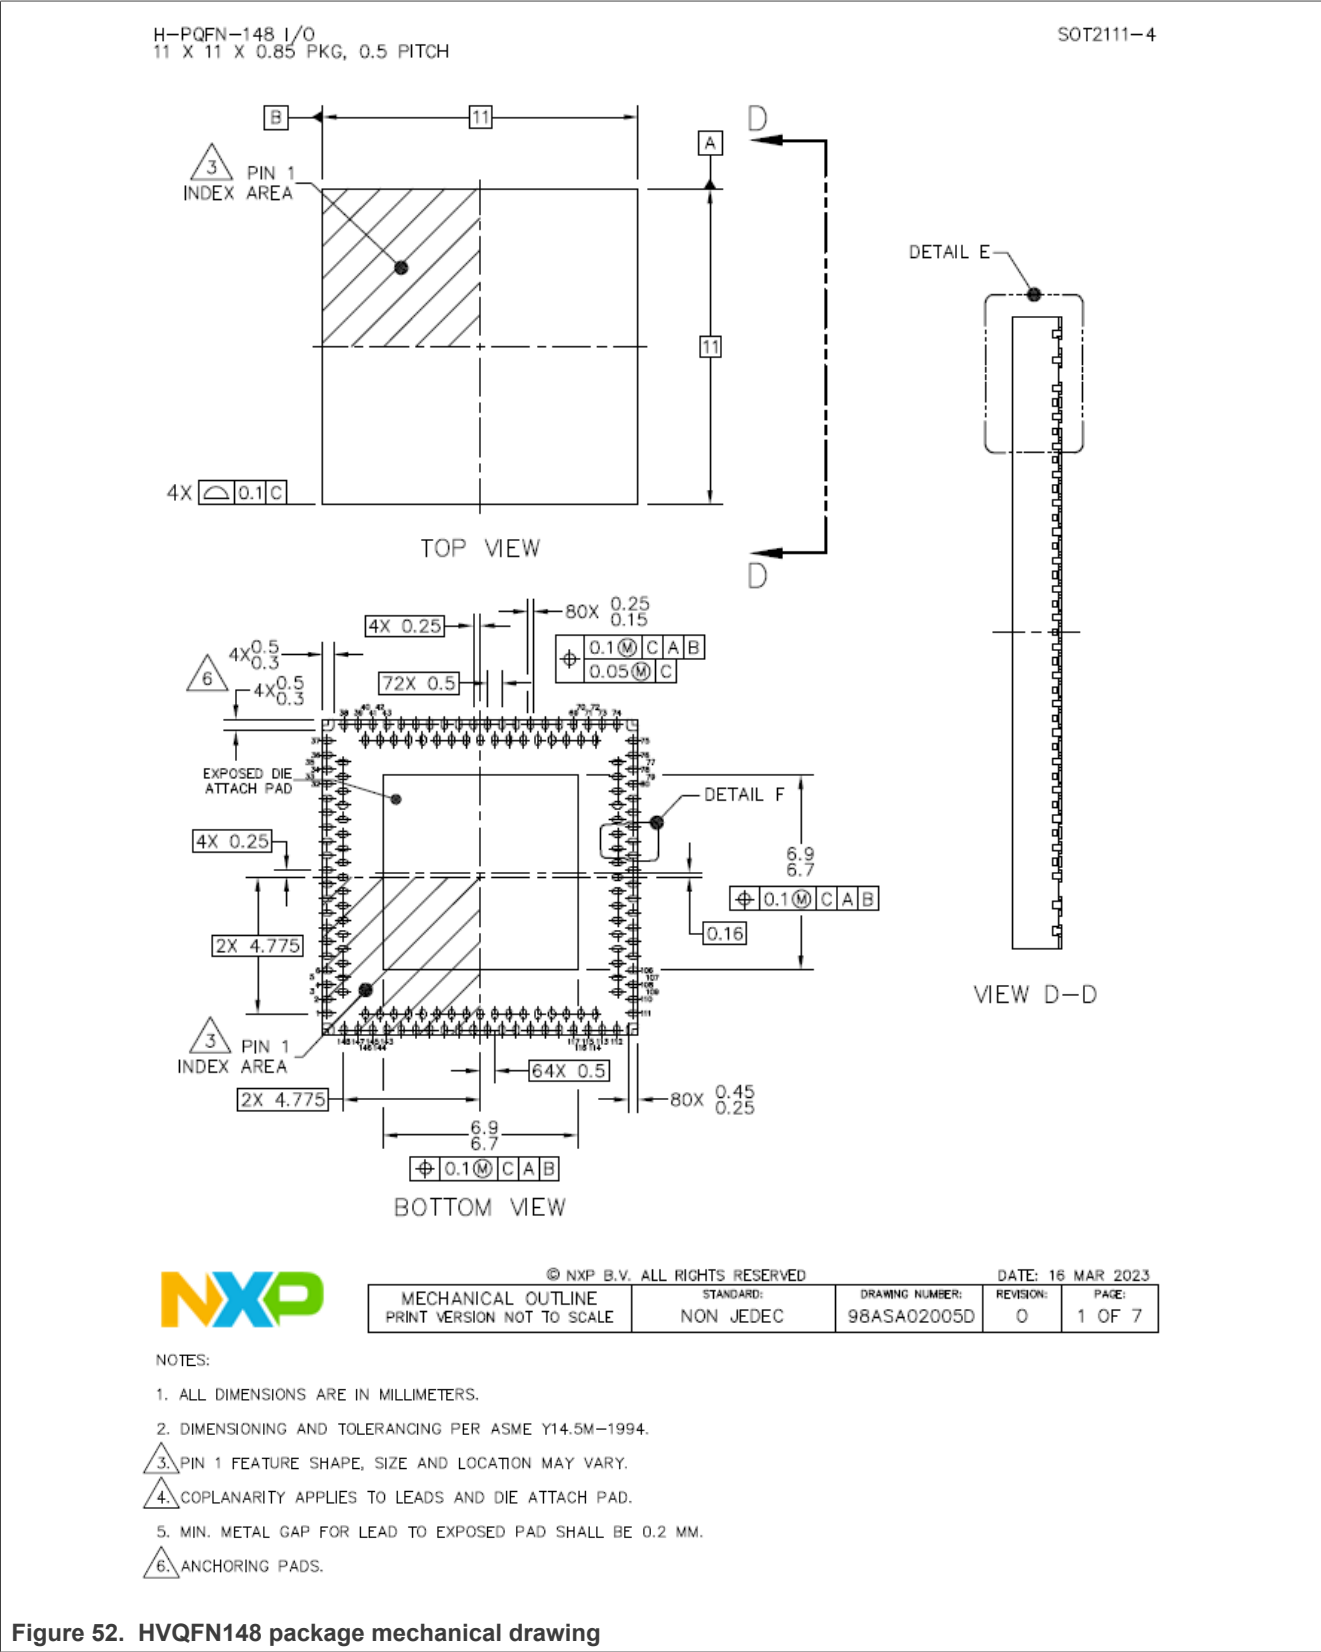


Figure 52. HVQFN148 package mechanical drawing

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution


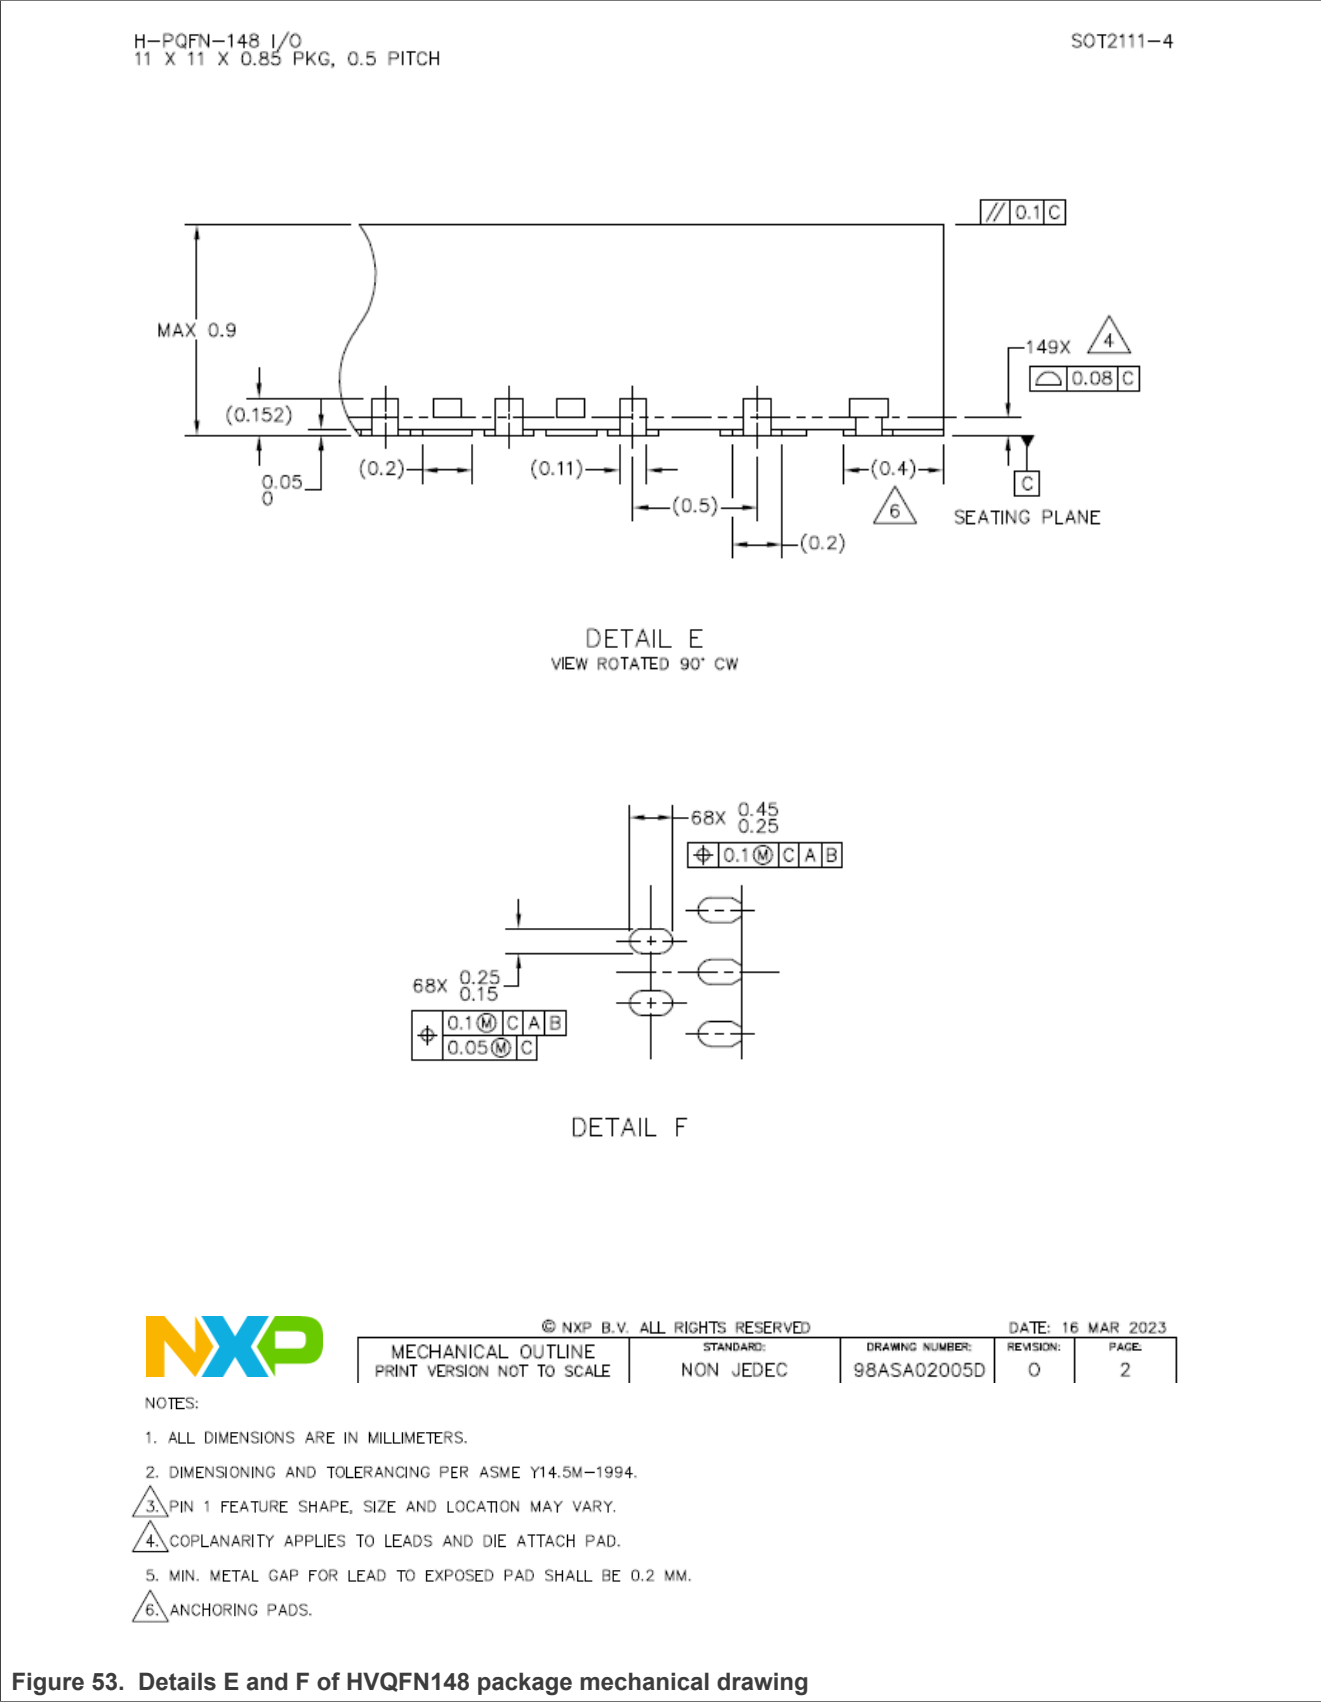


Figure 53. Details E and F of HVQFN148 package mechanical drawing

12.3 Package marking

12.3.1 HVQFN marking

IW693P marking for HVQFN package and PCIe host interface for Wi-Fi.

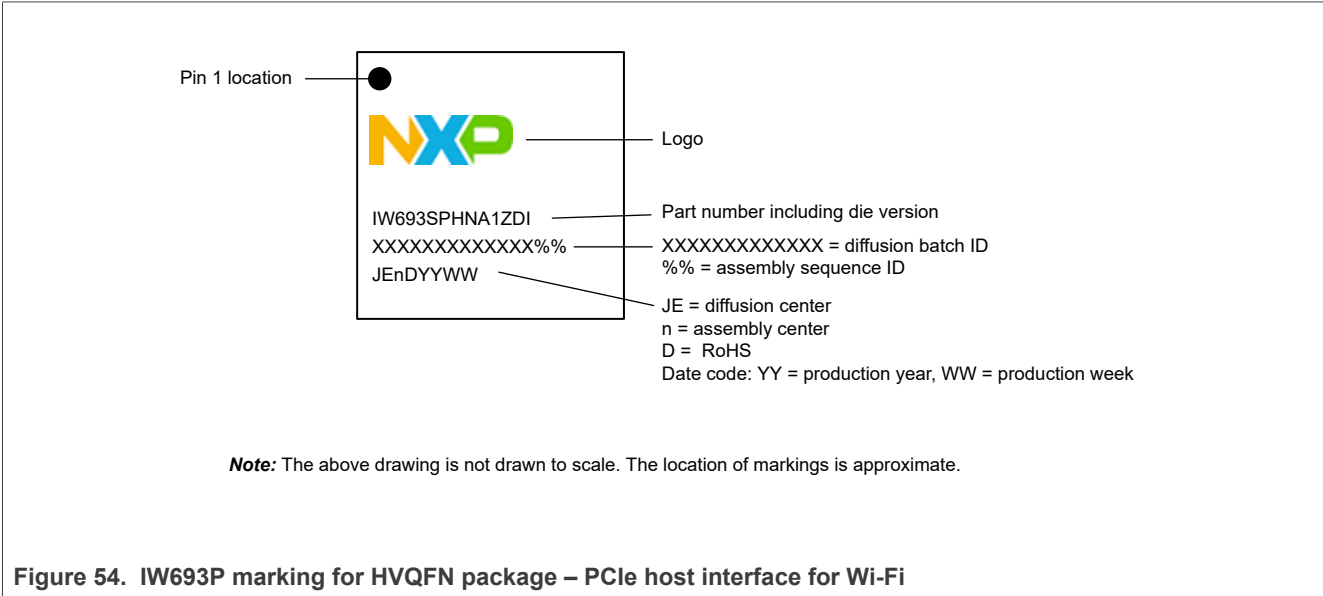

13 Abbreviations

Table 72. Abbreviations

Abbreviation	Definition
A2DP	Advanced audio distribution profiles
ACK	Acknowledgment
ADC	Analog-to-digital converter
AES	Advanced encryption standard
AFH	Adaptive frequency hopping
AGC	Automatic gain control
AP	Access point
Arm	Advanced RISC machine
BDR	Basic data rate
BOM	Bill of materials
BRF	Bluetooth RF unit
BSS	Basic service set
BTM	BSS transition management
CBC	Cipher block chaining
CCA	Clear channel assessment
CCK	Complementary code keying
CCMP	Counter mode CBC-MAC protocol
CMD	Command
CRC	Cyclic redundancy check
CTS	Clear to send
DAC	Digital-to-analog converter
DCF	Distributed coordination function
DFS	Dynamic frequency selection
DMA	Direct memory access
DPD	Digital pre distortion
DQPSK	Differential quadrature phase shift keying
DTIM	Delivery traffic indication message
EAP	Extensible authentication protocol
ED	Energy detect
EDCA	Enhanced distributed channel access
FIFO	First in first out
GATT	Generic attribute profile
GCMP	Galois/counter mode protocol
GI	Guard interval

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 72. Abbreviations...continued

Abbreviation	Definition
GPIO	General purpose input/output
HID	Human interface device
HT	High throughput
HVQFN	Thermal enhanced very thin quad flat package
HW	Hardware
I/F	Interface
I/Q	In-phase/quadrature
IEEE	Institute of electrical and electronics engineers
JEDEC	Joint electronic device engineering council
JTAG	Joint test action group
LC3	Low complexity communication codec
LDPC	Low density parity check
LE	Low energy
LED	Light emitting diode
LNA	Low noise amplifier
LSB	Least significant byte
LTE	Long term evolution
MAC	Media/medium access controller
MCS	Modulation and coding scheme
MFP	Multi functional pin
MIMO	Multiple input multiple output
MPDU	MAC protocol data unit
MSb	Most significant bit
MSB	Most significant byte
MU-MIMO	Multi user MIMO
MU-PPDU	Multi user PPDU
MWS	Mobile wireless system Multimedia wireless system
NAV	Network allocation vector
NBS	Narrow band speech
NDP	Null data packet
Nsts	Number of space time streams
OFDM	Orthogonal frequency division multiplexing
OFDMA	Orthogonal frequency division multiple access
OTP	One time programmable
OTT	Over-the-top (device)

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 72. Abbreviations...continued

Abbreviation	Definition
PA	Power amplifier
PCI	Peripheral component interconnect
PCM	Pulse code modulation
PDn	Power down
PHY	Physical layer
POS	Point of sale
PPDU	PHY protocol data unit
PSK	Pre shared keys
PTA	Packet traffic arbitration
QAM	Quadrature amplitude modulation
QFN	Quad flat non-leaded package
RF	Radio frequency
RIFS	Reduced inter frame space
RISC	Reduced instruction set computer
RSSI	Receiver signal strength indication
RTC	Real time clock
RTS	Request to send
SISO	Single input single output
SoC	System-on-chip
SPDT	Single pole double throw
SPI	Serial peripheral interface
STA	Station
TA	Transmitter address
TCP/IP	Transmission control protocol/internet protocol
TKIP	Temporal key integrity protocol
TWT	Target wake time
UART	Universal asynchronous receiver/transmitter
UDP	User datagram protocol
VHT	Very high throughput
WAP	Wireless application protocol
WBS	Wide band speech
WCI-2	Wireless coexistence interface 2
WEP	Wired equivalent privacy
Wi-Fi	Hardware implementation of IEEE 802.11 for wireless connectivity
WLAN	Wireless local area network
WPA	Wi-Fi protected access

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 72. Abbreviations...continued

Abbreviation	Definition
WPA2	Wi-Fi protected access 2
WPA2-PSK	Wi-Fi protected access 2 - pre shared key
WPA3	Wi-Fi protected access 3
WPA-PSK	Wi-Fi protected access - pre shared key
XOSC	Crystal oscillator

14 Appendix

14.1 Wi-Fi channel list

[Table 73 "List of supported Wi-Fi channels"](#) lists the channels for 2.4 GHz, 5 GHz, and 6 GHz Wi-Fi.

Table 73. List of supported Wi-Fi channels

Channel number	Frequency	Channel number	Frequency	Channel number	Frequency
2.4 GHz channel					
1	2412 MHz	2	2417 MHz	3	2422 MHz
4	2427 MHz	5	2432 MHz	6	2437 MHz
7	2442 MHz	8	2447 MHz	9	2452 MHz
10	2457 MHz	11	2462 MHz	12	2467 MHz
13	2472 MHz	—	—	—	—
5 GHz channel					
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	52	5260 MHz	56	5280 MHz
60	5300 MHz	64	5320 MHz	100	5500 MHz
104	5520 MHz	108	5540 MHz	112	5560 MHz
116	5580 MHz	120	5600 MHz	124	5620 MHz
128	5640 MHz	132	5660 MHz	136	5680 MHz
140	5700 MHz	144	5720 MHz	149	5745 MHz
153	5765 MHz	157	5785 MHz	161	5805 MHz
165	5825 MHz	169	5845 MHz	173	5865 MHz
177	5885 MHz	—	—	—	—
6 GHz channel					
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	6495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Table 73. List of supported Wi-Fi channels...continued

Channel number	Frequency	Channel number	Frequency	Channel number	Frequency
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	233	7115 MHz	—	—

15 Revision history

Table 74. Revision history

Document ID	Release date	Description
IW693P v.2.0	2 July 2025	Product data sheet - Changed the access to public. - No changes in the content.
IW693P v.1.0	25 June 2025	Product data sheet Changes implemented since the release of IW693 v.1.0 Product overview Section 1 "Product overview": updated the paragraph about security. Ordering information Section 2 "Ordering information": updated. Wi-Fi subsystem Section 3.2 "Wi-Fi MAC": added Wireless Multi-stream feature. Pin information Section 6.6 "Configuration pins ": updated. Package information Section 12.3.1 "HVQFN marking": updated.
IW693 v.1.0	14 March 2025	Objective data sheet Initial version

Legal information

Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
[2] The term 'short data sheet' is explained in section "Definitions".
[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <https://www.nxp.com>.

Definitions

Draft — A draft status on a document indicates that the content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included in a draft version of a document and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Suitability for use in non-automotive qualified products — Unless this document expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

HTML publications — An HTML version, if available, of this document is provided as a courtesy. Definitive information is contained in the applicable document in PDF format. If there is a discrepancy between the HTML document and the PDF document, the PDF document has priority.

Translations — A non-English (translated) version of a document, including the legal information in that document, is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

Security — Customer understands that all NXP products may be subject to unidentified vulnerabilities or may support established security standards or specifications with known limitations. Customer is responsible for the design and operation of its applications and products throughout their lifecycles to reduce the effect of these vulnerabilities on customer's applications and products. Customer's responsibility also extends to other open and/or proprietary technologies supported by NXP products for use in customer's applications. NXP accepts no liability for any vulnerability. Customer should regularly check security updates from NXP and follow up appropriately.

Customer shall select products with security features that best meet rules, regulations, and standards of the intended application and make the ultimate design decisions regarding its products and is solely responsible for compliance with all legal, regulatory, and security related requirements concerning its products, regardless of any information or support that may be provided by NXP.

NXP has a Product Security Incident Response Team (PSIRT) (reachable at PSIRT@nxp.com) that manages the investigation, reporting, and solution release to security vulnerabilities of NXP products.

NXP B.V. — NXP B.V. is not an operating company and it does not distribute or sell products.

Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

NXP — wordmark and logo are trademarks of NXP B.V.

Bluetooth — the Bluetooth wordmark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by NXP Semiconductors is under license.

EdgeLock — is a trademark of NXP B.V.

Tables

Tab. 1.	Supported modes - Three-antenna configuration	3	Tab. 41.	2.4 GHz Wi-Fi transmitter performance – 2A/2B RF paths	73
Tab. 2.	Supported modes – Two-antenna configuration	5	Tab. 42.	2.4 GHz Wi-Fi transmitter performance – 2A/2B RF paths	74
Tab. 3.	Host interface options	6	Tab. 43.	5 GHz Wi-Fi transmitter performance – 5A/5B RF paths	75
Tab. 4.	Part order codes	9	Tab. 44.	6 GHz Wi-Fi transmitter performance – 5A/5B RF paths	76
Tab. 5.	Pin types	31	Tab. 45.	Bluetooth/Bluetooth LE receiver performance	77
Tab. 6.	Pin list by number – PCIe host interface for Wi-Fi	32	Tab. 46.	Bluetooth/Bluetooth LE transmitter performance	80
Tab. 7.	General purpose I/O (MFP)	38	Tab. 47.	Current consumption values	82
Tab. 8.	RF front-end control interface	42	Tab. 48.	DC electrical specifications—1.8V operation (VIO)	91
Tab. 9.	Wi-Fi radio interface	43	Tab. 49.	DC electrical specifications—3.3V operation (VIO)	91
Tab. 10.	Bluetooth radio interface	43	Tab. 50.	LED mode data	91
Tab. 11.	PCIe host interface (MFP)	44	Tab. 51.	DC electrical specifications—1.8V operation (VIO_RF)	92
Tab. 12.	UART host interface (MFP)	45	Tab. 52.	DC electrical specifications—3.3V operation (VIO_RF)	92
Tab. 13.	Audio interface pins	45	Tab. 53.	DC electrical specifications—1.8 V and 3.3V operation (PCIE_WAKEn, PCIE_CLKREQn)	93
Tab. 14.	PTA coexistence interface (MFP)	46	Tab. 54.	PCI express TX output specifications data —2.5 GT/s	93
Tab. 15.	WCI-2 coexistence interface - Option 1	46	Tab. 55.	PCI express RX input specifications data—2.5 GT/s	94
Tab. 16.	WCI-2 coexistence interface - Option 2	46	Tab. 56.	UART timing data	95
Tab. 17.	UART coexistence interface	47	Tab. 57.	I2S timing specification data—Centra mode	96
Tab. 18.	Debug UART coexistence interface - Option 1	47	Tab. 58.	I2S timing specification data—Peripheral mode	97
Tab. 19.	Debug UART coexistence interface - Option 2	47	Tab. 59.	PCM timing specification data—Central mode	98
Tab. 20.	Wake-up/interrupt interface	48	Tab. 60.	PCM timing specification data—Peripheral mode	99
Tab. 21.	Software reset interface	48	Tab. 61.	WCI-2 interface transport settings	103
Tab. 22.	Host configuration	49	Tab. 62.	PTA coexistence interface signal timing data	109
Tab. 23.	Clock interface	49	Tab. 63.	Configuration pin specifications	109
Tab. 24.	Power down pin	50	Tab. 64.	External crystal specifications	110
Tab. 25.	Power supply and ground pins	51	Tab. 65.	Clock DC specifications	111
Tab. 26.	JTAG interface pins (MFP)	52	Tab. 66.	40 MHz clock timing	111
Tab. 27.	Configuration pins	53	Tab. 67.	Phase noise	111
Tab. 28.	Host configuration options for IW693P	53	Tab. 68.	PDn pin (power-down) specifications—Power remains high at PDn assertion	112
Tab. 29.	Power-up timing parameters – Internal PA (VPA/VIO/VIO_RF = 3.3 V)	55	Tab. 69.	JTAG timing data	113
Tab. 30.	Power-up timing parameters – Internal PA (VIO/VIO_RF = 1.8 V, VPA = 3.3 V)	56	Tab. 70.	Package thermal conditions—HVQFN148	114
Tab. 31.	Power-up timing parameters - External PA	57	Tab. 71.	Package information	115
Tab. 32.	Power-down timing parameters - when using internal PA	58	Tab. 72.	Abbreviations	119
Tab. 33.	Power-down timing parameters - External PA	59	Tab. 73.	List of supported Wi-Fi channels	123
Tab. 34.	Absolute maximum ratings	61	Tab. 74.	Revision history	125
Tab. 35.	Limiting values	61			
Tab. 36.	Recommended operating conditions	62			
Tab. 37.	2.4 GHz Wi-Fi receiver performance – 2A/2B RF paths	64			
Tab. 38.	2.4 GHz Wi-Fi receiver performance – 2C RF path	66			
Tab. 39.	5 GHz Wi-Fi receiver performance - 5A/5B RF paths	68			
Tab. 40.	6 GHz Wi-Fi receiver performance – 5A/5B RF paths	71			

Figures

Fig. 1.	IW693P application diagram – Mode 1 and internal PA/LNA/SW (three antennas)	2	Fig. 28.	I2S timing specification diagram for data signals—Central mode	96
Fig. 2.	IW693P application diagram – Mode 1 and front-end modules (FEM) PA/LNA/SW (three antennas)	2	Fig. 29.	I2S timing specification diagram for clock signals—Central mode	96
Fig. 3.	IW693P application diagram – Mode 1 and internal PA/LNA/SW (two antennas)	4	Fig. 30.	I2S timing specification diagram for data signals—Peripheral mode	97
Fig. 4.	IW693P application diagram – Mode 1 and front-end modules (FEM) PA/LNA/SW (two antennas)	4	Fig. 31.	I2S timing specification diagram for clock signal—Peripheral mode	97
Fig. 5.	IW693P internal block diagram	8	Fig. 32.	PCM timing specification diagram for data signals—Central mode	98
Fig. 6.	IW693P part numbering scheme	9	Fig. 33.	PCM timing specification diagram for PCM_SYNC signal—Central mode	98
Fig. 7.	I2S interface protocol	18	Fig. 34.	PCM timing specification diagram for data signals—Peripheral mode	99
Fig. 8.	I2S timing specification diagram—Mono channel mode	19	Fig. 35.	PCM timing specification diagram for PCM_SYNC signal—Peripheral mode	99
Fig. 9.	I2S timing specification diagram—Dual channel mode	19	Fig. 36.	UART waveform	100
Fig. 10.	PCM short frame sync	21	Fig. 37.	WCI-2 coexistence interface	100
Fig. 11.	PCM mono channel mode (short frame sync)	22	Fig. 38.	Type 0: Real time signaling message - external radio to IW693P	101
Fig. 12.	PCM dual channel mode (short frame sync) ...	22	Fig. 39.	Type 7: Vendor specific message - external radio to IW693P	101
Fig. 13.	PCM burst with two PCM slots - PCM short frame sync	23	Fig. 40.	Type 0: Real time signaling message - IW693P to external radio	101
Fig. 14.	Hardware coexistence interface - WCI-2 coexistence interface	25	Fig. 41.	Type 1: Transport control message time signaling message - IW693P to external radio	102
Fig. 15.	Hardware coexistence interface - PTA external coexistence interface	26	Fig. 42.	MWS inactivity duration message	102
Fig. 16.	Hardware coexistence interface - Coex-UART external coexistence interface	27	Fig. 43.	Type 5: MWS scan frequency message	102
Fig. 17.	Hardware coexistence interface - Debug-UART external coexistence interface	28	Fig. 44.	WCI-2 transmit signal waveform	103
Fig. 18.	IW693P signal diagram	29	Fig. 45.	PTA coexistence interface timing diagram - Example 1	104
Fig. 19.	IW693P pin assignment (package top view) – PCIe host interface for Wi-Fi	30	Fig. 46.	PTA coexistence interface timing diagram - Example 2	105
Fig. 20.	Internal buck connections	54	Fig. 47.	PTA coexistence interface timing diagram - Example 3	106
Fig. 21.	Power-up timing diagram – Internal PA (VPA/VIO/VIO_RF = 3.3 V)	55	Fig. 48.	PTA coexistence interface timing diagram - Example 4	107
Fig. 22.	Power-up timing diagram – Internal PA (VIO/VIO_RF = 1.8 V, VPA = 3.3 V)	56	Fig. 49.	PTA coexistence interface timing diagram - Example 5	108
Fig. 23.	Power-up timing diagram – External PA (VPA = 3.3 V)	57	Fig. 50.	PDn pin (power-down) timing—Power remains high at PDn assertion	112
Fig. 24.	Power-down timing diagram when using internal PA (VPA = 3.3 V)	58	Fig. 51.	JTAG timing diagram	113
Fig. 25.	Power-down timing diagram - External PA (VPA = 3.3 V)	59	Fig. 52.	HVQFN148 package mechanical drawing	116
Fig. 26.	RF performance measurement points	63	Fig. 53.	Details E and F of HVQFN148 package mechanical drawing	117
Fig. 27.	UART timing diagram	95	Fig. 54.	IW693P marking for HVQFN package – PCIe host interface for Wi-Fi	118

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

Contents

1	Product overview	1	6.5.14	Software reset interface	48
1.1	Applications	6	6.5.15	Host configuration	49
1.2	Wi-Fi key features	6	6.5.16	Clock interface	49
1.3	Bluetooth key features	6	6.5.17	Power down pin	50
1.4	Host interfaces	6	6.5.18	Power supply and ground pins	51
1.5	Operating characteristics	7	6.5.19	JTAG interface	52
1.6	General features	7	6.6	Configuration pins	53
1.7	Internal block diagram	8	7	Power information	54
2	Ordering information	9	7.1	Internal buck regulator	54
3	Wi-Fi subsystem	10	7.2	Power-up sequence	55
3.1	IEEE 802.11 standards	10	7.3	Power-down sequence	58
3.2	Wi-Fi MAC	11	7.4	Reset	60
3.3	Wi-Fi baseband	12	8	Absolute maximum ratings	61
3.4	Wi-Fi radio	15	9	Recommended operating conditions	62
3.5	Wi-Fi encryption	15	10	Radio specifications	63
3.6	Transmit Beamforming (TxBF)	15	10.1	Wi-Fi radio specifications	63
3.7	RF channels	15	10.1.1	Wi-Fi radio performance measurement	63
3.8	Wi-Fi host interfaces	15	10.1.2	2.4 GHz Wi-Fi receiver performance -	
4	Bluetooth subsystem	16		2A/2B RF paths	64
4.1	Bluetooth features	16	10.1.3	2.4 GHz Wi-Fi receiver performance – 2C	
4.2	Bluetooth Low Energy (LE) features	17		RF path	66
4.3	Bluetooth host interfaces	17	10.1.4	5 GHz Wi-Fi receiver performance - 5A/5B	
4.4	Digital audio interfaces	18		RF paths	68
4.4.1	I2S interface	18	10.1.5	6 GHz Wi-Fi receiver performance – 5A/5B	
4.4.1.1	I2S interface signals	18		RF paths	71
4.4.1.2	I2S interface protocol	18	10.1.6	2.4 GHz Wi-Fi transmitter performance –	
4.4.1.3	Clock frequency and audio data resolutions	20		2A/2B RF paths	73
4.4.2	PCM interface	21	10.1.7	2.4 GHz Wi-Fi transmitter performance –	
4.4.2.1	PCM interface signal description	21		2C RF path	74
4.4.2.2	PCM protocol	21	10.1.8	5 GHz Wi-Fi transmitter performance –	
4.4.2.3	PCM modes of operation	23		5A/5B RF paths	75
5	Coexistence	24	10.1.9	6 GHz Wi-Fi transmitter performance –	
5.1	Antenna configurations	24		5A/5B RF paths	76
5.1.1	Two-antenna configuration	24	10.2	Bluetooth radio specifications	77
5.1.2	Three-antenna configuration	24	10.2.1	Bluetooth/Bluetooth LE receiver	
5.2	Central hardware packet traffic arbiter	24		performance	77
5.3	Coexistence with external radios	25	10.2.2	Bluetooth/Bluetooth LE transmitter	
6	Pin information	29		performance	80
6.1	Signal diagram	29	10.3	Current consumption	82
6.2	Pin assignment – HVQFN package	30	11	Electrical specifications	91
6.3	Pin types	31	11.1	GPIO/LED interface specifications	91
6.4	Pin list – HVQFN package	32	11.1.1	VIO DC characteristics	91
6.5	Pin description	37	11.1.1.1	VIO 1.8 V operation	91
6.5.1	Pin states	37	11.1.1.2	VIO 3.3 V operation	91
6.5.2	General purpose I/O (GPIO)	38	11.1.2	LED mode	91
6.5.3	RF front-end control interface	42	11.2	RF front-end control interface specifications	92
6.5.4	Wi-Fi radio interface	43	11.2.1	VIO_RF DC characteristics	92
6.5.5	Bluetooth radio interface	43	11.2.1.1	VIO_RF 1.8 V operation	92
6.5.6	PCIe host interface	44	11.2.1.2	VIO_RF 3.3 V operation	92
6.5.7	UART host interface	45	11.3	PCIe host interface specifications	93
6.5.8	Digital audio interface	45	11.3.1	PCIe DC characteristics	93
6.5.9	PTA coexistence interface	46	11.3.2	Differential TX output specifications	93
6.5.10	WCI-2 coexistence interface	46	11.3.3	Differential RX input specifications	94
6.5.11	UART coexistence interface	47	11.4	UART interface specifications	95
6.5.12	Debug UART interface	47	11.5	Audio interface specifications	96
6.5.13	Wake-up/interrupt interface	48	11.5.1	I2S interface specifications	96

2x2 Dual-band (5-7 GHz) Concurrent Dual Wi-Fi 6/6E, 1x1 (2.4 GHz) Wi-Fi 6, and Bluetooth Combo Solution

11.5.2	PCM interface specifications	98
11.6	External radio coexistence interface specifications	100
11.6.1	WCI-2 coexistence interface specifications	100
11.6.1.1	WCI-2 interface	100
11.6.1.2	WCI-2 messages	101
11.6.1.3	WCI-2 signal waveform format	103
11.6.2	PTA interface coexistence specifications	104
11.7	Host configuration specifications	109
11.8	Reference clock specifications	110
11.8.1	External crystal specifications	110
11.8.2	External crystal oscillator specifications	111
11.9	Power-down specifications	112
11.9.1	PDn asserted low—Power supplies remain high	112
11.10	JTAG interface specifications	113
12	Package information	114
12.1	Package thermal conditions	114
12.1.1	HVQFN thermal conditions	114
12.2	Package mechanical drawings	115
12.2.1	HVQFN mechanical drawing	116
12.3	Package marking	118
12.3.1	HVQFN marking	118
13	Abbreviations	119
14	Appendix	123
14.1	Wi-Fi channel list	123
15	Revision history	125
	Legal information	126

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.
