


Desktop Power Charger with 20W PD, Qi Wireless, and Surge Protection

P205UCPDQ Series

USER MANUAL

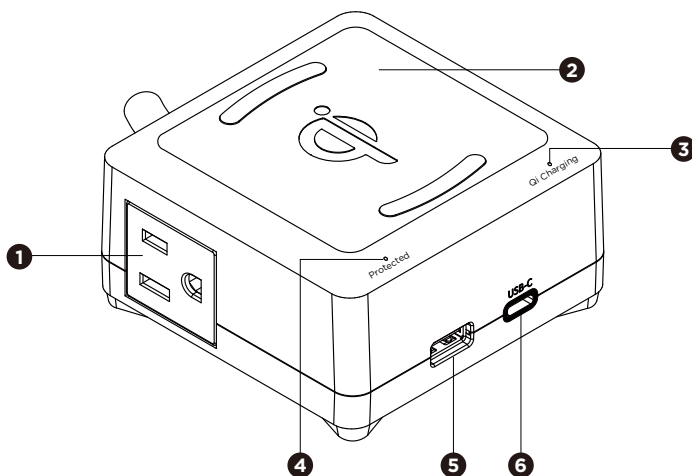

FEATURES

- 1. Standard Grounded Outlets (2)**
- 2. Wireless Charging Pad**
- 3. Qi Charging LED Indicator**
Illuminated when it is charging a device.
- 4. Protected LED Indicator**
Illuminated when the surge protection feature is working properly.
- 5. USB-A Charging Port (1)**
- 6. USB-C Charging Port (1)**

SPECIFICATIONS

Model Number:	P205UCPDQ Series
Outlets:	Standard Grounded Outlets (2), USB Charging Ports (2)
Electrical Rating:	125 V/13 A/1625 W
Surge Protection:	1,500 Joules
USB-A Charging Output:	5 V/2.4 A Max
USB-C Charging Output:	5 V/3 A Max, 9 V/2.22 A Max
USB Total Output:	20 W
Wireless Charging Output:	10 W
UL Clamping Voltage:	UL 1449 4th/600 V (L-N, L-G, N-G)
Maximum Peak Current:	45,000 A
3 AC Lines Protected:	L-N: 15,000 A; L-G: 15,000 A; N-G: 15,000 A
Response Time:	Less than 1 nanosecond
Power Cord Length:	5 ft
Plug Type:	Low Profile

⚠ WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

TROUBLESHOOTING

Protected indicator does not light

- The surge protector's AC lines are no longer protected from surge. The surge protector may have received a power surge or spike beyond its specified limits that has overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges and spikes. It should be replaced.

Qi charging LED is flashing

- Make sure that your device is Qi-enabled.
- Make sure that your device is on the center of the charging pad with the screen facing up.
- Make sure that there are no other objects on the charging pad.
- Remove the case of your device. It may be blocking the wireless signal.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

Hours of Operation: Monday - Friday: 7:00am - 6:00pm CST

© 2021 Cyber Power Systems (USA), Inc. All rights reserved.
All other trademarks are the property of their respective owners.



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
This device complies with Part 18 of the FCC Rules.
• The interference potential of the device or system.
• Maintenance of the system.
• Simple measures that can be taken by the user to correct interference.
• For RF lighting devices, provide an advisory statement, either on the product packaging or with other user documentation, similar to

the following:

This product may cause interference to radio equipment and should not be installed near maritime safety communications equipment or other critical navigation or communication equipment operating between 0.45-30 MHz.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur

in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.
• Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
• Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com