



Manuals.plus /

› nania /

› Nania IMAX Isofix Car Seat Group 1/2/3 (9-36kg) Instruction Manual

## nania IMAX Isofix

# Nania IMAX Isofix Car Seat Instruction Manual

Model: IMAX Isofix (962944) | Group 1/2/3 (9-36kg)

## 1. INTRODUCTION

---

Thank you for choosing the Nania IMAX Isofix Car Seat. This manual provides essential information for the correct installation, safe use, and maintenance of your car seat. Please read this manual carefully before using the product and keep it for future reference. Incorrect installation or use can compromise your child's safety.

## 2. SAFETY INFORMATION

---

- This car seat is designed for children weighing 9 to 36 kg (Group 1/2/3).
- It is approved according to European Safety Standard ECE R44/04.
- The car seat must **only** be installed in a forward-facing position.
- For children weighing 9 to 22 kg, use the integrated 5-point harness system.
- For children weighing 15 to 36 kg, secure the child using the vehicle's 3-point seat belt, with the car seat's 5-point harness removed.
- Always ensure the car seat is securely fastened to the vehicle's Isofix anchors and/or with the Top Tether, or the vehicle's 3-point seat belt, even when not occupied by a child.
- Never leave your child unattended in the car seat.
- Do not modify the car seat or use accessories not approved by the manufacturer.
- In case of an accident, even a minor one, the car seat may have suffered unseen damage and should be replaced.

## 3. PRODUCT OVERVIEW

---

The Nania IMAX Isofix car seat is designed for safety and comfort, featuring:

- Integrated Isofix connectors for secure installation.
- Adjustable headrest with 4 positions to grow with your child.
- Enhanced side impact protection.

- Articulated armrests for easy child placement and comfort.
- Removable and hand-washable cover for easy cleaning.



Figure 3.1: Front view of the Nania IMAX Isofix Car Seat, showing the 5-point harness and adjustable headrest.



Figure 3.2: Side view of the car seat, highlighting the side protection and Isofix indicators.

# IMAX isofix 1/2/3

ADAC Online 10/2018  
18 child car seats tested

**ADAC**

**NANIA**  
I-Max SP Isofix  
weight group  
9 to 36kg

**satisfactory** Test  
**(2.7)**



Accoudoirs relevables

----

Adjustable armrests



*Image descriptive - coloris non contractuel*  
*Descriptive image - non-contractual colours*

ISOFIX  
+  
TOP TETHER

Figure 3.3: Overview of key features including adjustable armrests, Isofix, Top Tether, and side protection.

## 4. SETUP AND INSTALLATION

### 4.1 Isofix Installation (Group 1/2/3)

The Nania IMAX Isofix car seat must be installed forward-facing using the vehicle's Isofix anchor points. For enhanced stability, especially for Group 1, the Top Tether should also be used.

1. Locate the Isofix anchor points in your vehicle. These are usually found between the seat back and cushion.
2. Extend the Isofix connectors from the car seat by pressing the release buttons (if applicable) and pulling them out.
3. Align the Isofix connectors with the vehicle's anchor points and push the car seat firmly until you hear a 'click' and the indicators turn green (if present).
4. Push the car seat firmly against the vehicle's seat back to ensure a tight fit.
5. For Group 1 (9-18kg), attach the Top Tether strap to the designated anchor point in your vehicle (usually behind the rear seat or in the boot) and tighten it until taut.

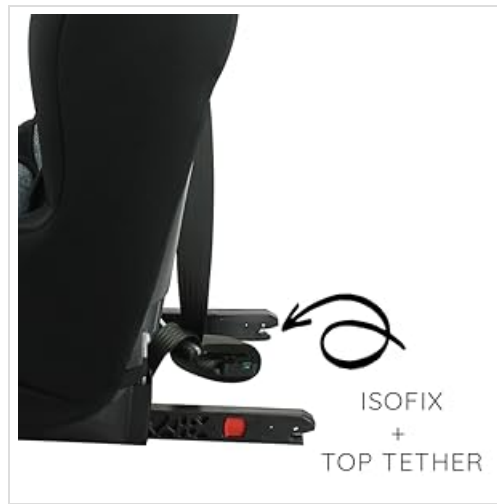


Figure 4.1: Detail of the Isofix connector mechanism.



Figure 4.2: Diagram illustrating the Isofix and Top Tether installation process.

## 4.2 Securing the Child (9-22 kg) - 5-Point Harness

For children weighing 9 to 22 kg, use the integrated 5-point harness system.

1. Place your child in the car seat.
2. Bring the shoulder straps over your child's shoulders and the waist straps between their legs.
3. Connect the two buckle tongues and insert them into the central buckle until you hear a 'click'.
4. Pull the harness adjustment strap to tighten the harness until it is snug against your child's body, ensuring no more than two fingers can fit between the strap and your child's collarbone.
5. Ensure the shoulder straps are at or just above your child's shoulders. Adjust the headrest height if necessary.



Figure 4.3: Close-up of the 5-point harness system.

### **4.3 Securing the Child (15-36 kg) - Vehicle's 3-Point Seat Belt**

For children weighing 15 to 36 kg, the integrated 5-point harness must be removed. The child is then secured directly by the vehicle's 3-point seat belt.

1. Remove the 5-point harness system from the car seat (refer to the specific instructions for harness removal, usually found in a label on the seat).
2. Place your child in the car seat.
3. Guide the vehicle's 3-point seat belt through the designated red guides on the car seat. The lap belt should pass under the armrests and through the red guide at the child's hips. The diagonal shoulder belt should pass through the red guide near the headrest.
4. Buckle the vehicle's seat belt.
5. Ensure the shoulder belt rests centrally on your child's shoulder and chest, not on the neck. The lap belt should be low across the hips, not on the stomach.

# IMAX isofix 1/2/3

ADAC Online 10/2018  
18 child car seats tested

**ADAC**

**NANIA**  
I-Max SP Isofix  
weight group  
9 to 36kg

**satisfactory**  
(2.7) **Test**



ISOFIX



TOP TETHER



SIDE PROTECTION



Face à la route  
avec harnais  
Forward facing position  
with harness



Face à la route sans harnais  
Forward facing position without harness



Figure 4.4: Illustration of child placement with 5-point harness (left) and vehicle's 3-point seat belt (right).

## 5. OPERATING AND ADJUSTMENTS

### 5.1 Headrest Adjustment

The headrest can be adjusted to 4 different height positions to ensure optimal protection and comfort as your child grows.

1. Locate the headrest adjustment lever, typically at the top or back of the headrest.
2. Squeeze the lever and simultaneously pull the headrest upwards or push it downwards to the desired position.
3. Release the lever to lock the headrest in place. Ensure it is securely locked before placing your child in the seat.

# IMAX isofix 1/2/3

ADAC Online 10/2018  
18 child car seats tested

**ADAC**

**NANIA**  
I-Max SP Isofix  
weight group  
9 to 36kg

**satisfactory**  
(2.7) **Test**



Tête réglable en  
4 positions

----

Adjustable headrest  
in 4 positions



ISOFIX



TOP TETHER



SIDE PROTECTION

*Image descriptive - coloris non contractuel  
Descriptive image - non-contractual colours*

Figure 5.1: The headrest can be adjusted to multiple positions to accommodate your child's height.



Figure 5.2: Close-up of the headrest adjustment mechanism.

## 5.2 Armrest Adjustment

The car seat features articulated armrests that can be moved to facilitate placing your child in and out of the seat.



Figure 5.3: Detail of the articulated armrest.

## 6. MAINTENANCE

---

### 6.1 Cleaning the Cover

The car seat cover is removable and can be hand-washed. Follow these steps:

1. Carefully remove the fabric cover from the car seat frame.
2. Hand wash the cover using mild soap and cold water. Do not bleach, tumble dry, or iron.
3. Allow the cover to air dry completely before reattaching it to the car seat.
4. Ensure the cover is correctly reattached and all harness straps pass through the correct slots.

### 6.2 Cleaning the Plastic Parts

The plastic parts of the car seat can be cleaned with a damp cloth and mild soap. Do not use abrasive cleaners or solvents.

## 7. TROUBLESHOOTING

---

If you encounter issues with your Nania IMAX Isofix Car Seat, please review the following common concerns:

- **Car seat feels loose after installation:** Ensure the Isofix connectors are fully engaged (green indicators visible) and pushed firmly against the vehicle seat. If using the Top Tether, ensure it is taut. For 3-point belt installation, pull the vehicle belt tight.
- **Harness is difficult to adjust or tighten:** Check that the harness straps are not twisted or caught under the seat cover. Ensure the harness adjustment strap moves freely.
- **Buckle not clicking:** Verify that both buckle tongues are correctly aligned before inserting them into the central buckle. Ensure no debris is obstructing the buckle mechanism.

If problems persist, please refer to the detailed installation diagrams or contact customer support.

## 8. SPECIFICATIONS

---

<b>Product Name</b>	Nania IMAX Isofix Car Seat
<b>Model Number</b>	962944
<b>Weight Group</b>	Group 1/2/3
<b>Minimum Recommended Weight</b>	9 kg
<b>Maximum Recommended Weight</b>	36 kg
<b>Maximum Recommended Child Height</b>	150 cm
<b>Product Dimensions (L x W x H)</b>	47 x 49 x 68 cm
<b>Product Weight</b>	6.84 kg
<b>Installation Type</b>	Isofix, 3-point vehicle seat belt
<b>Safety Standard</b>	ECE R44/04
<b>Manufacturer</b>	TEAM TEX



Figure 8.1: Diagram showing the dimensions of the Nania IMAX Isofix Car Seat.

## 9. WARRANTY AND SUPPORT

For warranty information or technical support, please refer to the documentation provided at the time of purchase or contact your retailer. Keep your proof of purchase for any warranty claims.