

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Trekassy](#) /

› [Trekassy 40-Inch Saucer Tree Swing User Manual](#)

Trekassy B082HNGMBP

Trekassy 40-Inch Saucer Tree Swing User Manual

Model: B082HNGMBP

1. INTRODUCTION

Thank you for choosing the Trekassy 40-Inch Saucer Tree Swing. This manual provides essential information for the safe assembly, operation, and maintenance of your swing. Designed for outdoor use, this swing features a durable 900D Oxford fabric, a heavy-duty galvanized steel frame, and adjustable ropes, supporting up to 700 lbs. Please read these instructions carefully before use.



Image 1.1: Trekassy 40-inch blue saucer tree swing.

2. SAFETY INFORMATION

- **Maximum Weight Capacity:** Do not exceed the maximum weight limit of 700 lbs (approximately 317 kg).
- **Age Recommendation:** Suitable for children aged 36 months and older. Adult supervision is required at all times.
- **Installation:** Ensure the swing is securely attached to a sturdy tree branch or swing set beam that can safely support the maximum weight capacity.
- **Clearance:** Maintain adequate clear space around the swing to prevent collisions with objects or other individuals.
- **Inspection:** Regularly inspect all components, including ropes, straps, carabiners, and the frame, for signs of wear, damage, or loosening. Discontinue use if any damage is found and replace parts as necessary.
- **Usage:** Avoid excessive or violent swinging that could compromise stability or safety.

3. PACKAGE CONTENTS

Verify that all components are present before beginning assembly:

- 1 x Saucer Swing (900D Oxford fabric with galvanized steel frame)
- Adjustable Ropes (pre-attached to swing)
- 2 x Tree Hanging Straps
- 2 x Heavy-duty Galvanized Locking Carabiners



Image 3.1: Detail of 900D Oxford fabric and construction.

4. SETUP INSTRUCTIONS

Assembly is designed to be quick and requires no additional tools.

1. **Choose a Secure Location:** Select a strong, horizontal tree branch or a sturdy swing set beam. Ensure the branch/beam is free from obstructions and can support the swing's maximum weight capacity.
2. **Attach Tree Hanging Straps:** Wrap each tree hanging strap around the chosen branch or beam. Thread one end of the strap through the loop on the other end, pulling it tight to secure.
3. **Connect Carabiners:** Attach a heavy-duty galvanized locking carabiner to the loop at the end of each tree hanging strap.
4. **Connect Swing Ropes:** Attach the adjustable ropes of the saucer swing to the carabiners. Ensure the carabiners are fully closed and locked.
5. **Adjust Swing Height:** Use the adjustment buckles on the ropes to set the desired height of the swing. Ensure both sides are adjusted equally so the swing is level.
6. **Final Safety Check:** Before first use, thoroughly check all connections, ropes, and straps to confirm they are secure and properly installed. Gently test the swing's stability.

9000 OXFORD FABRIC

Higher Density, Superior Durability

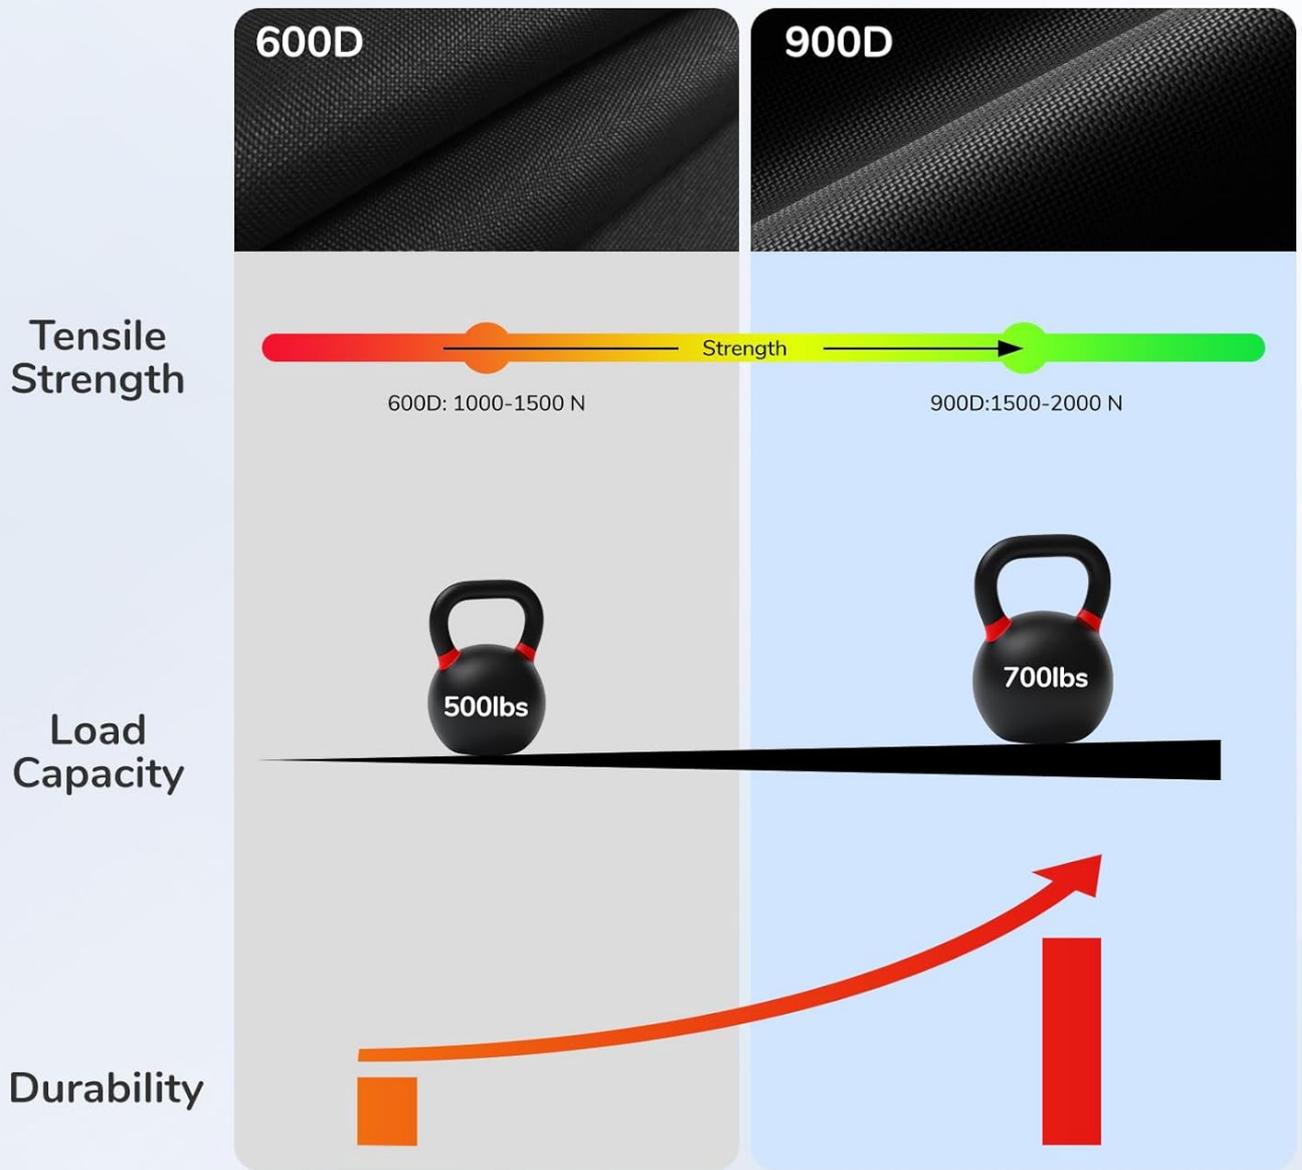


Image 4.1: Saucer swing installed with tree straps.

5. OPERATING INSTRUCTIONS

The Trekassy Saucer Tree Swing is designed for versatile play and relaxation.

- **Seating:** The generous 40-inch diameter allows for comfortable seating for multiple children or an adult and child. Users can sit upright, lie down, or recline.
- **Swinging Motion:** The swing can be used for traditional back-and-forth swinging. Depending on the installation method (e.g., single point attachment), it can also provide 360-degree spinning motion.
- **Capacity:** The swing is engineered to support up to 700 lbs, accommodating several users simultaneously within this limit.

WITHSTAND ALL WEATHER CONDITIONS

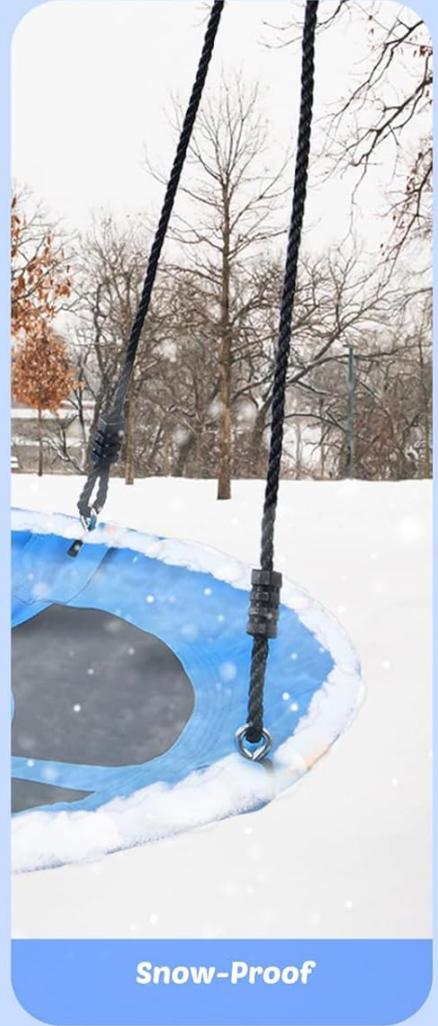


Image 5.1: Multiple children enjoying the swing.



Image 5.2: Adult and child using the swing.

6. MAINTENANCE

Proper maintenance ensures the longevity and safety of your Trekassy Saucer Tree Swing.

- **Cleaning:** The 900D Oxford fabric is waterproof and wear-resistant. Clean the swing surface with a damp cloth and mild soap as needed. Rinse thoroughly and allow to air dry.
- **Weather Protection:** While designed to withstand UV, water, and snow, prolonged exposure to extreme weather conditions can affect durability. Consider covering the swing or bringing it indoors during severe weather or extended periods of non-use.
- **Component Inspection:** Regularly check the ropes, tree straps, carabiners, and steel frame for any signs of fraying, cracks, rust, or other damage. Pay close attention to areas of high stress.
- **Fastener Check:** Ensure all bolts and connections are tight. Re-tighten if any looseness is detected.
- **Storage:** If storing the swing for the off-season, clean it thoroughly, ensure it is completely dry, and store it in a cool, dry place away from direct sunlight.



Image 6.1: 900D Oxford fabric durability comparison.



Image 6.2: All-weather durability features.

7. TROUBLESHOOTING

If you encounter any issues with your swing, refer to the following common solutions:

- **Swing is not level:** Adjust the rope lengths using the buckles on each rope until the swing seat is balanced and level.
- **Squeaking noises during use:** Check all metal-to-metal contact points, especially at the carabiners and rope connections. A small amount of silicone-based lubricant may resolve the issue.
- **Visible wear or damage to components:** Immediately discontinue use. Inspect ropes, straps, and frame for fraying, tears, or structural damage. Contact Trekassy customer support for replacement parts or further assistance.

8. SPECIFICATIONS

Feature	Detail
Brand	Trekassy
Model Number	B082HNGMBP

Feature	Detail
Color	Blue
Product Dimensions	40"D x 40"W x 71"H
Frame Material	Alloy Steel
Fabric Material	900D Oxford
Maximum Load Capacity	700 lbs
Assembly Required	Yes
Manufacturer Minimum Age	36 months
Item Weight	3.82 Pounds

9. WARRANTY AND SUPPORT

For any questions, concerns, or to inquire about warranty information and support, please contact Trekassy customer service. Refer to your product packaging or the official Trekassy website for the most current contact details.