

Saved from manuals.plus.

Open the live page for links to other documents and user manuals.

[Manuals.plus](#) /

› [inova](#) /

› Schulte Interior Sliding Glass Door 90x203 cm, Safety Glass, Frosted Decor Glass Door - Round Handle + Double Soft-Close Damper

inova BHTV490G72-BHZIP691V05

Schulte Interior Sliding Glass Door User Manual

Model: BHTV490G72-BHZIP691V05

PRODUCT OVERVIEW

The inova Schulte Interior Sliding Glass Door offers a modern and space-saving solution for dividing rooms while allowing natural light to flow through. Crafted with 8mm safety glass and a robust aluminum rail system, this door combines elegant design with German engineering quality.



Figure 1: The Schulte Interior Sliding Glass Door in a typical home setting, showcasing its light-transmitting frosted glass design.

Key features include a quiet surface-mounted rail system with a discreet floor guide to prevent swinging, and an optional soft-close mechanism for gentle and silent operation. The maintenance-free ball bearing ensures long-lasting smooth performance.

SETUP AND INSTALLATION

This sliding glass door system is designed for straightforward installation, with a complete mounting kit included. No specialized tools are required for assembly.

Package Contents



Figure 2: All components included in the installation kit, such as the rail, hangers, floor guide, and mounting hardware.

Before beginning installation, ensure all components listed in the manual are present and undamaged. The kit typically includes the glass panel, aluminum rail, hangers, floor guide, handle, and all necessary screws and anchors.

Dimensions and Measurements

Accurate measurements are crucial for proper installation. The door panel measures 90x203 cm. Refer to the following diagrams and table for detailed dimensions and recommendations for passage width and height.



Figure 3: Detailed dimensions of the door panel (900 mm width, 2035 mm height) and the rail length (1810 mm).



Unsere Maßempfehlungen

Flügelbreite und Flügelhöhe	Geeignet für Durchgangsbreite bis:	Geeignet für Durchgangshöhe bis:	Laufschienenlänge
755x2035 mm	715 mm	2000 mm	1810 mm
775x2035 mm	735 mm	2000 mm	1810 mm
880x2035 mm	840 mm	2000 mm	1810 mm
900x2035 mm	860 mm	2000 mm	1810 mm
1025x2200 mm	985 mm	2165 mm	2100 mm

Abstand der Tür zur Wand: 13 mm / 29 mm (ohne / mit Wändistanzprofil)

Es kann zu Abweichungen im Sondermaß kommen.
Kontaktieren Sie uns dazu gerne telefonisch oder per Email.

Nos recommandations de dimensions

Largeur et hauteur vantail	Compatible pour largeur passage jusqu'à	Compatible pour hauteur passage jusqu'à	Longueur rail
755x2035 mm	715 mm	2000 mm	1810 mm
775x2035 mm	735 mm	2000 mm	1810 mm
880x2035 mm	840 mm	2000 mm	1810 mm
900x2035 mm	860 mm	2000 mm	1810 mm
1025x2200 mm	985 mm	2165 mm	2100 mm

Distance entre porte et mur : 13mm / 29mm (sans / avec profilé d'écartement mural)

Les dimensions spéciales peuvent varier. N'hésitez pas à nous contacter
par téléphone ou par e-mail.

Figure 4: Table providing recommended dimensions for door panel size, compatible passage width, compatible passage height, and rail length.

Recommended Dimensions (Example for 90x203 cm)

Door Panel Size	Compatible Passage Width (up to)	Compatible Passage Height (up to)	Rail Length
900x2035 mm	860 mm	2000 mm	1810 mm

The distance from the wall to the door is approximately 13 mm (without wall spacer profile).

Mounting the Rail and Hangers

Secure the aluminum rail firmly to the wall above the door opening, ensuring it is level. The door panel hangs from this rail via robust hangers.



Figure 5: Detail of the door panel suspended from the top rail by the hanger mechanism.

Installing the Floor Guide

A discreet floor guide is installed at the bottom to prevent the door from swinging. This guide ensures smooth and stable movement of the door panel.

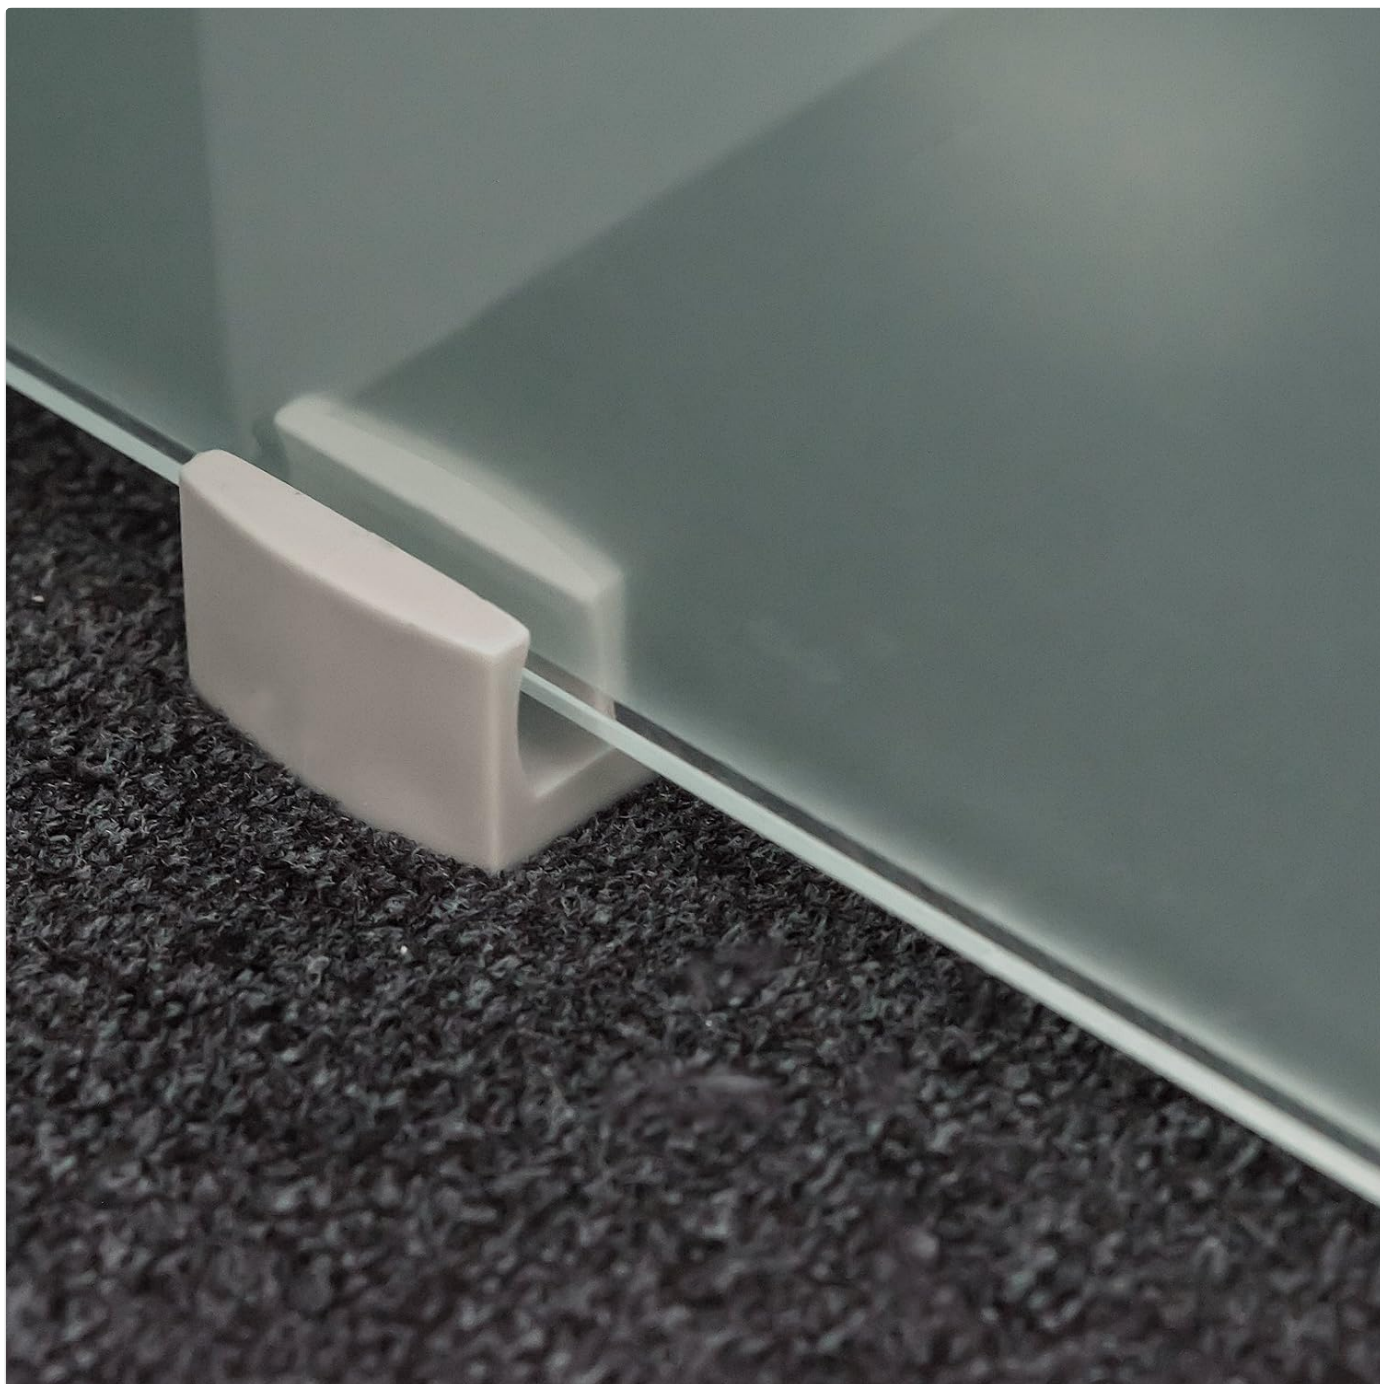


Figure 6: The floor guide, which keeps the bottom of the door stable during opening and closing.

Handle Installation

The round handle is integrated into the glass panel. Ensure it is securely fitted according to the instructions provided in the full manual.



Figure 7: Dimensions of the round recessed handle (69 mm diameter, 8.5 mm depth).

OPERATING INSTRUCTIONS

The Schulte Interior Sliding Glass Door operates by smoothly gliding along its top-mounted rail. To open or close the door, gently push or pull the integrated handle in the desired direction.

Soft-Close Function (Optional)

If your model includes the optional soft-close mechanism, the door will automatically slow down and gently close as it approaches the end of its travel. This feature prevents slamming and ensures quiet operation.



Figure 8: The soft-close feature ensures a gentle and controlled closing of the door.



Figure 9: Internal view of the soft-close damper integrated within the sliding rail.

MAINTENANCE

The Schulte Interior Sliding Glass Door is designed for minimal maintenance. The ball bearing system is maintenance-free, ensuring smooth operation without the need for lubrication.

Cleaning

- **Glass Panel:** Clean the glass surface with a standard glass cleaner and a soft, lint-free cloth. Avoid abrasive cleaners or harsh chemicals that could scratch the glass or damage the frosted decor.
- **Aluminum Rail and Hardware:** Wipe down the aluminum rail and other metal components with a damp cloth and mild detergent if necessary. Dry thoroughly to prevent water spots.
- **Floor Guide:** Periodically check the floor guide for any accumulated dust or debris and clean as needed to ensure unobstructed movement of the door.

Regular light cleaning will help maintain the aesthetic appeal and functionality of your sliding door.

TROUBLESHOOTING

If you encounter any issues with your Schulte Interior Sliding Glass Door, please refer to the following common troubleshooting tips:

- **Door does not slide smoothly:**
 - Check the top rail for any obstructions or debris.
 - Ensure the floor guide is clean and free of obstructions.
 - Verify that the door hangers are properly seated in the rail.
- **Door is difficult to open/close:**
 - Inspect the rail and rollers for any damage or misalignment.
 - Confirm that the door is level and plumb.
- **Soft-close function not engaging (if applicable):**
 - Ensure the soft-close mechanism is correctly installed and aligned within the rail.
 - Check for any obstructions preventing the door from reaching the soft-close trigger point.

For issues not resolved by these steps, please contact customer support.

SPECIFICATIONS

Attribute	Detail
Brand	inova
Model Number	BHTV490G72-BHZIP691V05
ASIN	B082SX4NMN
Size	90x203 cm
Material	Safety Glass (8mm), Aluminum
Color	Aluminum
Style	Contemporary
Item Weight	40 kg (40000 Grams)
Assembly Required	Yes
Country of Origin	Germany
UPC	04250820207851

WARRANTY AND SUPPORT

This inova product is manufactured in Germany to high-quality standards. While specific warranty details are not provided in this manual, the product is typically covered by standard consumer guarantees and a 30-day return policy as per purchase terms.

For technical assistance, replacement parts, or any other inquiries, please contact the manufacturer or your point of

purchase. When contacting support, please have your model number (BHTV490G72-BHZIP691V05) and ASIN (B082SX4NMN) ready.

You can visit the [inova Brand Store](#) for more information and product variations.

© 2023 inova. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question