


Sunco

Lighting made better.

User Manual

6" High Lumen Selectable Slim Downlight

SKU: DL_SL6-HO-2750K

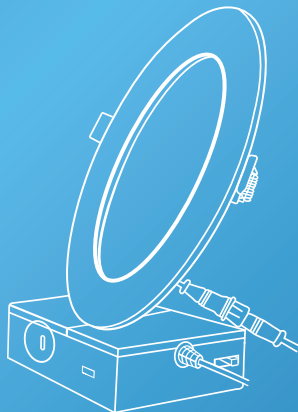


support@sunco.com

(844) 334-9938



What's in the Box?

Slim Downlight



*Let there be light!
(literally)*



A

x1

Light Fixture



B

x1

Junction Box



C

x1

Installation Template




D


x3

Wire Nuts

Get Your Gear



Cable Connector



Hole Saw



Ladder



Wire Strippers

Before You Start

Safety Information

To reduce the risk of fire, electric shock, or physical injury:


- Turn off circuit breaker before installing this fixture.
- Professional installation required. Safety gear recommended.
- Abide by regional and local laws or regulations.
- Proper grounding is required to ensure safety.
- Do not alter, or remove wiring during installation.
- Do not make or alter any open holes in wiring enclosure or electrical components during installation.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Keep fixture away from corrosive substances.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Suitable for damp locations at temperatures ranging from -4°F to 113°F. Not for use where directly exposed to water.
- Use safety precautions & abide by regional & local laws or regulations.
- This product is not compatible with 3rd party sensors.
- This product is not compatible with photo controls.
- This product is not compatible with occupancy sensors.
- This product is not compatible with timing devices.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
1) This device may not cause harmful interference.
2) This device must accept any interference that may cause undesired operation. Please review all instructions carefully prior to installation.

⚠ WARNING:


Cancer & Reproductive Harm-
www.P65Warnings.ca.gov

Quickstart Guide




Step 1

Use template to cut hole.




Step 2

Connect supply & junction wires.



Step 3


Attach fixture to junction box.



Step 4


Insert fixture into ceiling.

Installation Guide




STEP 1

- Turn off circuit breaker before installation.
- Cut out 6.33" housing size on Installation Template, then tape onto ceiling in desired location.
- Cut ceiling hole using Installation Template as a guide.



STEP 2


- Open junction box and remove appropriate knockout.



STEP 3

- Thread cable connector through knockout, secure wires with screws, attach cable connector nut on opposite side, & connect supply & junction wires with wire nuts.
-Black to Black (Live) ; White to White (Neutral)
- Tuck connected wires inside junction box & close cover.

B




STEP 4

Slide the CCT Selection Switch to choose from five color temperatures. Insert junction box through ceiling hole.

a. New Construction Applications: Secure to studs, joists, or similar fixed structural units.


b. Remodel Applications: Do not require to secure to studs, joists, or similar fixed structural units.



STEP 5

a. Attach fixture to junction box using connector as shown on image (1).

b. Tighten connector by hand (2).



STEP 6

a. Push up spring clips and insert fixture into ceiling.

b. Turn on circuit breaker and test light.

Product Details

Recommended Dimmers

Brand	Model
LUTRON	CTCL-153PDH-WH
LUTRON	DVCL-153P-WH
LUTRON	DVELV-300P-WH
LUTRON	DVRP-253P-WH
LUTRON	IPI06-1LZ
LEVITON	6672-1LW
KASA SMART	HS220
KASA SMART	HS220P3

Scan for the full compatible dimmer list!



Specifications

Voltage	120 V	Average Lifetime	50,000 Hours
Wattage	14 W	Lumens	1500 lm
Wattage Equivalency	120 W	Moisture Rating	Damp Rated
Beam Angle	120°	CRI	80+
Weight	0.6 lbs	Usage	Indoor
Housing Material	Plastic+Metal J-box	IC Rated	Yes
Dimmable	YES	Warranty	7 Years

Common Troubleshooting

We've got you covered! Our troubleshooting section is here to shed some light and provide you with easy-to-follow solutions for any problem.

If you still need some assistance, feel free to contact us. Our team of lighting experts are happy to help brighten your day.

Installation

Light isn't turning on.

Double check if fixture is properly connected and circuit breaker hasn't been tripped.

Light unexpectedly fails.

Reach out to customer support.

Dimming

Light not dimming to lowest setting.

Ensure minimum dimmer load requirement is met.

Light not dimming smoothly.

Verify dimmer compatibility with fixture.

Light not compatible with dimmer switch.

Check light-dimmer compatibility.

Flickering

Light is flickering when turning on.

Check that fixture wiring connections are secure.

Light flickering with other lights on the same circuit.

Check that the lights are not overloading the circuit.

Light flickering when turned on.

Verify fixture compatibility and that it is grounded.

Light flickering when dimmed.

Verify dimmer switch compatibility.

Buzzing

Fixture buzzing with power outages.

Verify light is connected to surge protector securely.

Fixture buzzing with electronic devices.

Look for nearby interferences that can cause buzzing. Such as televisions, radios, computers, etc.

Fixture buzzing when dimmed.

Verify dimmer switch compatibility.

Sunco

Lighting made better.

support@sunco.com
(844) 334-9938

REV1.0