




Mark Mann Signature Kit


Features

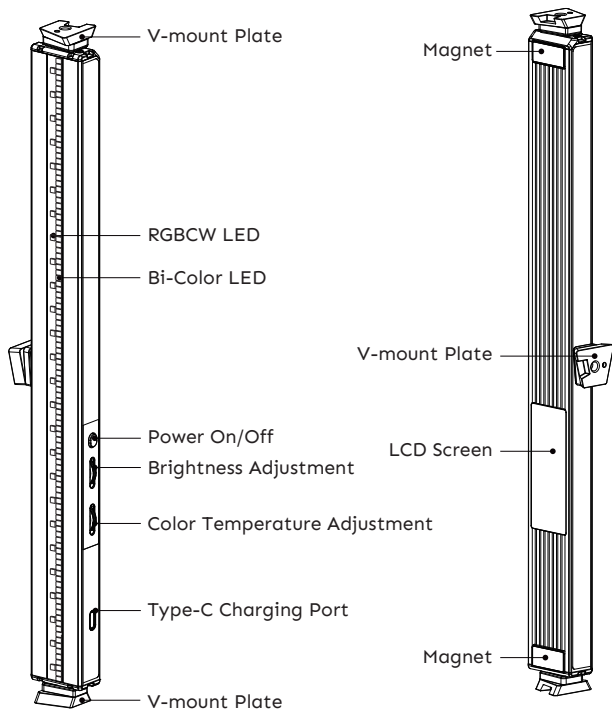


Single Light Use

Barndoors & Diffusion Panel Installation


1. Attach two magnetic barndoors to the slots at both ends of the Blade, making sure you hear a click.



2. Attach magnetic diffusion panel to the slots at both ends of the Blade, making sure you hear a click.



Basic Settings



Power On/Off

Power On: Press the power button, then rotate the LM dial to turn on the light.
Power Off: Press the power button to turn off the light.

White Light Mode

Brightness Adjustment

1. Rotate the LM dial to adjust brightness.
2. Adjustable range: 0 - 100%.
3. Press the LM dial for shortcuts.

Color Temperature Adjustment

1. Rotate the CCT dial to adjust color temperature.
2. Adjustable range: 1700K-10000K.
3. Press the CCT dial for shortcuts from 2700K to 6500K.

RGBCW Mode

Mode Switching

1. Long press both the CCT dial for 1.5 seconds to switch to RGBCW mode.
Long press the CCT dial again for 1.5 seconds to switch back to White Light Mode.
2. In RGBCW mode, press the CCT dial to switch between saturation and color gamut adjustment interfaces.

Brightness Adjustment

1. Rotate the LM dial to adjust brightness.
2. Adjustable range: 0-100%.
3. Press the LM dial for shortcuts.

Saturation Adjustment

1. Rotate the CCT dial to adjust saturation.
2. Adjustable range: 0-100.

Color Gamut Adjustment

1. Rotate the CCT dial to adjust the color gamut.
2. Adjustable range: 0-360.



Menu Selection

1. Long press the power button for 1.5 seconds to enter the menu selection interface.
2. Rotate the CCT dial to select the menu.
3. Press the CCT dial to enter the sub-menu.
4. Long press the power button for 1.5 seconds to exit the menu interface.


Using Four Lights Together

Setup


1. Connect the 4 V-mount magic arms to the V-mounts on both ends of the 4 lights to form a square.
2. Attach the 2 V-mount handles to the outer V-mounts of the 2 lights on the vertical sides of the square.




3. Mount the assembled lights on the 2 tripods (not included), ensuring a secure connection.




4. Fix the 1-to-5 adapter on the tripod, ensuring it's secure.




5. Attach the V-mount clamp to the tripod and adjust to the desired height.

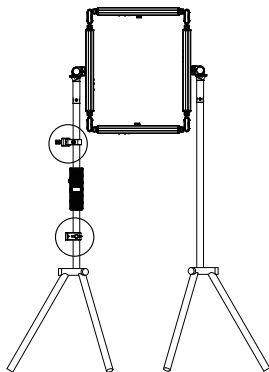


6. Install the remote control panel's charging base and the 100W power supply on the V-mount clamp.

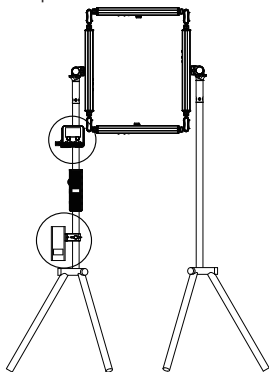


7. Connect one end of the D-Tap cable to the 100W power supply and the other end to the 1-to-5 adapter.

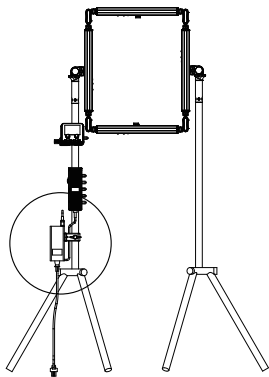

8. Select the appropriate length of Type-C charging cables. Connect one end of each cable to the 1-to-5 adapter and the other end to the charging ports of the 4 lights and the remote control panel's charging base.

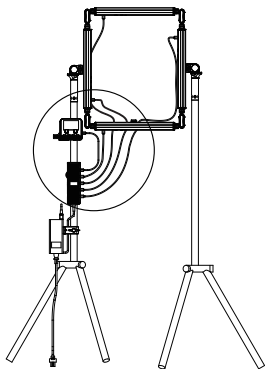


9. Attach one end of the large magic arm to the magnetic plate and the other end to the V-mount on the side of any light. You can then magnetically attach your phone or other devices to the magnetic plate.

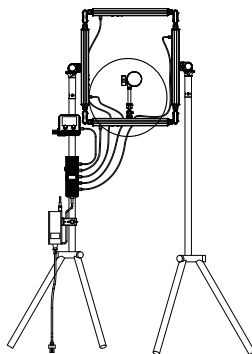


Remote Control Panel Operation

Power On: Short press the right-most button on the remote control panel.



Power Off: Long press the LM knob on the remote control panel for 1.5 seconds.



Pairing

1. Power on each light individually. (The same operating as "Single Light Use").
2. Long press the LM dial on each light for 1.5 seconds until the Bluetooth symbol flashes on the display.




3. Long press any button on the remote control panel for 1.5 seconds until the Bluetooth symbol flashes. When the background on the display highlights in blue, pairing is successful.



4. After successful pairing, the same number will appear on both the remote control panel and the light displays.



5. You can start adjusting the light settings via the remote control panel 5 seconds after successful pairing.



6. Short press the button to deselect a light. Press it again to re-select the paired light.



White Light Mode

Adjusting Brightness

1. Rotate the LM knob on the remote control panel to adjust brightness.
2. Adjustable range: 0-100%.
3. Press the LM knob for shortcuts.

Adjusting Color Temperature

1. Rotate the CCT knob on the remote control panel to adjust color temperature.
2. Adjustable range: 1700K-10000K.
3. Press the CCT knob for shortcuts from 2700K to 6500K.

RGBCW Mode

Mode Switching

1. Long press the CCT knob on the remote control panel for 1.5 seconds to switch to RGBCW mode. Long press again for 1.5 seconds to switch back to white light mode.
2. In RGBCW mode, press the CCT knob to switch between saturation and color gamut adjustment interfaces.

Adjusting Brightness

1. Rotate the LM knob on the remote control panel to adjust brightness.
2. Adjustable range: 0-100%.
3. Press the LM knob for shortcuts.

Adjusting Saturation

1. Rotate the CCT knob on the remote control panel to adjust saturation.
2. Adjustable range: 0-100.

Adjusting Color Gamut


1. Rotate the CCT knob on the remote control panel to adjust the color gamut.
2. Adjustable range: 0-360.

App Download

You can download the Harlowe app in the (Apple) App Store and Google Play store by scanning the following QR code.

🔍 Harlowe

🔍 www.harlowe.com



WARNINGS

- Please thoroughly read the manual prior to operating the product and operate in strict accordance with the manual.
- Don't disassemble the product by yourself. If the product requires repair, contact our maintenance personnel.
- Product failures caused by unauthorized disassembly are not covered by warranty, and will be chargeable.
- The product is designed to be actively cooled by fans. Don't block the fan ducts of the product during operation.
- Don't touch the heat generating parts of the product during operation to avoid scalding injury.
- The power must be switched off during set-up and break down of the product.
- Don't submerge the product in water or other liquid/s to avoid safety risk and product failure.
- Allow the product to properly cool after each use before storage.
- Only use the originally supplied accessories to avoid product failure/s.
- Only use the supplied charging adapter and power cable to avoid damage to the product.

Product Specifications

Light Only

Power	10W (White LED), 10W (RGBCW)
Luminous (10000K)	900lm
Luminous (1700K)	800lm
Input	AC 100-240V, 50~60Hz
	DC 5V/9V
Battery	7.4V 1800mAh, 13.32Wh
CRI	96
TLCI	96
CCT	1700K-10000K
Dimming	0-100%
Wireless Method	Bluetooth
Wireless Operating Range	20m / 65.6ft
Operating Temperature	-10~40°C / 14~104°F
RGBCW	36000 Colors Color Gamut: 0-360 Saturation: 0-100 Intensity: 0-100
Dimension (Light)	360x35x18mm / 14.17x1.38x0.71in
Net Weight (Light)	358g / 0.79lbs

Warranty Terms

We provide a two-year warranty period for the original buyer of the product. For the detailed warranty scope, please log in our website.

Important notes:

- Please retain your original purchase invoice and warranty card and ensure that the complete supplier information is on the invoice, including the purchase date and product serial number, which will be needed when making a claim against the warranty.

The warranty does not cover:

- Damage caused by improper use, false wiring, incompatible, poor quality or mis-adjusted external devices.
- Damage to the appearance of the product from mishandling or abuse.
- Exposure to rain or water.
- Damage caused by transportation. Please contact your dealer to issue a claim.

The warranty will be invalid if:

- The product serial number has been torn off or can't be identified.
- The product has been repaired or modified by unauthorized persons.

Warranty Card

Product No.	
Product name	
Purchase date	
User name	
User telephone	
User address	
Dealer stamp	

AEC LIGHTING SOLUTIONS CO., LTD.

INSPECTION: PASS

Add: 2548 Bao'an Highway, Jiading District, Shanghai 201801, China



For more information, please visit
www.harlowe.com or scan:



HARLOWE.COM

AEC LIGHTING SOLUTIONS CO., LTD
2548 Bao'an Highway, Jiading District, Shanghai 201801, China