


6 Way Master Switch MINI Controller


1.Wiring Instructions

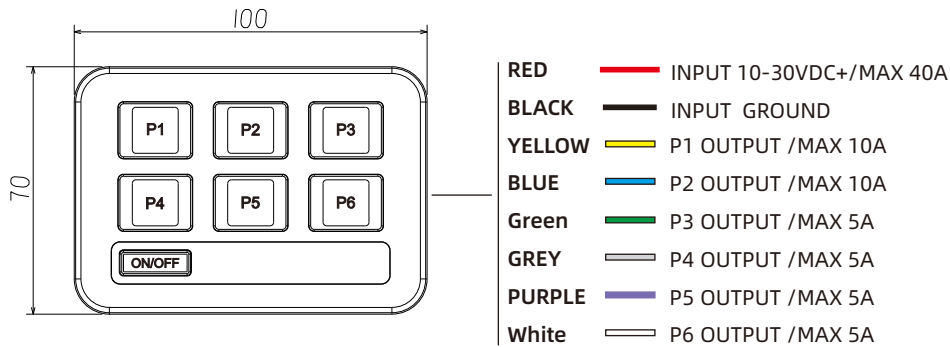

2.ENTER Programming Mode

2.1:Latching/Momentary Setting

- To enter programming mode ensure that the controller is switched OFF.
- PRESS and HOLD the ON/OFF master switch button, whilst depressed, push the corresponding Switch that you would like to program from ON/ OFF latching to Momentary activation which will be confirmed by an audible tone.
- Repeat this procedure to program each of the 4 available switches.

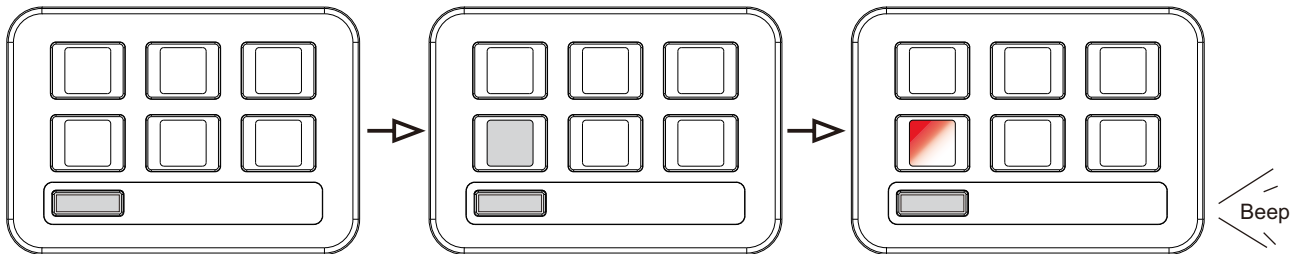


2.2:Master/Slave Setting(Group mode)

- Power on the controller, press and hold the button to be set as the master, keep it until a BEEP sound. Then press the button to be set as the slave.
- Cancellation: Power on, press and hold the master button, keep it until a BEEP sound, then press the slave button to cancel
- Remarks: After set successfully of Master/Slave button, the slave button can still be controlled independently.

NOTE:


If the button is flashing the button is set as slave, if the button is constantly on the button is set as slave.

If a button is programmed as momentary the button can ' t be used as slave, the button will be constantly on and if you press the master button (Momentary programmed) the button will not switch to flashing.

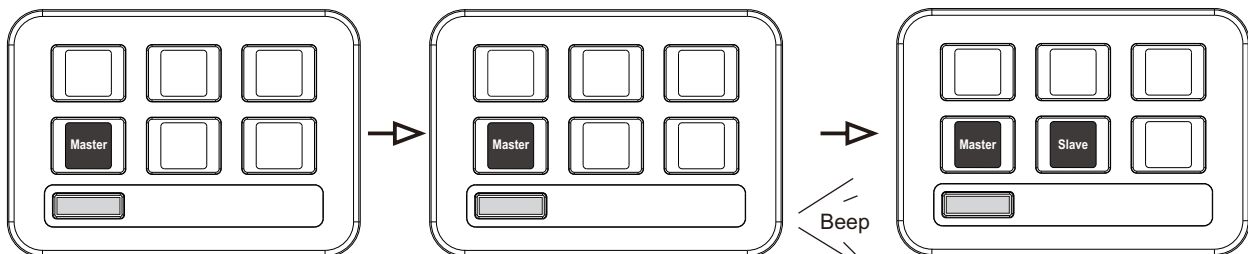

3.Mounting

3.1: 3M Sticker mount

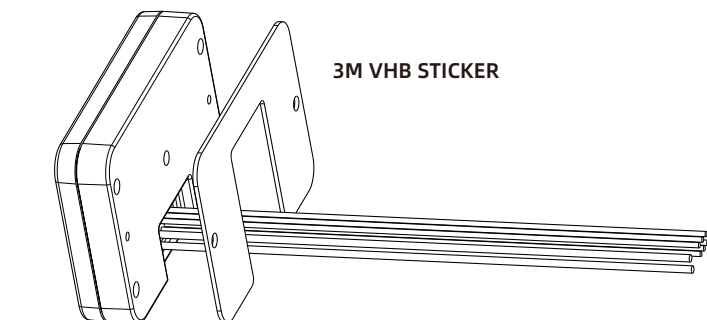

3.2: Bracket mount

