

NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

[Return to the Webpage](#)



Features

- Solid-State
- High speed
- Ultra-high reliability
- Low insertion loss
- Compact

Applications

- Optical protection
- Configurable operation
- Instrumentation

The NanoSpeed™ Series 1x2 solid-state fiber optic switch connects optical channels by redirecting an incoming optical signal into a selected output optical fiber. This is achieved using patent non-mechanical configurations with solid-state all-crystal designs, eliminating the need for mechanical movement and organic materials. The broadband series of NS fiber optic switch is designed to meet the most operation requirements of wave length band in addition of ultra-high reliability, fast response time, and continuous switching operation. This series of switches are **bidirectional** intrinsically. The switch is intrinsically bidirectional and selectable for polarization-independent or polarization-maintain by the fiber type.

The NS Series switch is controlled by 5V TTL signals with a specially designed electronic driver having performance optimized for various repetition rate.

The rise/fall time is intrinsically related to the crystal properties, and the repetition rate is associated with the driver. There are poor frequency response sections due to the device resonances. The NS devices are shipped mounted on a tuned driver.

The NS series switches respond to a control signal with any arbitrary timing with frequency from DC up to MHz. The switch is usually mounted on a tuned driver prior to shipping. The electrical power consumption is related to the repetition rate at which the switch is operated.

The dual-stage configuration increases the extinction ratio or cross-talk value.

Specifications

Parameter		Min	Typical	Max	Unit
Insertion Loss ^[1]	1700~2300nm		0.8	1.8	dB
	1260~1620nm		0.6	1.1	
	960~1100nm		0.8	1.3	
Cross Talk On/Off Ratio ^[2]		20	25	35	dB
Durability		10 ¹⁴			cycles
PDL (SMF Switch only)			0.15	0.3	dB
PMD (SMF Switch only)			5	6	ps
ER (PMF Switch only)		18	25		dB
IL Temperature Dependency			0.25	0.5	dB
Wavelength Range ^[3]	Standard		50		nm
	Broadband		70		
Return Loss		45	50	60	dB
Response Time (Rise, Fall)		50		100	ns
Fiber Type		SMF-28, Panda PM, or equivalent			
Driver Repeat Rate	100kHz driver	DC	100		kHz
	500kHz driver	DC	500		kHz
Optic Power Handling ^[4]	Normal power switches		0.3	0.4	W
	High power switches			20	W
Operating Temperature		-5		70	°C
Storage Temperature		-40		85	°C

Notes:

[1]. Measured without connectors.

[2]. Cross talk is measured at 1kHz and 1550±25nm, which may be degraded at the high repeat rate.

[3]. @1550nm. Within this range, the spec will be met. The device operates well beyond this range with performance degradation.

[4]. Defined at 1310nm/1550nm. For the shorter wavelength, the handling power may be reduced, please contact us for more information.

Note: The specifications provided are for general applications with a cost-effective approach. If you need to narrow or expand the tolerance, coverage, limit, or qualifications, please [click this link](#):

Warning: This is an OEM module designed for system integration. Do not touch the PCB by hand. The electrical static can kill the chips even without a power plug-in. Unpleasant electrical shock may also be felt. For laboratory use, please buy a Turnkey system.

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind Agiltron only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with the use of a product or its application.

Rev 08/02/25

© Photonwares Corporation

P +1 781-935-1200

E sales@photonwares.com

W www.agiltron.com

Information contained herein is deemed to be reliable and accurate as of the issue date. Photonwares reserves the right to change the design or specifications at any time without notice. Agiltron is a registered trademark of Photonwares Corporation in the U.S. and other countries.


NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Mechanical Dimensions (Unit: mm)

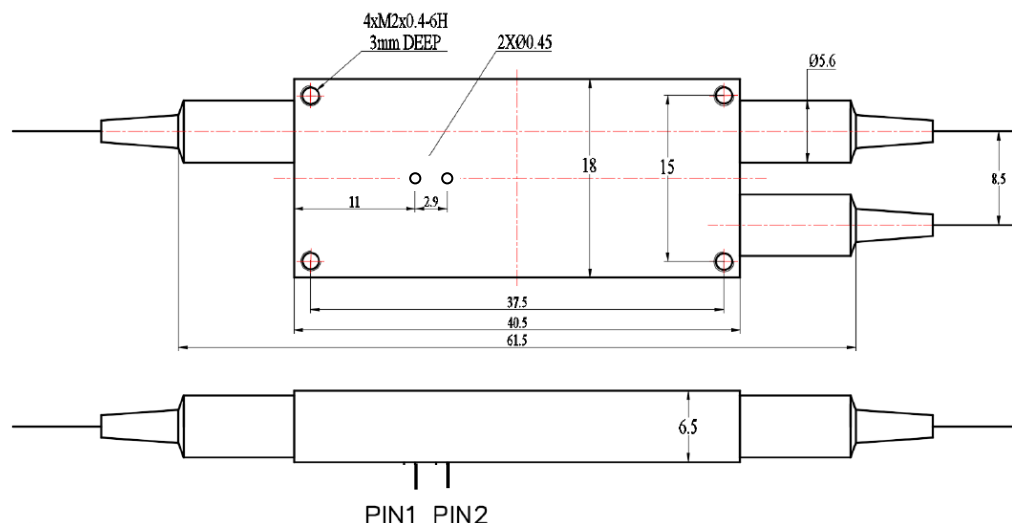

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.

Optical Path Driving Table

Optical Path	TTL Signal
Port 1 → Port 2	L (< 0.8V)
Port 1 → Port 3	H (> 3.5V)

Driving Board Selection

Maximum Repetition Rate	Part Number (P/N)
100 kHz	SWDR-11a261111
500 kHz	SWDR-11a291111

* Note: For customers that prefer to design their own driving circuit, they are responsible for the optical performance. For more technical information, please contact us.

NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Ordering Information

	1 2	☐	1 2	☐	☐	☐	☐	☐	☐
Prefix	Type	Wavelength	Configuration & Package	Fiber Type	Fiber Cover	Fiber Length	Connector ^[4]	Optical Power	Benchtop
NSBW - ^[1] NHBW - ^[2]	1x2 = 12	1260~1620nm = 1 960~1200nm = 2 1750nm = A 2000nm = B Special = 0	SS & NP ^[3] = 12 Special = 00	SMF-28 = 1 HI1060 = 2 PM 1550 = 5 PM980 = 9 Special = 0	Bare fiber = 1 900um loose tube = 3 Special = 0	0.25m = 1 0.5m = 2 1.0 m = 3 Special = 0	None = 1 FC/PC = 2 FC/APC = 3 SC/PC = 4 SC/APC = 5 ST/PC = 6 LC/PC = 7 Duplex LC/PC = 8 LC/APC = 9 E2000 APC = A LC/UPC = U Special = 0	Regular = 1 1W = A 2W = B 5W = C 10W = D 20W = E	None = 1 Benchtop = B



[1]: **NSBW** -- Normal power switch

[2]: **NHBW** -- High power broadband switch. The red-colored version will have a long lead time as the special package may be needed. NHBW (>5W) need the special HP connector, please contact the sale.

[3]: Single stage & Normal package

[4]: There isn't any connector in the high power switches normally. Please contact us for high power connectors.

Benchtop Box Mechanical Dimension

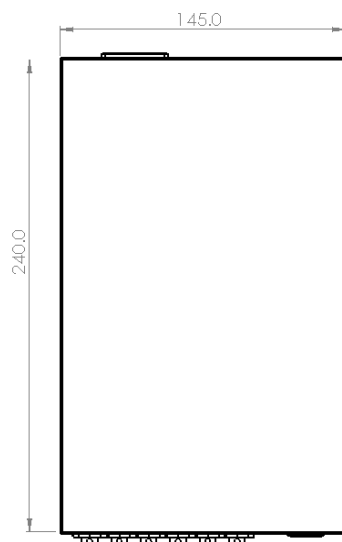

*Product dimensions may change without notice. This is sometimes required for non-standard specifications.


NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)





DATASHEET

Optical Power Handling vs Wavelength For Single-Mode Fibers

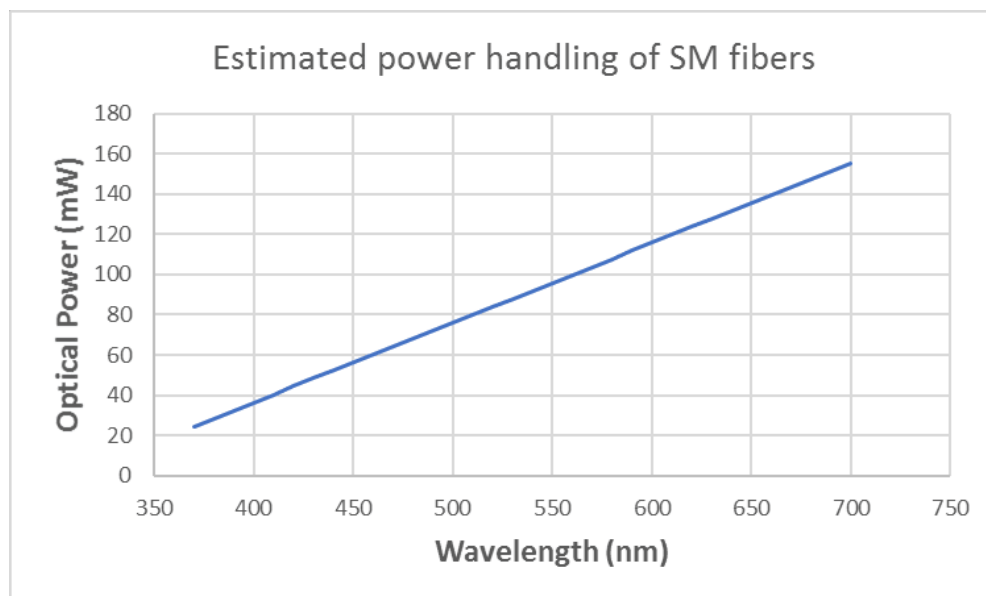

Typical Speed and Repetition Measurement

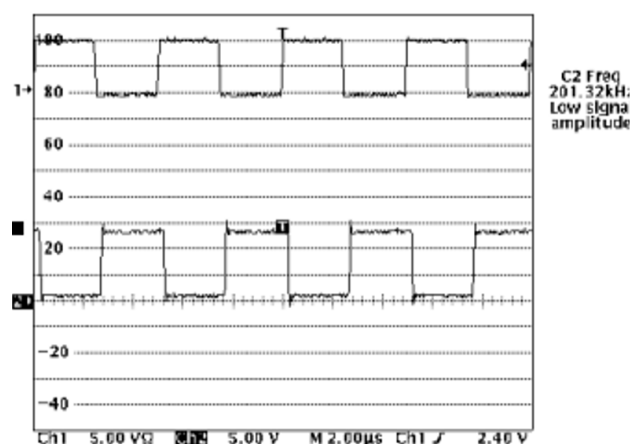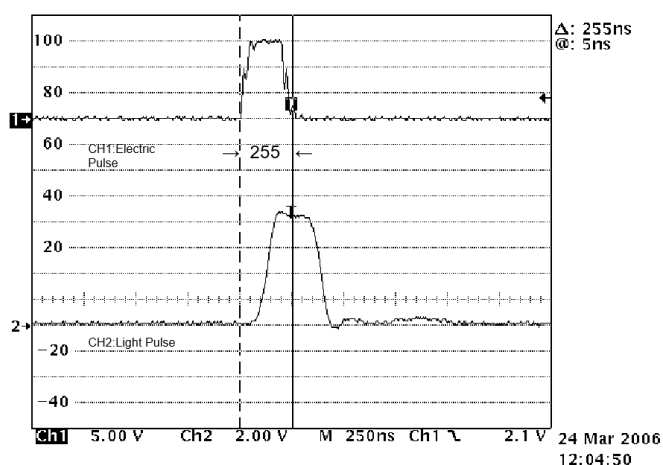


NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Typical Extinction Ratio vs Wavelength

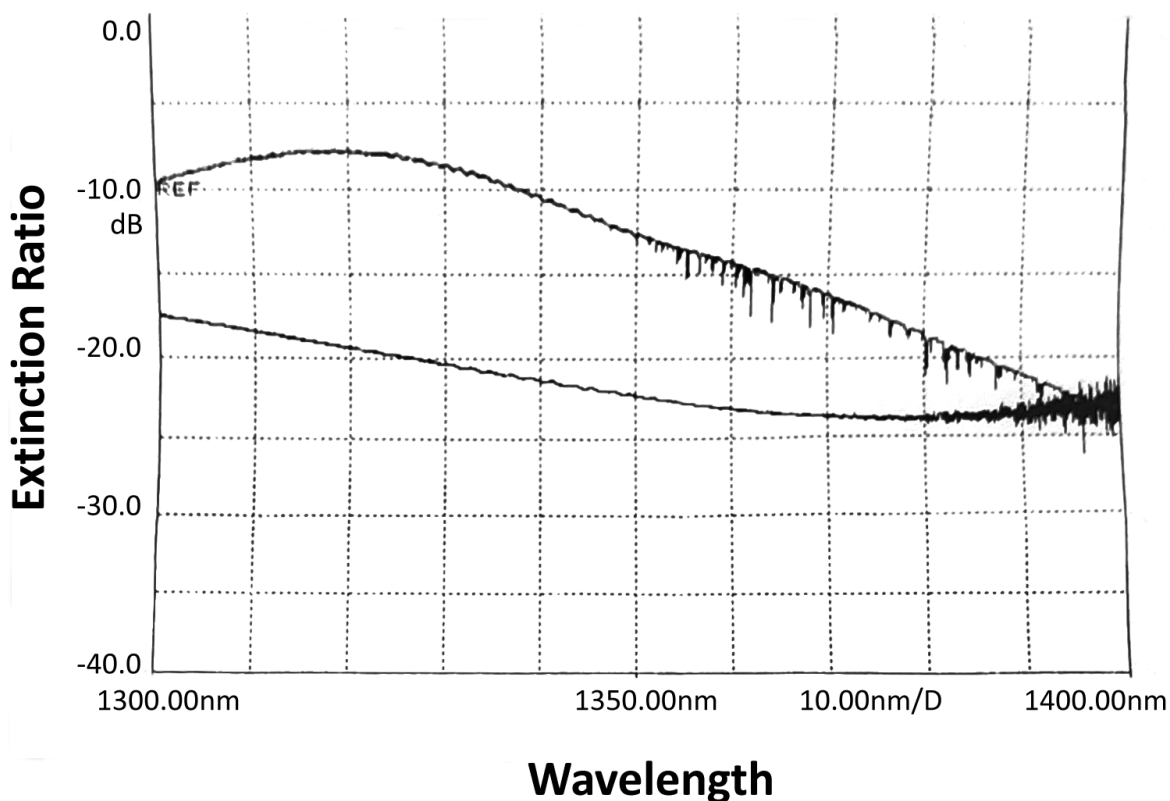

NanoSpeed™ Broadband 1x2 Series Fiber Optical Switch

(SMF, PMF, High Power, Bidirectional)



DATASHEET

Q & A

Q: Does NS device drift over time and temperature?

A: NS devices are based on electro-optical crystal materials that can be influenced to a certain range by the environmental variations. The insertion loss of the device is only affected by the thermal expansion induced miss-alignment. For extended temperature operation, we offer special packaging to -40 -100 °C. The extinction or cross-talk value is affected by many EO material characters, including temperature-dependent birefringence, V_p , temperature gradient, optical power, at resonance points (electronic). However, the devices are designed to meet the minimum extinction/cross-talk stated on the spec sheets. It is important to avoid a temperature gradient along the device length.

Q: What is the actual applying voltage on the device?

A: 100 to 400V depending on the version.

Q: How does the device work?

A: NS devices are not based on Mach-Zander Interference, rather birefringence crystal's nature beam displacement, in which the crystal creates two different paths for beams with different polarization orientations.

Q: What is the limitation for faster operation?

A: NS devices have been tested to have an optical response of about 300 ps. However, practical implementation limits the response speeds. It is possible to achieve a much faster response when operated at partial extinction value. We also offer resonance devices over 20MHz with low electrical power consumption.

Operation Manual

1. Connect a control signal to the SMA connector on the PCB.
2. Attach the accompanied power supply (typically a wall-pluggable unit).
3. The device should then function properly.

Note: Do not alter device factory settings.

Application Notes

Fiber Core Alignment

Note that the minimum attenuation for these devices depends on excellent core-to-core alignment when the connectors are mated. This is crucial for shorter wavelengths with smaller fiber core diameters that can increase the loss of many decibels above the specification if they are not perfectly aligned. Different vendors' connectors may not mate well with each other, especially for angled APC.

Fiber Cleanliness

Fibers with smaller core diameters ($<5 \mu\text{m}$) must be kept extremely clean, contamination at fiber-fiber interfaces, combined with the high optical power density, can lead to significant optical damage. This type of damage usually requires re-polishing or replacement of the connector.

Maximum Optical Input Power

Due to their small fiber core diameters for short wavelength and high photon energies, the damage thresholds for device is substantially reduced than the common 1550nm fiber. To avoid damage to the exposed fiber end faces and internal components, the optical input power should never exceed 20 mW for wavelengths shorter 650nm. We produce a special version to increase the how handling by expanding the core side at the fiber ends.