


**SHIMBOL**

# Monitor M5

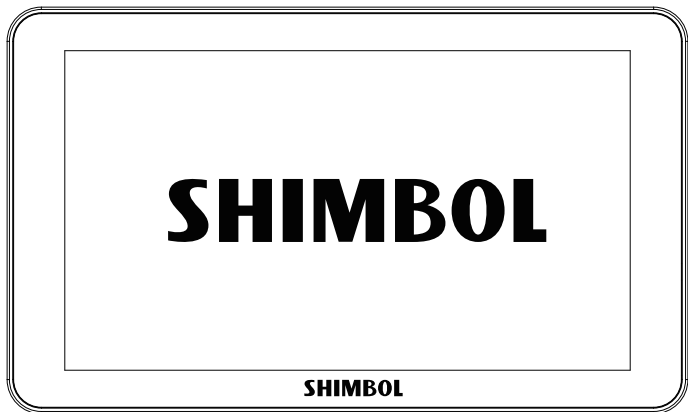

**Instruction Manual**

Shenzhen ZO Video Technology Co., Ltd.

# Packing list

Carry Case




Monitor




Tempered Screen Protector




User Manual




HDMI Cable\*1



Micro HDMI Cable



Hot Shoe Mount\*1



Dusting Cloth



Monitor\*1

HDMI Cable\*1

Carry Case\*1

Tempered Screen Protector\*1


Micro HDMI Cable\*1

User Manual\*1

Hot Shoe Mount\*1

Dusting Cloth\*1

# Buttons and Ports

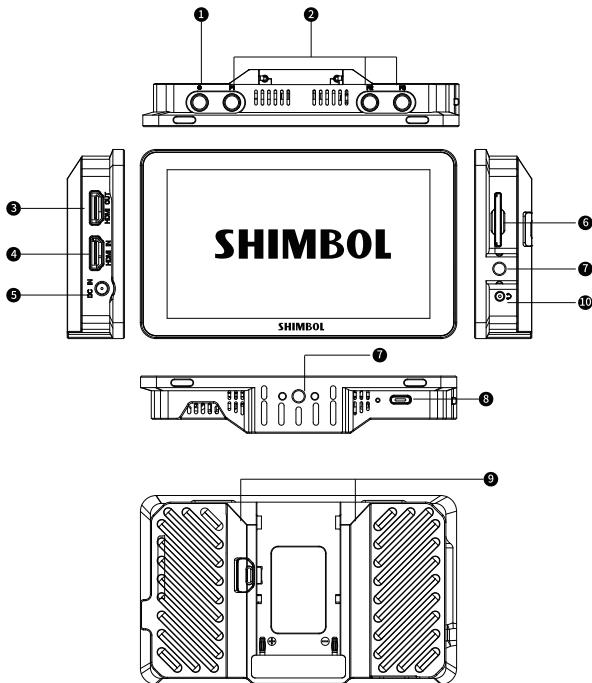

- 1 Power ON/OFF Button
- 2 Custom Function Buttons
- 3 HDMI Output
- 4 HDMI Input
- 5 DC Input
- 6 SD Card Slot
- 7 1/4"-20 Thread Hole
- 8 USB Upgrade Port
- 9 NP-F Battery Plate
- 10 3.5mm Headphone Jack

# Catalog

|                                  |   |
|----------------------------------|---|
| I . Monitors Assist Icons-----   | 3 |
| II . User Interface-----         | 4 |
| III. Operation Guide -----       | 5 |
| 1. Boot Method -----             | 5 |
| 2. 3D-LUT Input Method -----     | 5 |
| 3. RGB Gain and Offset-----      | 6 |
| 4. Format SD Card-----           | 6 |
| IV. Notes-----                   | 7 |
| 1. Exceptions in Connection----- | 7 |
| 2. SD card Description -----     | 7 |
| V . Technical Parameters-----    | 8 |

# User Interface



① Resolution

② Zoom

③ SD Card

④ 3D-LUT

⑤ Power Indication

⑥ Waveform Menu

⑦ Marker Menu

⑧ Focus Menu

⑨ Exposure Menu


⑩ Color Menu

⑪ System Settings


⑫ Lock Screen

⑬ Audio Meter


# User Interface

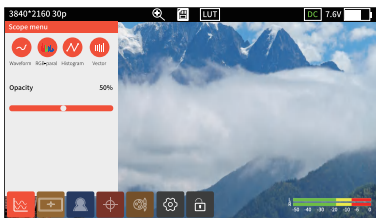


Scope Menu

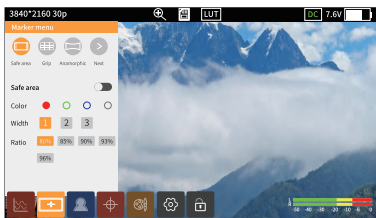


Marker Menu

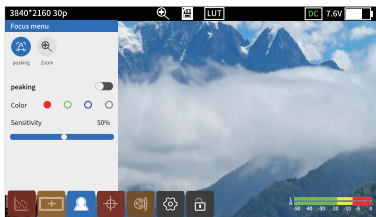


Focus Menu

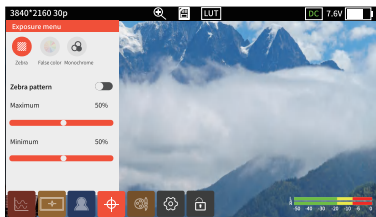

Exposure Menu

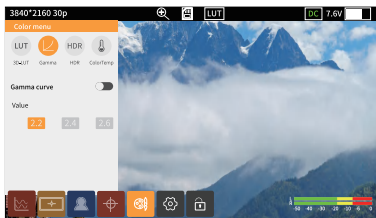

Color Menu

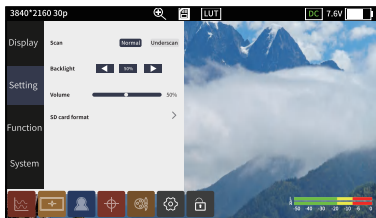


Setting Menu

# Function Instruction

1.Short press the power on/off button to turn on the monitor, long press 3 seconds to turn it off.

## 2.3D-LUT import method

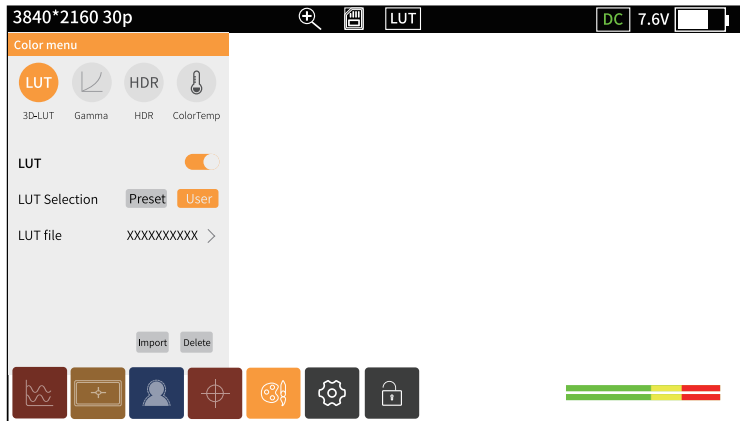


- ① Place the LUT file in the LUT folder on the SD card and insert the SD card into the monitor
- ② Click the Color Menu-3D-LUT, turn on , and then selecting Custom, click the Import button and wait for the system to retrieve the LUT file in the SD card that needs to be loaded
- ③ Click on the LUT file that needs to be loaded, then click Import and wait for the file to be imported into the system
- ④ Click the LUT file, enter the file selection, select the desired LUT, and click to confirm that the LUT is loaded successfully


Note: LUT file name only support English, do not allow any other languages , special characters, spaces, otherwise it will fail to be imported !

# Function Instruction

## 3.RGB Gain and Offset Control Functions

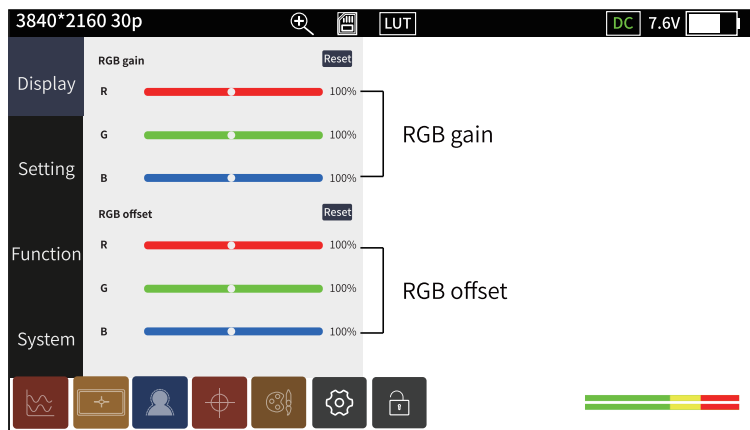

## 4.Formatting SD Cards

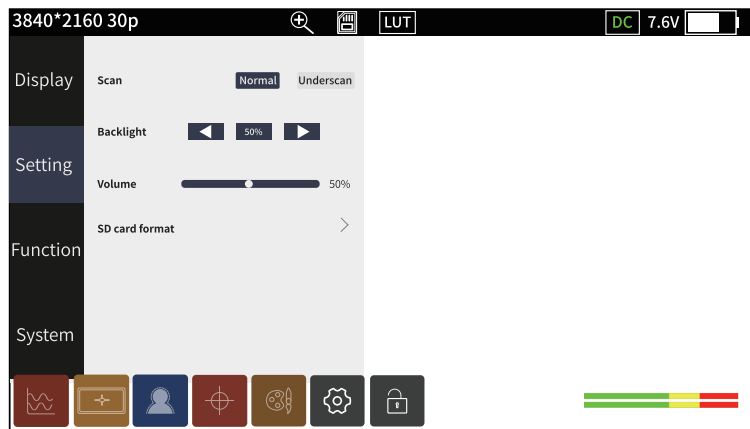



# Notes

---

## 1. Correlation of Function States

Zoom, Anamorphic, Waveform, these three functions can only be opened one at a time. Such as when the Anamorphic function is open, has opened the Zoom or Waveform will be forced to close

## 2. SD Card Identification and Use Problems

2.1 The SD card of this product does not support hot-swapping, if the SD card is inserted and removed during use, causing abnormalities such as the card cannot be recognized and the screen interface cannot be operated, please restart the monitor


# Technical Parameters

|                                |                                                                                                                                                        |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model No.                      | M5                                                                                                                                                     |
| Screen Size                    | 5.5TP                                                                                                                                                  |
| Screen Resolution              | 1920*1080                                                                                                                                              |
| Aspect Ratio                   | 16:9                                                                                                                                                   |
| Brightness                     | 1200cd/m <sup>2</sup>                                                                                                                                  |
| Contrast Ratio                 | 1000:1                                                                                                                                                 |
| Viewing Angle                  | 160°                                                                                                                                                   |
| Interface                      | DC In , HDMI Input, HDMI Output,<br>3.5mm Headphone out, SD card slot, Type-C                                                                          |
| LUT Format                     | cube file (17*17*17和33*33*33) ①                                                                                                                        |
| Output/Input<br>Signal Formats | 4096*2160P25/24/23.98<br>3840*2160P30/23.98/25/24/23.98<br>1920*1080p60/59.94/50/30/29.97/25/24/23.98<br>1920*1080i60/59.94/50<br>1280*720p60/59.94/50 |
| Audio Frequency                | 48kHz                                                                                                                                                  |
| Power Supply Method            | NP-F / DC IN                                                                                                                                           |
| Input Voltage                  | DC 6.5V-16.8V                                                                                                                                          |
| Power Consumption              | < 6.5w                                                                                                                                                 |
| Firmware Updates               | SD card updates                                                                                                                                        |
| Weight                         | 278.5g                                                                                                                                                 |
| Unit Size                      | 146.6*87.6*26.5mm                                                                                                                                      |

**Please note:** ① The LUT file to be imported

It is under "Lut" folder of root directory in SD card, and the LUT files should not exceed 50.

# SHIMBOL

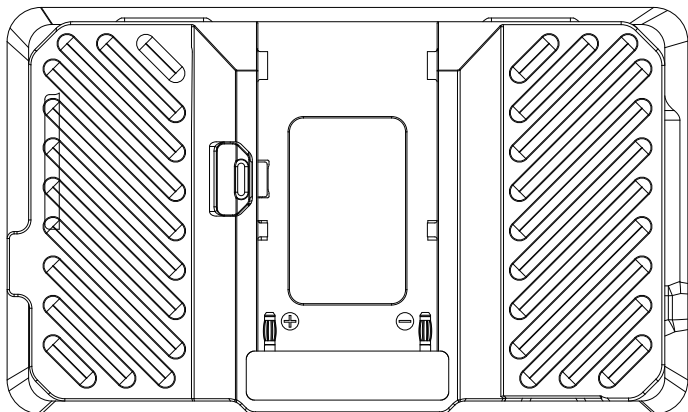

UK CA FC CE   

Tel+86 0755-21004986

[www.zeroone-video.com](http://www.zeroone-video.com)

Address: 2C, 2nd Floor, Building 6, Longbi Industrial Park  
No.27 Dafa Road, Bantian Street, Longgang District, Shenzhen  
Shenzhen ZO Video Technology Co., Ltd.

## 封底