

Congratulations on your recent purchase of the Enbrighten Bistro Lights. Enbrighten Bistro Lights are designed to provide lighting for life with no bulbs to replace ever again! Purchase additional lights to form one continuous string up to 750 feet!

IMPORTANT: Before installation, please read all the warning statements included on the reverse side of these instructions.



In order to ensure proper installation, please follow each step below:

Step 1 - INITIAL SETUP

- 1 - Carefully unpack Bistro Lights from box. Remove the wire ties (see warning on reverse side).
- 2 - When installing Bistro Lights outside, a Ground Fault Circuit Interrupter (GFCI) receptacle must be used. Before installing, plug the Bistro Lights into the GFCI receptacle to ensure all lights work properly. IMPORTANT: Unplug the Bistro Lights prior to mounting.

Step 2 - INSTALLING BISTRO LIGHTS

- 1 - IMPORTANT: Only mount Bistro Lights to solid support structures such as joists, beams, studs or other solid mounting surfaces.
- 2 - Each Bistro Light is designed with a universal keyhole for mounting with lights hanging downward. Hardware options include screws, nails, zip ties, hooks and more (not included).
- 3 - Guide wires in compliance with local electrical and building codes must also be used to support the Bistro Lights.
- 4 - Once appropriate GFCI outlet location, mounting surface and hardware are determined, mount your Bistro Lights.
- 5 - Once you have mounted the Bistro Lights, connect the male plug into the GFCI receptacle and place the female receptacle cover firmly over the unused outlet.

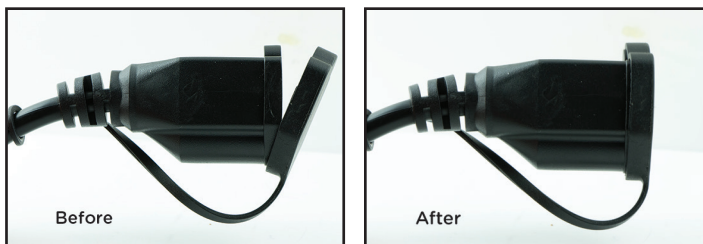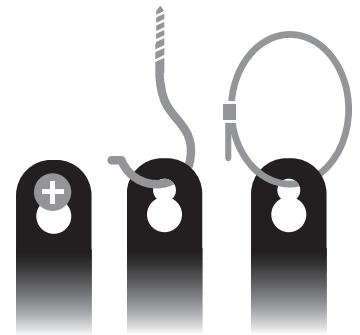

Available in multiple lengths at www.byjasco.com

Step 3 - INSTALLING MULTIPLE BISTRO LIGHT SETS

Extend the length of your lights by connecting more than one strand together to form one continuous string up to 750 feet! Simply follow the above installation steps, making sure each connection between strands is secure. Once installation is complete, place the female receptacle cover firmly over the unused outlet.

Length, feet	Bulbs	Model Number
12	6	38353
24	12	38356
48	24	38357

See reverse side for electrical rating

Step 4 - REMOVING BISTRO LIGHTS

- 1 - Always unplug Bistro Lights from their receptacle prior to removal.
- 2 - Carefully remove each light individually from the mounting hardware.
NOTE: For your safety, never pull or jerk lights from mounting hardware.
- 3 - Store lights in a dry location.

SAVE THESE INSTRUCTIONS

enbrighten® Bistro

READ IT OR WATCH IT



Read instructions or watch easy-to-follow video. Scan QR code or visit <http://bit.ly/2V4GzKV>

Simplify your Bistro Lights experience by automating your on and off light times.

We recommend the following models available at your local retailer or at www.byjasco.com:

GE myTouchSmart Outdoor
Timer (Plug-in)
Model #26898



The GE myTouchSmart Plug-in Timer is the easiest to set timer on the market. Simply select your time and go.

GE myTouchSmart
Timer (In-Wall)
Model #41431



The GE myTouchSmart In-Wall Timer provides easy-set controls if your receptacle is controlled by a switch.

myTouchSmart
Outdoor/Indoor Wifi Smart Plug
Model #39845



Schedule and control outdoor lighting from any mobile or voice-controlled device.

GE Bluetooth
Smart Switch (In-Wall)
Model #13869



The GE Bluetooth In-Wall version provides the same Bluetooth control if your receptacle is controlled by a switch.

Important — please read:

Refer to the manual or visit www.byjasco.com for limitations and restrictions on warranties and the product registration information.

WARNING: When using outdoors Use portable luminaires. Basic safety precautions should always be followed to reduce the risk of fire, electrical shock and personal injury, including the following:

- Use only three-wire outdoor extension cords that have three-prong grounding plugs and grounding receptacles that accept the appliance's plug.
- Ground Fault Circuit Interrupter (GFCI) protection is to be provided on the circuit(s) or outlet(s) to be used for the wet location portable luminaire. Receptacles are available having built-in GFCI protection and are able to be used for this measure of safety.
- Use only with an extension cord for outdoor use, such as an extension cord of cord type SEW, SEOW, SEOWW, SOW, SOOW, STW, STOW, STOWW, SJEW, SJEOW, SJEOWW, SJW, SJOW, SJOOW, SJTW, SJTOW, or SJTOOW.

WARNING: Keep these bags away from babies and children. Do not use in cribs, beds, carriages or playpens. The thin film may cling to nose and mouth and prevent breathing.

NOTE: Ensure the Bistro Light's receptacle cover is firmly installed and well seated when not being used to connect additional strings.

Warranty Information: This Jasco product is warranted for lifetime replacement warranty on the LED light source only.

Electrical Ratings
Input: 120 V, 60 Hz

Model No.	Input watt, Max.	Location Use
GE014-OPP-5.4W	5.4W	Wet
GE014-OPP-10.8W	10.8W	
GE014-OPP-21.6W	21.6W	

MADE IN CHINA / HECHO EN CHINA
DISTRIBUTED BY JASCO PRODUCTS
COMPANY LLC, 10 E. MEMORIAL RD.,
OKLAHOMA CITY, OK 73114.
Patents pending
Questions? Contact our U.S.-based
Consumer Care at 1-800-654-8483
between 7AM—8PM CST.



WARNING

RISK OF ELECTRIC SHOCK

- RECEPTACLE OUTLETS USED FOR POWERING BISTRO LIGHTS SHALL COMPLY WITH ALL NATIONAL AND LOCAL ELECTRICAL CODES. CONSULT LOCAL ELECTRICIAN IF UNSURE OF COMPLIANCE REQUIREMENTS.
- FOR USE ONLY ON GFCI PROTECTED CIRCUITS.
- DO NOT SUBMERSE.
- DO NOT USE AROUND AQUARIUMS.
- BISTRO LIGHTS ARE A WET LOCATION PRODUCT AND HAVE NO SERVICEABLE PARTS.
- DO NOT USE WITH EXTENSION CORD NEAR WATER OR WHERE WATER MAY ACCUMULATE.
- KEEP LAMPS AT LEAST 16 FEET FROM POOLS AND SPAS.
- KEEP PLUGS AND RECEPTACLES DRY.
- AVOID DAMAGE TO THE CORDS AND LAMP ASSEMBLIES DURING INSTALLATION. PERIODICALLY INSPECT THE BISTRO LIGHTS FOR PHYSICAL DAMAGE OR OTHER DAMAGE CAUSED BY OUTDOOR EXPOSURE TO THE ELEMENTS.
- REPLACE ANY DAMAGED BISTRO LIGHT STRINGS.
- DO NOT INSTALL IN LOCATIONS WHERE BISTRO LIGHTS CAN BE STEPPED ON.
- ENSURE BISTRO LIGHTS ARE UN-PLUGGED FROM POWER DURING INSTALLATION.
- BISTRO LIGHTS SHOULD BE INSTALLED OUT OF THE REACH OF CHILDREN OR NOT ALLOWING CHILDREN TO PLAY WITH THEM.
- UL RECOMMENDS TESTING GFCI CIRCUITS AND RECEPTACLES EVERY MONTH TO ENSURE PROPER OPERATION.
- DO NOT OPERATE WITHOUT BULB SECURELY SCREWED IN.

RISK OF FIRE

- BISTRO LIGHTS ARE DESIGNED TO BE MOUNTED WITH THEIR INDIVIDUAL KEYHOLE MOUNTING FEATURE. DO NOT MOUNT BISTRO LIGHTS BY USING THE MAIN ELECTRICAL CORD OR THE INDIVIDUAL DROP CORDS.
- BISTRO LIGHTS ARE DESIGNED TO BE LINKED BY USING THEIR ELECTRICAL PLUGS AND RECEPTACLES TO A MAXIMUM DISTANCE OF 750 FEET.
- BISTRO LIGHT INTERCONNECTING RECEPTACLES ARE INTENDED ONLY FOR THE LINKING OF COMPATIBLE BISTRO LIGHT STRINGS. DO NOT USE BISTRO LIGHT RECEPTACLES FOR ANY OTHER ELECTRICAL PURPOSE.
- DO NOT MOUNT BISTRO LIGHTS IN ANY POSITION WHERE THE BULB IS FACING UP.
- DO NOT ALLOW THE LED LAMP ASSEMBLIES TO BE IN CONTACT WITH COMBUSTIBLE MATERIALS. LED LAMP ASSEMBLIES SHOULD HANG FREELY AND NOT BE SUSCEPTIBLE TO REPETITIVE DAMAGE CAUSED BY ENVIRONMENTAL CONDITIONS SUCH AS WIND, RAIN, AND ICE.
- NOT INTENDED FOR INSTALLATION IN CEILINGS, SOFFITS, CABINETS, ATTICS, OR OTHER ENCLOSED SPACES.

BY
JASCO®

Felicitaciones por su reciente compra de las luces Enbrighten Bistro. Las luces Enbrighten Bistro están diseñadas para brindar iluminación de por vida. ¡Nunca volverá a cambiar una bombilla! ¡Compre bombillas de iluminación adicionales para formar una cadena continua de hasta 750 pies!

IMPORTANTE: Antes de la instalación, lea todas las advertencias que se incluyen en el reverso de este instructivo.




Para una instalación correcta, siga todos los pasos que se detallan a continuación:

Paso 1 - INSTALACIÓN INICIAL

- 1 - Saque de la caja las luces Bistro con cuidado. Quite los alambres de sujeción (consulte las advertencias en el lado reverso de este instructivo).
- 2 - Al instalar las luces Bistro en exteriores, se debe usar un interruptor de circuito de fallos de conexión a tierra (GFCI). Antes de instalar las luces Bistro, enchúfelas en un interruptor de circuito de fallos de conexión a tierra (GFCI) para asegurarse de que las luces funcionarán correctamente. IMPORTANTE: Desenchufe las luces Bistro antes de proceder con la instalación.

Paso 2 - INSTALACIÓN DE LAS LUCES BISTRO

- 1 -IMPORTANTE: Solo instale las luces Bistro en estructuras sólidas de soporte como vigas, viguetas, travesaños u otra superficie de montaje sólida.
- 2 - Cada luz Bistro está diseñada con un orificio universal para poder instalarlas de forma que queden colgando. Para instalarlas se puede utilizar tornillos, clavos, presillas, ganchos, etc. (no incluidos).
- 3 - Para instalar las luces Bistro, también se deben utilizar cables guías que cumplan con los códigos eléctricos y de construcción locales.
- 4 - Una vez que determine la ubicación del enchufe GFCI, el lugar en donde se instalarán las luces y los accesorios necesarios, comience la instalación de las luces Bistro.
- 5 - Una vez instaladas las luces Bistro, conecte el extremo macho en el enchufe GFCI y ponga firmemente la tapa del tomacorriente hembra sobre el enchufe que no se usó.

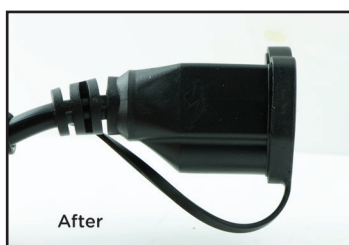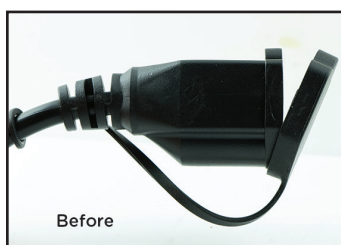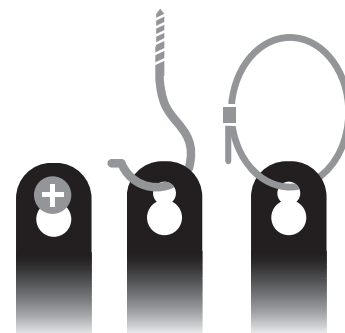

Disponible en distintas longitudes en
www.byjasco.com

Paso 3 - INSTALACIÓN DE JUEGOS DE LUCES BISTRO MÚLTIPLES

Amplíe la longitud de sus luces conectando más de un cable para formar una cadena continua de hasta 750 pies. Siga los pasos de instalación anteriores asegurándose de que cada conexión entre cables quede fija. Al completar la instalación, coloque con firmeza la tapa del tomacorriente hembra sobre el enchufe que no se usó.

Longitud, pies	Bulbo	Modelo No.
12	6	38353
24	12	38356
48	24	38357

Vea el reverso para la calificación eléctrica.

Paso 4 - DESINSTALACIÓN DE LAS LUCES BISTRO

- 1 - Siempre desenchufe las luces Bistro del tomacorriente antes de quitarlas.
- 2 - Quite cada bombilla por separado del accesorio de montaje.
NOTA: Para su seguridad, nunca tire ni jale del accesorio de montaje.
- 3 - Guarde las luces en un lugar seco.

GUARDE ESTE INSTRUCTIVO

- LAS LUCES BISTRO ESTÁN DISEÑADAS PARA INSTALARSE UTILIZANDO EL OFICIO DE INSTALACION. NO LAS INSTALE UTILIZANDO EL CABLE ELÉCTRICO FIRMADO EN LOS CABLES COLGANTES INDIVIDUALES.
- LAS LUCES BISTRO ESTÁN DISEÑADAS PARA CONECTARSE CON SUS RESPECTIVOS ENCHUFES ELÉCTRICOS Y TOMACORRIENTES A UNA DISTANCIA MÁXIMA DE 750 PIES.
- LAS TOMACORRIENTES DE CONEXIÓN DE LAS LUCES BISTRO ESTÁN SOLO DISEÑADOS PARA CONECTAR LOS CORDONES DE LUCES BISTRO COMPATIBLES. NO USE LOS TOMACORRIENTES DE LAS LUCES BISTRO PARA NINGÚN OTRO EQUIPO ELÉCTRICO.
- NO INSTALE LAS LUCES BISTRO EN NINGUNA POSICIÓN EN LA QUE LAS BOMBILLAS QUEDEN MIRANDO HACIA ARRIBA.
- NO PERMITA QUE LA UNIDAD DE LA LÁMPARA LED ENTRE EN CONTACTO CON MATERIALES INFLAMMABLES. EL NINGÚN TIPO DE LÁMPARA LED DEBE COLGAR EN OBSTÁCULOS.
- NO DEBEN ESTAR EXPUESTAS A POSIBLES DAÑOS REPETITIVOS CAUSADOS POR LAS CONDICIONES CLIMÁTICAS COMO EL VIENTO, LA LLUVIA Y EL HIELO.
- NO DEBEN INSTALARSE EN CIELO RASO, SOROS, MUEBLES, CIELOS U OTROS LUGARES CERRADOS.