




EnergyShroom PB401

Thank you for choosing EnergyShroom PB401 Power Bank. It is a high-capacity, 20000mAh portable charging device that utilizes Li-ion polymer battery and is built for a safe, fast and efficient user experience. It charges your beloved devices such as cell phones, tablets, MP3 players, digital cameras, etc. It has both Micro USB and Type-C (2-way) input interfaces and 2 USB-A & 1 Type-C (2-way) output interfaces to make for smoother connectivity.

Contents -

- 1x EnergyShroom (PB401)
- 1x Manual
- 1x Type-C Cable
- 1x Warranty Card

Product Overview -

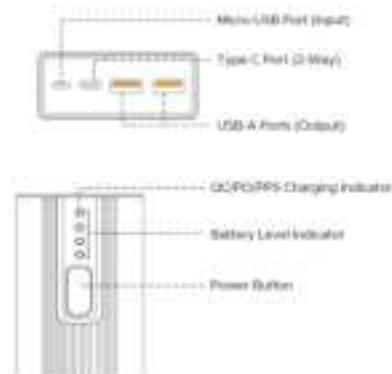

Features

- Supports Micro USB as well as Type-C (2-Way) charging input ports along with 2 USB-A and a Type-C (2-Way) Output ports.
- Built-in 2-layer Smart IC protection from short circuit, over charge & over discharge.
- Intelligent input/output control and LED indicators.
- Supports 3 new 32.5W(Max) fast charging including Quick Charge 3.0, Power Delivery and PPS protocol support.
- Ultra-compact and Durability including High Temperature and Scratch Resistance with sleek Aluminum casing.
- Pass-through charging allows charging the power bank while it charges your devices.

LED Functions

- Press the power button once to switch the LED indicator on and see the charging status of the power.

1 LED in solid light	0-25%
2 LED in solid light	25-50%
3 LED in solid light	50-75%
All LED in solid light	75-100%

- The LED indicator will turn on to indicate the battery status of the power bank.
- When your power bank is device uses Quick Charge 3.0, Power Delivery or PPS fast charging/recharging, the top LED indicator will turn green.

Button Functions

- Press the power button once to switch the LED indicator on and see the power bank's charging status.
- To turn the LED off, press the power button twice.
- Press and hold the power button to stop the powerbank from charging your device, press it once again to continue charging.

Charging EnergyShroom PB401

- Connect the Micro-USB/Type-C connector to the Micro-USB/Type-C port of the power bank.
- Then connect the USB-A/Type-C connector to the adapter or fast computer USB port.
- An LED will glow to indicate charging, resuming the battery at the powerbank. An LED will light up when the power bank is fully charged.
- If you are charging your power bank with a compatible Quick Charge 3.0, Power Delivery or PPS fast charger, the top LED indicator will turn green.

Note: Computer USB port output is less than the wall adapter.

Charging Your Devices

- Please connect the device to the power bank using the USB-A/Type-C connector for charging.
- To use the power bank doesn't start automatically single press the power button to begin charging.
- If your device supports Quick Charge 3.0, Power Delivery or PPS fast charging while charging your devices, the top LED indicator will turn green.
- When held down, the power button shows any device charging taking place.

Note: If you are charging your device and power bank at the same time using the Pass-through charge-discharge feature, it will result in slower charging and discharging speed.

Charging norms & Precautionary Guidelines -

- 1) Charger/Brock/Adapter : 5V/2A
- 2) Cable/Wire : Standard Cable (25 strands (16 Strands diameter) strand)
- Any other accessory can be paired up with the product as long as the specifications are as per above norms.

Product Specification

Capacity	20000mAh (3.7V/74Wh)
Rated Capacity	10000mAh 5.0V (7V/24Wh)
Dimension	148.8 x 68.7 x 28.8mm
Battery Type	Li-ion polymer
Input	DC 5V/2A, 9V/2A, 12V/1.6A (Micro) DC 5V/2A, 9V/2A, 12V/1.6A (Type-C)
Input Ports	1x Micro-USB, 1x Type-C (2-way)
Output Ports	2x USB-A, 1x Type-C (2-way)
Output (USB-A)	5V/2A, 9V/2.22A, 12V/1.67A, 5V/4.5A
Output (Type-C)	5V/2A, 9V/2.22A, 12V/1.67A, 5V/4.5A (PPS)
Fully Charged by 5V 2.0A adapter	4.5 hrs. 30 min x 10 min
Fully Discharged by 10W load	3 hrs 30 min x 10 min
Operating Temperature	-10 to 40° Celsius
Overcurrent Protection	Protection (3.0V/2.2A)
Over Charging Voltage Protection	16.0V/5.0V
Short Circuit Protection	Protection
Working Temperature (54-28°)	Yes (28-40° Celsius)

Important User Instructions

- Please always use the correct Type-C charging cable to charge the device.
- It is recommended to charge the power bank fully before its first use.
- Do not leave the power bank inside the car during winter/summer.
- The product should be kept away from any physical shock or vibration.
- Keep out of reach of children.
- If the power bank gets discharged completely, make sure to charge it fully before using.
- Do not leave the battery with charge for over 24 hours.
- Charging at low and voltage should not exceed the maximum specified amount.

Warning

- Do not throw, burn, crush, pierce the device or immerse it in liquid.
- Do not put the product in water, exposed to fire or direct sunlight.
- Do not use the product around combustible gas. If you catch the device on fire, stop using it.
- Do not disassemble or attempt to make it in a computer battery under any circumstances, as it may damage the device permanently.

E- Waste Management

- As per government rules, EEC wastes are to be managed by effective treatment under specified responsibilities prescribed by the local or state.
- Do not throw the product as unsorted municipal waste. The waste will be treated as per the norms set by the pollution control board. Please contact customer care for getting guidance on proper disposal of the product.

Front

Back