

Instruction Sheet

Follow these steps to update the fryer and install FQLink.

Subject: FQ4000 Casey's FQLink Installation Instructions

Models affected: Casey's FilterQuick 4000 (Touch Screen) Fryers

8.19.25

STEP 1: UPDATE THE FRYER SOFTWARE

1. Locate the USB with the **FRYER SOFTWARE FILES** and follow the enclosed instructions to update the fryer software using the USB port on the **FAR-LEFT** side of the fryer, just inside the left fryer door (see Figure 1).
The software versions after update should be:
UIC – 10.00.141; VIB – 01.03.003; FIB – 10.00.061



Figure 1

STEP 2: DISCONNECT KCCM/MODEM (IF INSTALLED)

1. Disconnect power from the fryer.
2. Remove the two screws attaching the controller to the fryer (see Figure 2).
3. Disconnect the RJ11 KCCM CAN/power harness (see Figure 3) from the FIB board.
4. Zip tie the harness up out of the way.
5. Connect the supplied RJ11 CAN terminator to the connector on the FIB board from step 6 above (see Figure 4).
6. Reconnect power to the fryer.



Figure 2

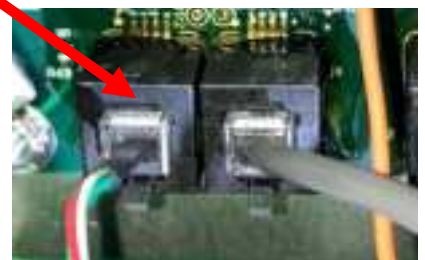


Figure 3



Figure 4

STEP 3: INSTALL THE IoT AGENT SOFTWARE

1. Ensure all controllers are OFF and in the standby mode (see Figure 5).




Figure 5

2. On the left screen, press  →  →  → 9000 →  → TECH MODES  → SOFTWARE UPGRADE

3. Locate the USB with the **IoT AGENT SOFTWARE FILES** and insert the USB drive into the USB port, just inside the fryer door (see Figure 6). The USB port may differ in appearance based on date of manufacture.
4. Press **YES** when the screen displays **READING COMPLETED**.
5. Press **YES** when the screen displays **ALLOW 30 MINUTES FOR SOFTWARE UPGRADE. NO FRYING. UPDATE NOW?**
6. While updating the controller displays various messages. Once the update is finished it will either reboot the left controller, if deploying for the first time or instructions remove USB and power cycle.
7. Remove the USB flash drive and lower cover over the USB slot.
8. Press the **YES** button to confirm.
9. The screen displays **UPGRADE COMPLETED, POWER CYCLE SYSTEM**.
10. Power cycle the system for **60 SECONDS**. Failure to press and hold the **reset switch long enough, may cause an incomplete software update**.
11. Wait two (2) minutes and press the **"HOME"** button on the (see Figure 7).
12. Press the **?** button (see Figure 8).
13. Press the down arrow button (see Figure 9).
14. Press the software version button (see Figure 10).
15. Press the down arrow button **TWO** (2) times (see Figure 11).
16. The **GATEWAY SOFTWARE VERSION** should be **60.99.037** (see Figure 12). If not, repeat steps 1-10 of this section. If after two tries of loading the software



Figure 6



Figure 7



Figure 8



Figure 9

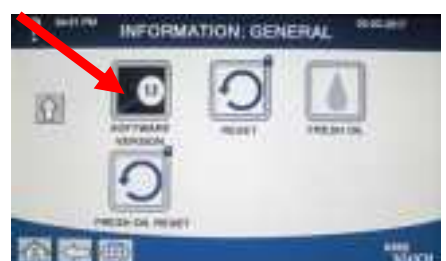


Figure 10



Figure 11

and the version below is **NOT** displayed, go to STEP 4 (Troubleshooting) on the last page.

17. Press the "HOME" button (see Figure 7) when finished.

18. This concludes installing hardware and updating software. The instructions on the following pages are for techs that are connecting the fryer to the cloud.




Figure 12

Appendix A

STEP 1: EDIT THE CONFIG SETTINGS








1. Press  →  →  → **9000** →  →  **6X** → **CONNECTIVITY**
2. Select **SERIAL NUMBER**.
3. Enter the serial number located inside the door of the far-left fryer and press **✓**.
4. Controller displays **SETUP COMPLETE RESTART THE SYSTEM**.
5. Select **MODEL NUMBER**.
6. Enter the model number that is located inside the door of the far-left fryer and press **✓**.
7. Select **NUMBER OF UIs**.
8. Select the number of controllers in the battery of fryers and press **✓**.
9. Press **✓**.
10. Select **SSID**.
11. Enter the SSID address of the store network to connect the fryer to and press **✓**.
12. Controller displays **SETUP COMPLETE RESTART THE SYSTEM**.
13. Press **✓**.
14. Press .
15. Select **PASSWORD**.
16. Enter the network password and press **✓**.
17. Controller displays **SETUP COMPLETE RESTART THE SYSTEM**.
18. Press **✓**.
19. Press .
20. Power cycle the entire fryer by **PRESSING** and **HOLDING** the black toggle reset switch for **60 SECONDS**. The reset switch is located either under the USB port, near the USB port or under the control box (see Figures 12 and 13).



Figure 12



Figure 13

STEP 2: CONFIRM THE IP ADDRESS

1. **WAIT FIVE (5) MINUTES**

before proceeding to the next step.

2. Press the **"HOME"** button on the (see Figure 14).



Figure 14

3. Press the **?** button (see Figure 15).



Figure 15

4. Press the down arrow button (see Figure 16).



Figure 16

5. Press the software version button (see Figure 17).

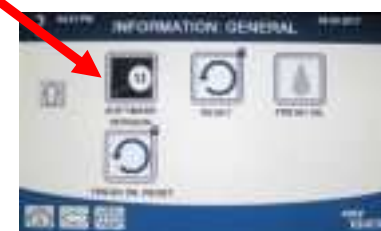


Figure 17

6. Press the down arrow button **TWO (2)** times (see Figure 18).



Figure 18

7. The **GATEWAY CONNECTION STATUS** should be **CONNECTED** (see Figure 19). If not, wait 5 minutes and recheck.

8. The **GATEWAY IP ADDRESS** is shown. The **GATEWAY SOFTWARE IP ADDRESS**

should have some numbers that are **NOT ALL ZEROS**

(see Figure 19). **NOTE: The**

IP address WILL be

different than shown (see

Figure 19). If only zeros are

shown, power cycle the entire fryer battery and wait 5-10 minutes before checking the software version and IP address again. **NOTE: An IP address should NOT start**

with 4 or 82. If so, then it is **NOT** connected. If is not connected, repeat steps 1-7 of this section. If after two tries of loading the software and the version above is **NOT** displayed, go to STEP 5 (Troubleshooting) on the last page.

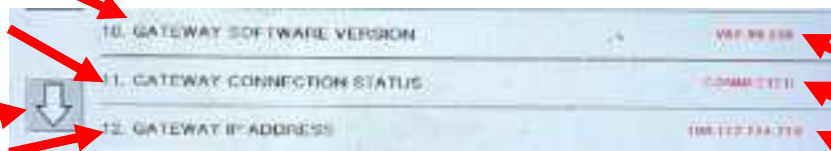


Figure 19

9. Press the down arrow button (see Figure 19).

10. View the Gateway signal strength (see Figure 20).



Figure 20

It should show a strength of 1/5 to 4/5. The higher the number the better. If it displays 0/5, it does NOT have a connection to cell or Wi-Fi service. See item #2 on page 5.

-
11. Confirm the IO address matches with what the router displays.
 12. Press the "HOME" button (see Figure 14) when finished.

STEP 3: CONFIRM THE UNIT APPEARS IN THE CLOUD

1. Confirm that the unit appears online in the cloud.

STEP 4: VERIFY DATA IN THE CLOUD

1. Perform a cook on the fryer.
2. Perform a filter on the fryer.
3. Confirm that the cloud displays the proper cooks and filters performed on the fryer.

STEP 5: TROUBLESHOOTING

1. If the software version is all zeros (0), **WAIT AN ADDITIONAL FIVE (5) MINUTES and recheck using steps 1-7 in STEP 2 (Confirm the IP address).**
2. The first number on gateway signal strength (refer to Figure 21) (Gateway Signal Strength Quality) which is shown at 4/5.
Below is breakdown of first number:
 - a. 4 = Excellent signal; always associated; lightning fast.
 - b. 3 = Good signal; always associated; very fast.
 - c. 2 = Fair signal; always associated; usually fast.
 - d. 1 = Poor signal; mostly associated; mostly slow.
 - e. 0 = No signal; not associated; no go.
3. If the IP address is not being displayed but the link quality and signal strength are good, then the modem or KitchenConnect has some issues and/or configuration file needs to be confirmed for accuracy and updated again.



Figure 21