




English
한국어
Português
Español
Deutsch
Italian
Japan

Русский язык
ประเทศไทย
France
Україна
Indonesia
Türkiye

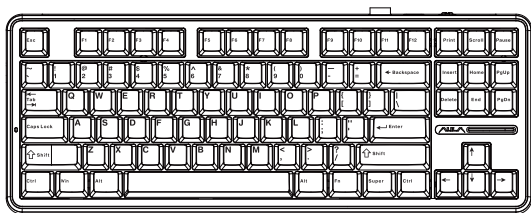

WIND
F87


3 IN 1 HOT-SWAPPABLE
RGB GASKET MECHANICAL KEYBOARD



- Stylish exterior design, 87-key layout, GASKET structure, delicate and soft hand feeling.
- Keycaps and mechanical switches are pluggable, and users can also purchase switches and personalized keycaps for free DIY.
- The keyboard is made of solid materials and the keys are responsive.
- Dual adjustable foot support, hidden receiver storage.
- Return of rate:125Hz.
- All keys anti-ghosting for all connection modes.

Wired Mode Turn ON/OFF

02



① Switch to [USB/OFF] mode

② Plug the Type-C cable into the port on the keyboard

③ Plug another USB into your computer's USB port.

Instructions for switching on and off



- Turn the mode switch to USB/OFF(not plugged into the USB power supply), the keyboard is turned off and the built-in battery stops powering the keyboard.

2.4G Connection Instructions

03



① Switch to [2.4G] mode


② Remove the [USB Receiver] from the upper right corner slot of the keyboard.

③ Plug into your computer's USB port to use




Short press FN+`~ into 2.4G Mode

- Manual pairing: Long press the key combination "FN+'~" for about 3 seconds, the key "'~" start fast flash cyan light, keyboard enter code pairing state. At this time, plug the USB receiver into the USB port of your computer. Then finished.

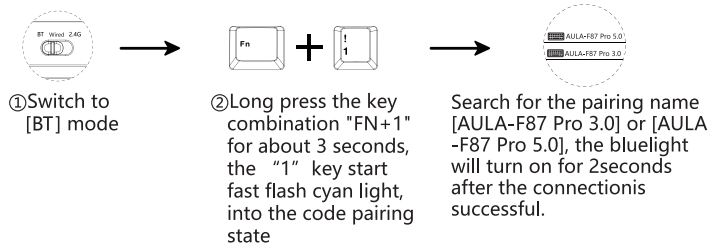

Quick Mode Switching with Key Combo:



- In BT mode, keyboard can be connected to three devices.
- Short press FN+ 1/2/3 to switch to BT1/BT2/BT3.
- In BT mode, keyboard battery level can be displayed on the computer.

Backlight Effect Adjustment

FN+INS key combination to switch 16 light effects				
Wave (Restore default rear light effect)	Follow wave	F(x)	Pinwheel	Waterfalls
Flower	Game mode	Turn off	LIGHT	Breath
Rainbow	Burst	Rainy	Wave_2	Stars
River				

Backlight Effect Key Combo Adjustment

Fn +	Insert	Switching light effect modes
	Delete	Switching light color
	↑	Increased light brightness

Fn +	↓	Reduced light brightness
	←	
	→	

- Use 10 different music rhythm RGB light effects with the driver.

RGB Light Strip Adjustment

RGB Sidelight Adjustment

Fn +	Left Shift	Switching light effect modes
	Z	Switching light color
	B	Switching battery indicator mode

Fn +	Right Shift	Side light mode switching
	? /	Side light color switching
	Right Alt	Sidelight brightness cycle switching
	Right Ctrl	Sidelight speed cycle switching

OS Switching

06

- FN+WIN=Lock/Unlock WIN key (in WIN system, when locking WIN key indicator light is always on, WIN key can not be used).
- Under Windows system, if you switch to MAC/IOS system mode, the position of WIN and ALT keys will be exchanged, and F1-F12 are the multimedia function buttons.

Fn +	Q	Android
	W	Windows

Fn +	E	MAC
	R	IOS

Step 1: Switch the mode switch to the corresponding gear

FN+	ESC	Long press for 3 seconds to restore factory settings	FN+	1	Bluetooth device 1#
	~	Long press for 3 seconds, 2.4G matching		2	Bluetooth device 2#
	WIN	Lock the WIN key, the WIN key can not be used when locked		3	Bluetooth device 3#

- FN+ESC long press for three seconds = restore default state, connected BT devices will not be cleared

FN+Q switch to Android system mode (Q key red light flashes 3S), F area single press function and F area FN combination function

Key Position	Single press	FN key combo
F1	Screen brightness -	F1
F2		F2
F3	Convert window	F3
F4	Back to desktop	F4
F5	Light rightness -	F5
F6	Light rightness+	F6

Key Position	Single press	FN key combo
F7	Previous song	F7
F8	Play/Pause	F8
F9	Next song	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12

**FN+W switch to WINDOWS system mode (W key red light flashes for 3s),
F area single press function and F area FN combination function**

Key Position	Single press	FN key combo
F1	F1	Desktop
F2	F2	Mail
F3	F3	Convert window
F4	F4	Open explorer
F5	F5	Light brightness -
F6	F6	Light brightness +

Key Position	Single press	FN key combo
F7	F7	Previous song
F8	F8	Play/Pause
F9	F9	Next song
F10	F10	Mute
F11	F11	Volume -
F12	F12	Volume +

FN+E switch to MAC system mode (E key red light flashes 3S), F area single press function and F area FN combination function

Key Position	Single press	FN key combo
F1	Screen brightness -	F1
F2		F2
F3	Convert window	F3
F4	Back to desktop	F4
F5	Light rightness-	F5
F6	Light rightness+	F6

Key Position	Single press	FN key combo
F7	Previous song	F7
F8	Play/Pause	F8
F9	Next song	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12

FN+R switch to IOS system mode (R key red light flashes 3S), F area single press function and F area FN combination function

Key Position	Single press	FN key combo
F1	Screen brightness -	F1
F2	Screen brightness+	F2
F3		F3
F4	Back to desktop	F4
F5	Light brightness-	F5
F6	Light brightness+	F6


Key Position	Single press	FN key combo
F7	Previous song	F7
F8	Play/Pause	F8
F9	Next song	F9
F10	Mute	F10
F11	Volume -	F11
F12	Volume +	F12

Press and hold FN to view:

Current link mode (2.4G, BT, wired); current BT channel (channel 1/2/3)

Current system mode (android, win, mac,ios)


Press and hold FN, the keys corresponding to the above different keyboard modes will light up, release FN to restore the normal lighting effect.

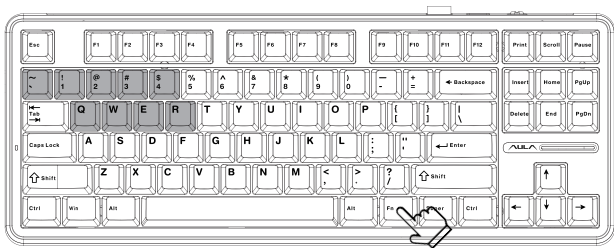

- 2.4G mode corresponding key indicator = "~" key
- Wired mode corresponding key indicator = "4" key
- BT channel corresponding key indicator = "1,2,3" key
- Operation system mode key indicator = "Q,W,E,R".

- BT/2.4G mode automatically enters power-saving mode (lights off) after one minute without any operation, and wakes up the keyboard by clicking a key.

Charging Instructions for Use

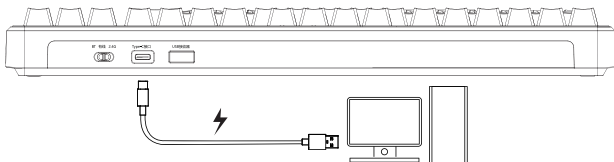

- Connect the keyboard to the computer via the provided USB cable to charge the keyboard. The RGB ambient light bar streamer shows when charging, and the green light stays on when fully charged.
In 2.4G/BT mode (no USB plugged in), the RGB ambient light bar can display the keyboard power by FN+B. The green light shows when fully charged. As the power is consumed, the green light gradually decreases, and the low battery indicator turns red. Type-C connectivity is more reliable and performance is more stable.

  Charging instructions	1. It is recommended to use only the computer USB port to charge the keyboard. 2. Do not use fast-charging cell phone chargers to charge the keyboard. 3. Do not use inferior non-standard power adapter to charge the keyboard. 4. Do not use over-voltage and over-current power adapter to charge the keyboard. 5. Please keep away from high temperature equipment when charging 6. Please turn off the power switch if it is not used for a long time. The above charging instructions also apply to other devices with charging function (keyboard/mouse/headphones/speakers, etc.)
---	---

- Number of keys: 87
- Total travel: 4.0mm
- FN mult-function key
- Size: 365.90×139.00×41.10±1mm
- Charging voltage, current: DC 5V $\equiv$ 600mA
- Rated voltage: DC 3.7V fully charged 4.2V
- Battery capacity: Rechargeable lithium battery
- Rated current: 180mA @3.7V (default lighting)
15 mA(turn off all the lights.)
- Charging interface: type-c interface



Battery capacity	4000mAh	8000mAh
Weight	About 916g (without cable, receiver) About 935g (with cable, receiver)	About 987g (without cable, receiver) About 1006g (with cable, receiver)
Battery life	Approx. 22 hours (default light effect) Approx. 266 hours (all lights off)	Approx. 44 hours (default light effect) Approx. 532 hours (all lights off)

- Computer system requirements
Wired, 2.4G mode: Support WINDOWS ALL operating systems (XP, WIN7, WIN8, WIN10), under WIN95, WIN98 systems, drivers may be required.
Wired Mode/2.4G Receiver: Configured with USB version 1.1 or above interface.
BT Device Name "AULA-F87 Pro 3.0": WIN7 and lower systems
BT Device Name "AULA-F87 Pro 5.0": WIN8, WIN10 and above.
BT Mode: MAC computer with BT BT3.0, BLE4.0, BLE5.0
and above hardware, Android phone or tablet, IOS phone or tablet.
- Hardware connection
Wired USB/2.4G receiver supports hot-swapping (plug and play).

- Number of keys: 87
- Total travel: 4.0mm
- FN Mult-function key
- Size: 365.90×139.00×41.10±1mm
- Weight: About 826g (without cable)/About 850g(with cable)
- Rated voltage: DC 5V
- Rated current: ≤250mAh
- Charging interface: type-c interface
- Computer system requirements: Support WINDOWS ALL operating systems (XP, WIN7, WIN8, WIN10), under WIN95, WIN98 systems, drivers may be required. Configured with USB version 1.1 or above interface.
- Hardware connection: Wired USB supports hot-swapping (plug and play)

제품 매개변수

- 키 수: 87
- 총 이동 거리: 4.0mm
- FN 다기능 키
- 크기: 365.90×139.00×41.10±1mm
- 무게: 약 826g(케이블 제외)/약 850g(케이블 포함)
- 정격 전압: DC 5V
- 정격 전류: ≤250mAh
- 충전 인터페이스: type-c 인터페이스
- 컴퓨터 시스템 요구 사항: WINDOWS 모든 운영 체제(XP, WIN7, WIN8, WIN10) 지원, WIN95, WIN98 시스템에서는 드라이버가 필요할 수 있음. USB 버전 1.1 이상 인터페이스로 구성됨.
- 하드웨어 연결: 유선 USB는 핫 스와핑(플러그 앤 플레이)을 지원합니다.

Parâmetros do produto

PT

- Número de teclas: 87
- Curso total: 4,0 mm
- Tecla FN multifunção
- Tamanho: 365,90×139,00×41,10±1 mm
- Peso: Cerca de 826 g (sem cabo)/Cerca de 850 g (com cabo)
- Tensão nominal: DC 5 V
- Corrente nominal: ≤250 mAh
- Interface de carregamento: interface tipo C
- Requisitos do sistema do computador: Suporta todos os sistemas operacionais WINDOWS (XP, WIN7, WIN8, WIN10), em sistemas WIN95, WIN98, drivers podem ser necessários. Configurado com interface USB versão 1.1 ou superior.
- Conexão de hardware: USB com fio suporta troca a quente (plug and play)

Parámetros del producto

ES

- Número de teclas: 87
- Recorrido total: 4,0 mm
- Tecla multifunción FN
- Tamaño: 365,90 × 139,00 × 41,10 ± 1 mm
- Peso: aproximadamente 826 g (sin cable)/aproximadamente 850g (con cable)
- Voltaje nominal: 5 V CC
- Corriente nominal: ≤250 mAh
- Interfaz de carga: interfaz tipo C
- Requisitos del sistema informático: compatible con TODOS los sistemas operativos WINDOWS (XP, WIN7, WIN8, WIN10), en sistemas WIN95, WIN98, es posible que se requieran controladores. Configurado con interfaz USB versión 1.1 o superior.
- Conexión de hardware: USB con cable compatible con intercambio en caliente (plug and play)

Parametri del prodotto

IT

- Numero di tasti: 87
- Corsa totale: 4,0 mm
- Tasto multifunzione FN
- Dimensioni: 365,90 × 139,00 × 41,10 ± 1 mm
- Peso: circa 826 g (senza cavo)/circa 850 g (con cavo)
- Tensione nominale: DC 5 V
- Corrente nominale: ≤ 250 mAh
- Interfaccia di ricarica: interfaccia di tipo C
- Requisiti di sistema del computer: supporta TUTTI i sistemi operativi WINDOWS (XP, WIN7, WIN8, WIN10), nei sistemi WIN95, WIN98, potrebbero essere necessari driver. Configurato con interfaccia USB versione 1.1 o superiore.
- Connessione hardware: USB cablata supporta hot-swapping (plug and play)

Produktparameter

DE

- Anzahl der Tasten: 87
- Gesamthub: 4,0 mm
- FN-Mehrfunktionstaste
- Größe: 365,90 × 139,00 × 41,10 ± 1 mm
- Gewicht: ca. 826 g (ohne Kabel)/ca. 850 g (mit Kabel)
- Nennspannung: DC 5 V
- Nennstrom: ≤ 250 mAh
- Ladeschnittstelle: Typ-C-Schnittstelle
- Computersystemanforderungen: Unterstützt ALLE WINDOWS-Betriebssysteme (XP, WIN7, WIN8, WIN10). Unter WIN95- und WIN98-Systemen sind möglicherweise Treiber erforderlich. Konfiguriert mit USB-Schnittstelle der Version 1.1 oder höher.
- Hardwareverbindung: Kabelgebundenes USB unterstützt Hot-Swapping (Plug and Play)

- จำนวนปุ่ม: 87
- ระยะกดรวม: 4,0 มม.
- ปุ่ม FN มัลติฟังก์ชัน
- ขนาด: 365,90×139,00×41,10±1 มม.
- น้ำหนัก: ประมาณ 826 กรัม (ไม่รวมสาย)/ประมาณ 850 กรัม (มีสาย)
- แรงดันไฟฟ้าที่กำหนด: DC 5 V
- กระแสไฟฟ้าที่กำหนด: ≤250 mAh
- อินเทอร์เฟซการชาร์จ: อินเทอร์เฟซ Type-C
- ข้อกำหนดของระบบคอมพิวเตอร์: รองรับระบบปฏิบัติการ WINDOWS ทั้งหมด (XP, WIN7, WIN8, WIN10) ภายใต้ระบบ WIN95, WIN98 อาจต้องมีไดรเวอร์ กำหนดค่าด้วยอินเทอร์เฟซ USB เวอร์ชัน 1.1 ขึ้นไป
- การเชื่อมต่อฮาร์ดแวร์: USB แบบมีสายรองรับการสลับเปลี่ยนขณะใช้งาน (ปลั๊กแอนด์เพลย์)

พารามิเตอร์ผลิตภัณฑ์

- จำนวนปุ่ม: 87
- ระยะกดรวม: 4.0 มม.
- ปุ่ม FN มัลติฟังก์ชัน
- ขนาด: 365.90×139.00×41.10±1 มม.
- น้ำหนัก: ประมาณ 826 กรัม (ไม่รวมสาย)/ประมาณ 850 กรัม (มีสาย)
- แรงดันไฟฟ้าที่กำหนด: DC 5V
- กระแสไฟฟ้าที่กำหนด: ≤250mAh
- อินเทอร์เฟซการชาร์จ: อินเทอร์เฟซ Type-C
- ข้อกำหนดของระบบคอมพิวเตอร์: รองรับระบบปฏิบัติการ WINDOWS ทั้งหมด (XP, WIN7, WIN8, WIN10) ภายใต้ระบบ WIN95, WIN98 อาจต้องมีไดรเวอร์ กำหนดค่าด้วยอินเทอร์เฟซ USB เวอร์ชัน 1.1 ขึ้นไป
- การเชื่อมต่อฮาร์ดแวร์: USB แบบมีสายรองรับการสลับเปลี่ยนขณะใช้งาน (ปลั๊กแอนด์เพลย์)



ИНСТРУКЦИЯ ПО ПРИМЕНЕНИЮ

Пожалуйста, прочитайте инструкцию перед первым использованием.

Спасибо за выбор продуктов AULA.

Компьютерные Клавиатура и мышь – основные устройства управления компьютером, предназначены для ввода данных (могут быть проводными или беспроводными (2.4 ГГц с передатчиком в комплекте или Bluetooth без передатчика)).

Компьютерная гарнитура является устройством ввода/вывода данных, предназначена для ввода данных (голоса) посредством микрофона и для вывода данных через наушники. (Могут быть проводными и беспроводными (2.4ГГц, Bluetooth, 2.4ГГц+ Bluetooth)).

Коврик для компьютерной мыши необходим, чтобы обеспечить хорошее сцепление с поверхностью и добиться оптимального скольжения мыши. Коврик устанавливается на поверхности стола, мышь помещается сверху.

Стенд/Подставка для ноутбука/планшета необходима для размещения устройства под удобным углом для работы/игр и дополнительного охлаждения.

Колонки 2.0/2.1 предназначены для воспроизведения музыки и других аудио файлов, подключаются к ПК, ноутбукам, планшетам, смартфонам через разъем 3.5 мм, питаются от USB.

USB хаб - это устройство, позволяющее подключить в 1 порт Type-C ряд устройств, таких как: устройства ввода, накопители памяти, дополнительные мониторы и проводной интернет.

Подробные характеристики товара находятся на сайте www.aulagaming.ru

Подключение:

Аккуратно распакуйте изделие. Разместите на столе, подключите к компьютеру, к свободному порту USB/аудиоразъему (для гарнитур/ колонок) и проверьте работоспособность.

Изготовитель: DONGGUAN SUOAI ELECTRONICS CO.,LTD. Address: NO.3 HUAYU STREET,CHANGLONG VILLAGE HUANGJIANG TOWN,DONGGUAN CITY. Донгуан Суйао Электроникс Ко. ЛТД. Адрес: NO.3 ХУАЮ СТРИТ,ЧАНГЛОНГ ВИЛЛАДЖ ХУАНЖИАНГ ТАУН. ДОНГГУАН СИТИ. Импортёр/Организация уполномоченная принимать претензии: ООО «Техпорт». Адрес: 107140, Москва г, внутригородская территория муниципального округа Красносельский, 1-й Красносельский ПЕР., дом № 9А, офис Этаж 3, Часть Пом. 9В, 9Г. телефон: +79153075886, электронная почта: Dootechport@ya.ru. Товар соответствует требованиям ТР ТС 037/2016 «Об ограничении применения опасных веществ в изделиях электротехники и радиоэлектроники» (для компьютерных мышей, клавиатур и гарнитур/колонок), а так же ТР ТС 020/2011 «Электромагнитная совместимость технических средств» (для колонок, Bluetooth/2.4ГГц гарнитур, клавиатур и мышей с беспроводным способом подключения (Bluetooth/2.4ГГц)). Информация о разрешительной документации размещена на упаковке. Коврики для мыши/стенды/ подставки для ноутбука/планшета обязательной сертификации не подлежат. Информация о гарантийном обслуживании предоставлена на сайте www.aulagaming.ru. Гарантийный срок: 1 год. Срок службы: 2 года. Срок годности: не ограничен. Дата производства указана на упаковке. Использовать только по прямому назначению. Не ронять, не разбирать, беречь от огня, перегрева и попадания жидкости. Конструкция, внешний вид и технические характеристики могут быть изменены без предварительного уведомления. Страна изготовления: Китай.



www.aulagaming.ru

Paramètres du produit

FR

- Nombre de touches : 87
- Déplacement total : 4,0 mm
- Touche multifonction FN
- Taille : 365,90 × 139,00 × 41,10 ± 1 mm
- Poids : environ 826 g (sans câble)/environ 850 g (avec câble)
- Tension nominale : DC 5 V
- Courant nominal : ≤ 250 mAh
- Interface de charge : interface de type C
- Configuration requise : prise en charge de tous les systèmes d'exploitation WINDOWS (XP, WIN7, WIN8, WIN10), sous les systèmes WIN95, WIN98, des pilotes peuvent être requis. Configuré avec l'interface USB version 1.1 ou supérieure.
- Connexion matérielle : l'USB filaire prend en charge l'échange à chaud (plug and play)

Параметри продукту

UKR

- Кількість клавіш: 87
- Загальний хід: 4,0 мм
- Багатофункціональна клавіша FN
- Розмір: 365,90×139,00×41,10±1 мм
- Вага: близько 826 г (без кабелю)/близько 850 г (з кабелем)
- Номінальна напруга: DC 5V
- Номінальний струм: ≤250mAh
- Інтерфейс зарядки: інтерфейс type-c
- Системні вимоги комп'ютера: підтримка BCIX операційних систем WINDOWS (XP, WIN7, WIN8, WIN10), для систем WIN95, WIN98 можуть знадобитися драйвери. Налаштовано з інтерфейсом USB версії 1.1 або вище.
- Апаратне підключення: Дротовий USB підтримує гарячу заміну (plug and play)

- Jumlah tombol: 87
- Total jarak: 4,0 mm
- Tombol multifungsi FN
- Ukuran: 365,90×139,00×41,10±1 mm
- Berat: Sekitar 826 g (tanpa kabel)/Sekitar 850 g (dengan kabel)
- Tegangan terukur: DC 5V
- Arus terukur: ≤250 mAh
- Antarmuka pengisian daya: antarmuka tipe-c
- Persyaratan sistem komputer: Mendukung semua sistem operasi WINDOWS (XP, WIN7, WIN8, WIN10), di bawah sistem WIN95, WIN98, driver mungkin diperlukan. Dikonfigurasi dengan antarmuka USB versi 1.1 atau yang lebih tinggi.
- Koneksi perangkat keras: USB kabel mendukung hot-swapping (plug and play)

Ürün Parametreleri

- Tuş sayısı: 87
- Toplam hareket: 4,0 mm
- FN Çok işlevli tuş
- Boyut: 365,90×139,00×41,10±1 mm
- Ağırlık: Yaklaşık 826 g (kablolu)/Yaklaşık 850 g (kablolu)
- Anma voltajı: DC 5 V
- Anma akımı: ≤250 mA
- Şarj arayüzü: type-c arayüzü
- Bilgisayar sistem gereksinimleri: WINDOWS TÜM işletim sistemlerini destekler (XP, WIN7, WIN8, WIN10), WIN95, WIN98 sistemleri altında sürücüler gerekebilir. USB sürüm 1.1 veya üzeri arayüzle yapılandırılmıştır.
- Donanım bağlantısı: Kablolu USB, sıcak değiştirmeyi (tak ve çalıştır) destekler

- キー数: 87
- 総移動距離: 4.0mm
- FN マルチファンクションキー
- サイズ: 365.90×139.00×41.10±1mm
- 重量: 約 826g (ケーブルなし)/約 850g (ケーブルあり)
- 定格電圧: DC 5V
- 定格電流: ≤250mAh
- 充電インターフェース: タイプ C インターフェース
- コンピューターシステム要件: WINDOWS ALL オペレーティングシステム (XP、WIN7、WIN8、WIN10) をサポート。WIN95、WIN98 システムではドライバーが必要になる場合があります。USB バージョン 1.1 以上のインターフェースで構成。
- ハードウェア接続: 有線 USB はホットスワップ (プラグアンドプレイ) をサポートします。



Dongguan Suoai Electronics CO.,LTD

www.aulastar.com

SOAI Industry Park, Huayu Street Changlong

Village Huangjiang Town Dongguan City

Guangdong Province

Execution Standard:GB/T 14081-2010

Made in China