



名称	Bietrun-WXM15 混音话筒说明书
尺寸	A4对折中线装订 宽29.7x高21cm
材质	A4纸

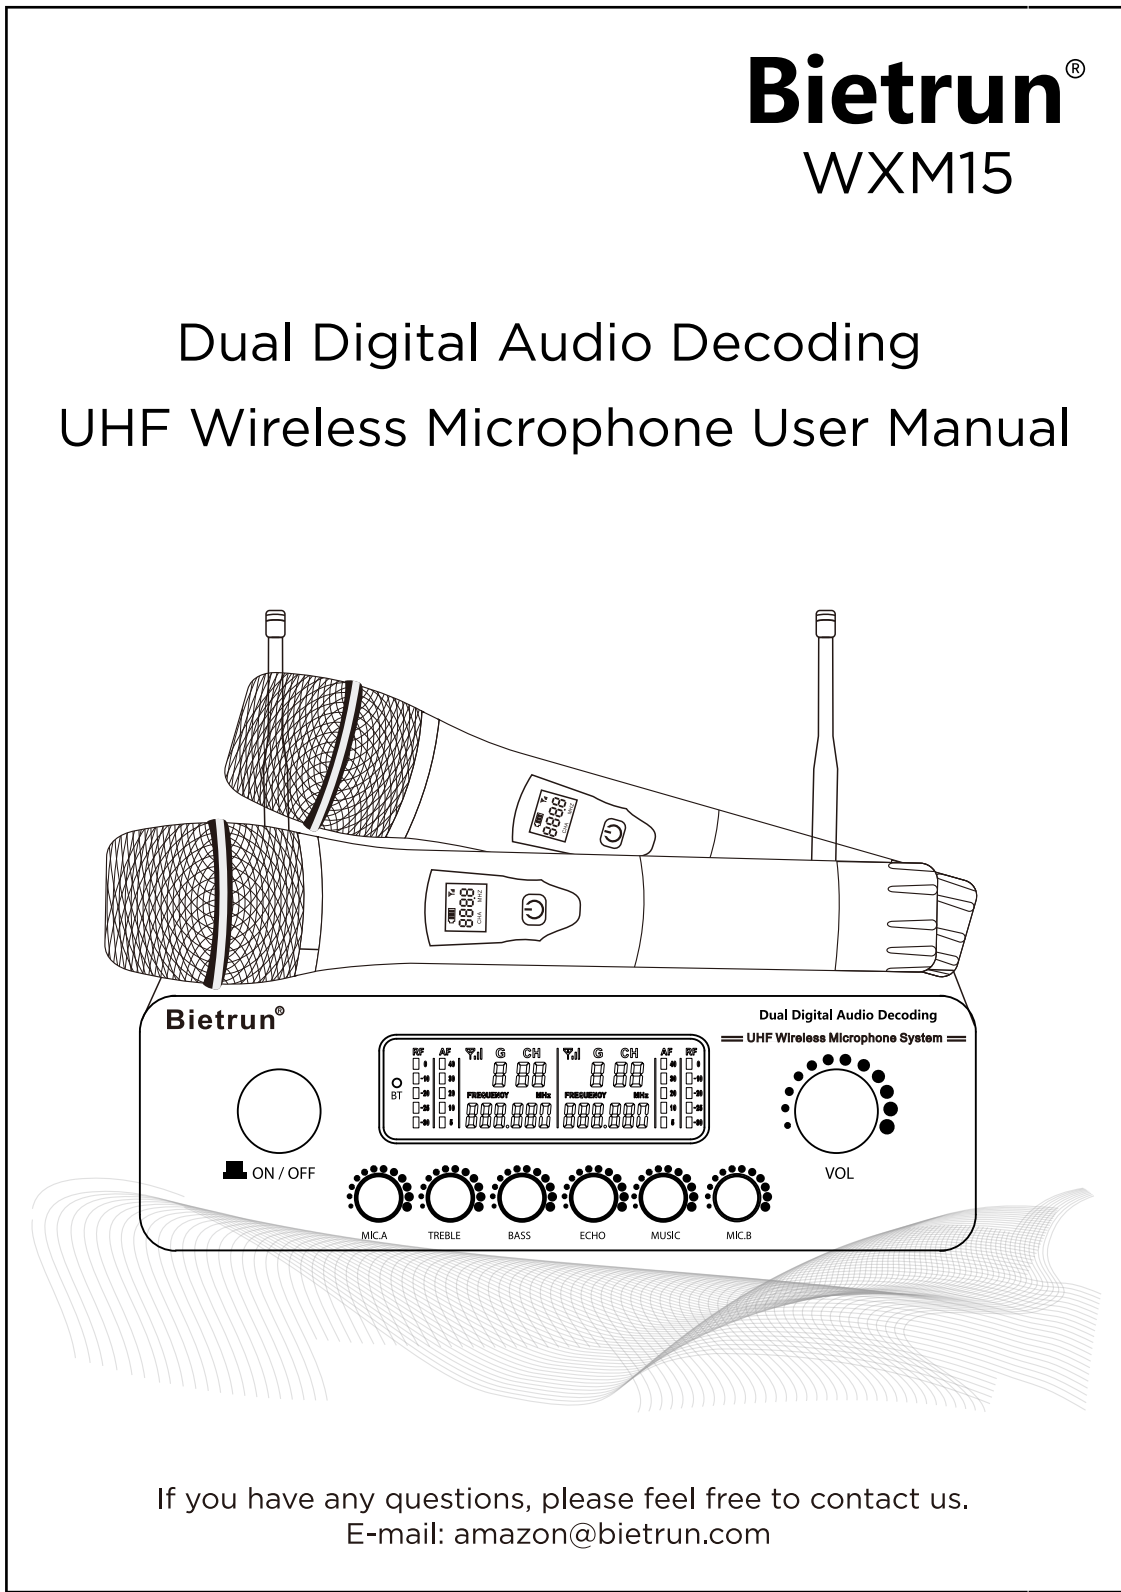


封面

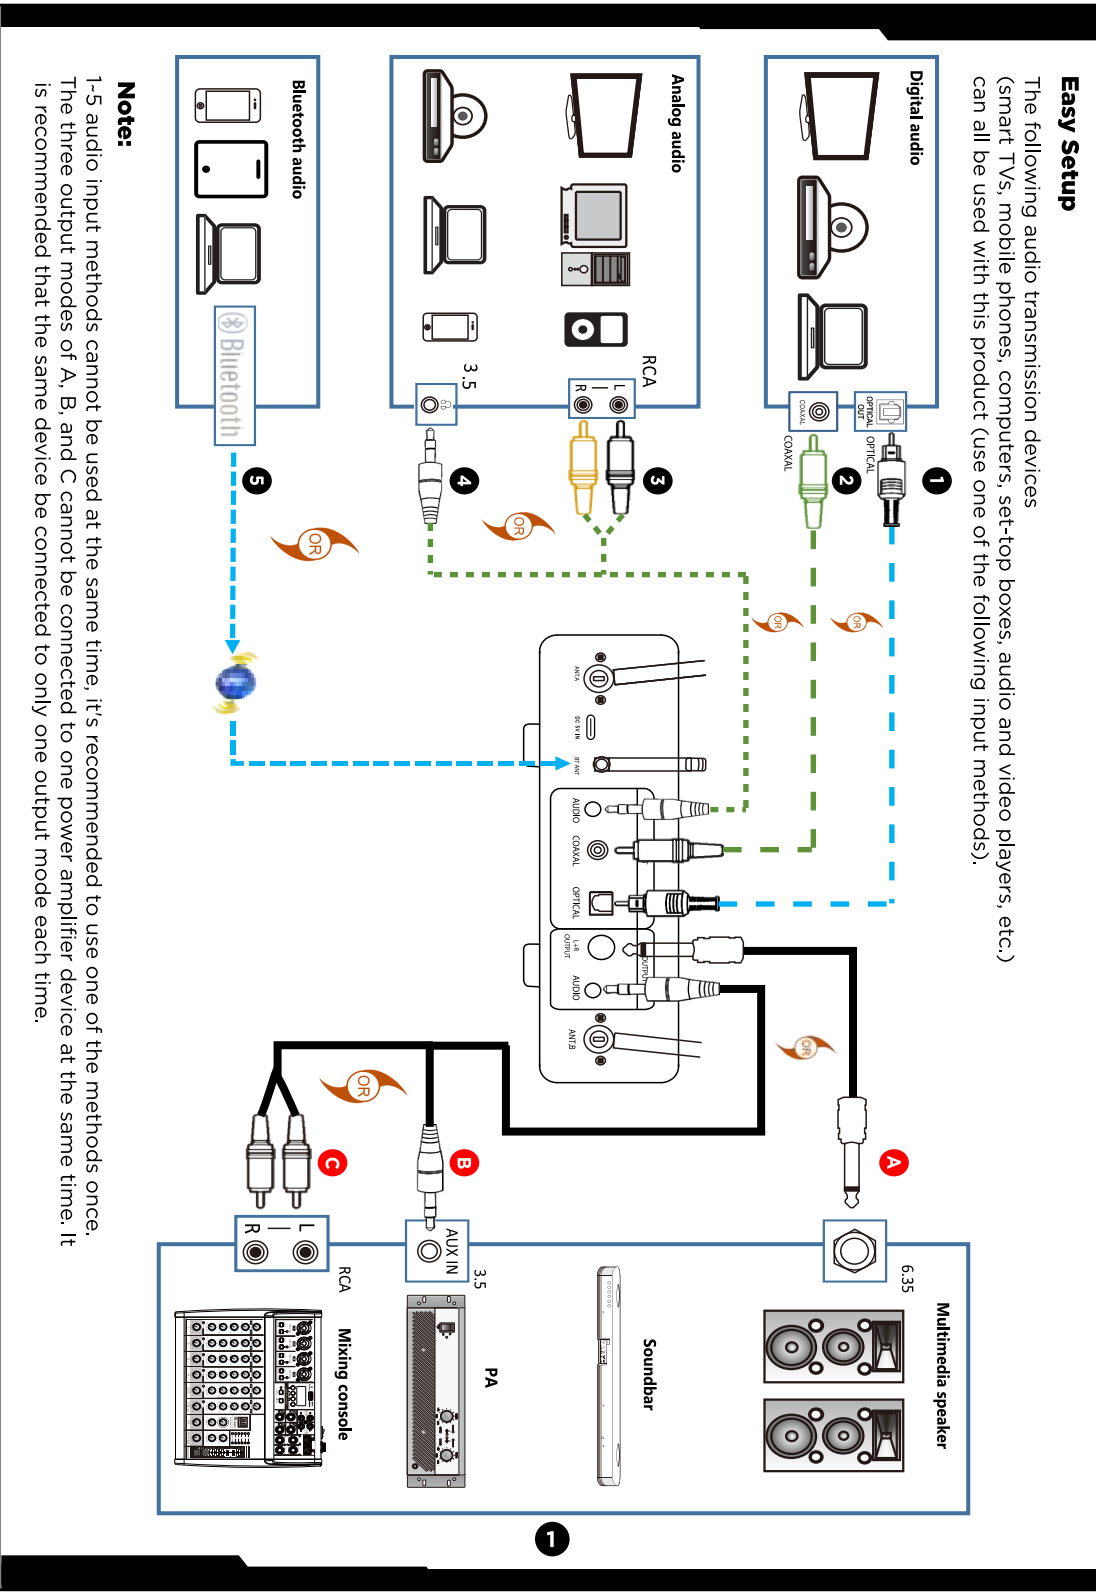


Function and Operation

1. Microphone

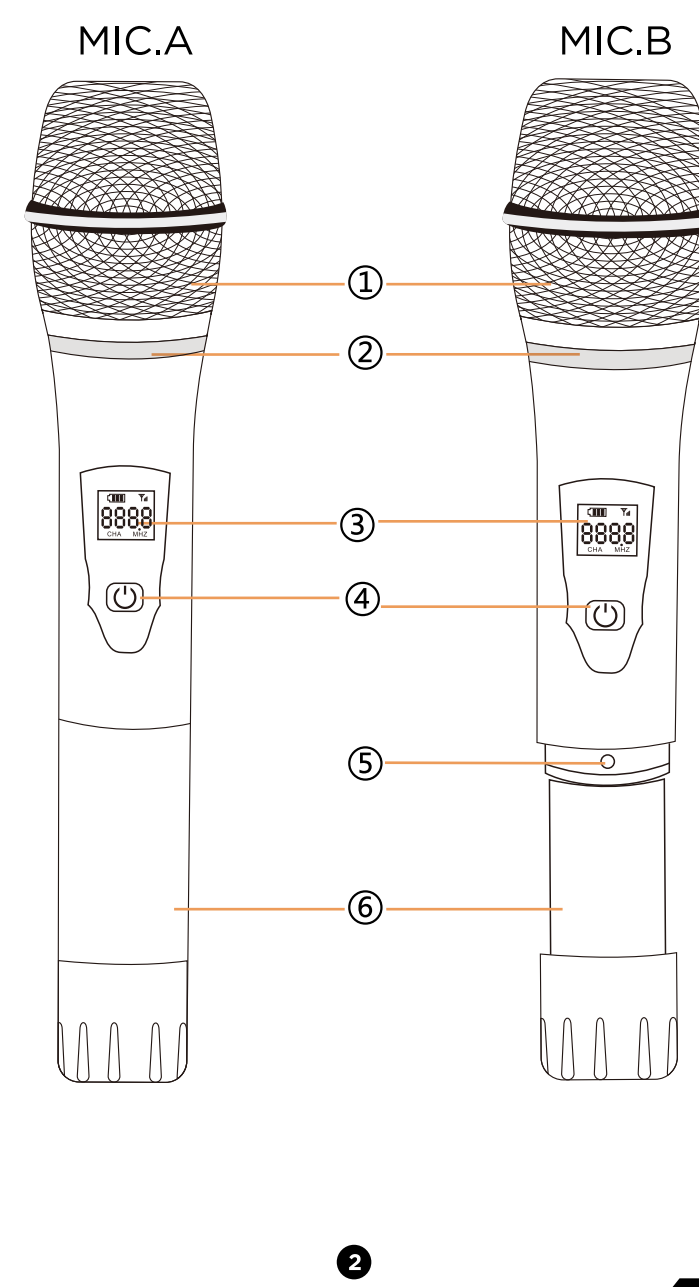


Serial NO.	Part Name	Function description	Notes
1	Mic	Receive sound waves into an electrical signal	
2	Indicator light	1. Green: microphone is on; 2. Red flash: low power; 3. The light is off when the mic is off.	
3	LCD Display Screen	The working status of the microphone: power, signal, frequency, microphone channel.	When the LCD screen changes to red and flashes, it indicates that the power is insufficient and the battery will be shut down soon and a new battery needs to be replaced.
4	Power button	1. Power on/off: Press and hold to turn on, long press to turn off; 2. Volume: Short press to adjust the volume in turn 10 levels, level 1 is the smallest, level 5 is the largest.	
5	Frequency switch	In case of any frequency interference, quickly press the button to change the frequency. There are up to 15 frequencies available.	After switching the channel on the microphone, the frequency of the host will change synchronously.
6	Battery compartment	Put two AA 1.5V alkaline batteries of the same brand into the battery compartment of the microphone, please make sure to observe proper polarity.	1. The old and new batteries cannot be mixed; 2. It is not recommended to use AA alkaline batteries; 3. It is not recommended to use rechargeable batteries (the low voltage of 1.2V affects the working time of the product).

2. Receiver

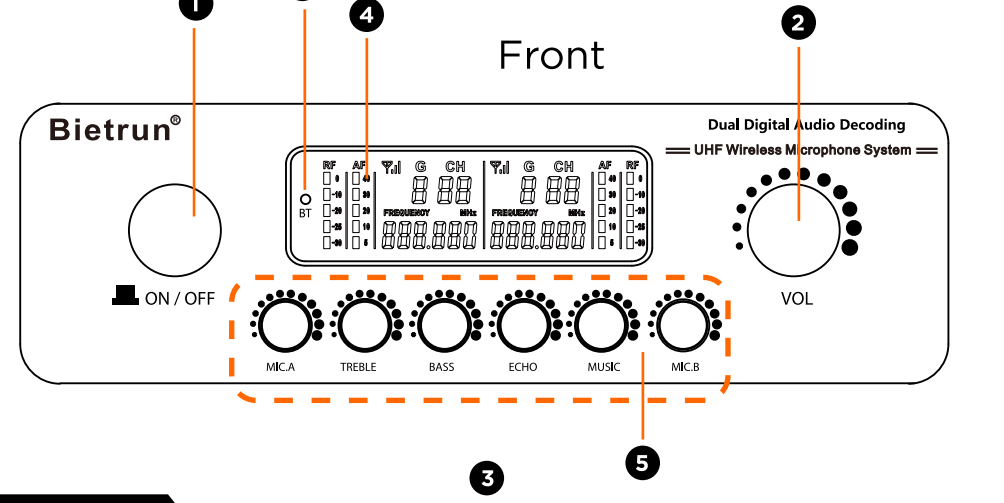

Serial NO.	Part Name	Function description	Notes
1	Power and Bluetooth button	1. Press and hold to turn on, long press to turn off; 2. After power on, short press to turn off the Bluetooth reception, the BT indicator goes off; short press again to turn on the Bluetooth reception, and the BT indicator will light up.	Bluetooth reception is turned on by default every time you turn it on.
2	Total volume control	Control the volume of all audio output, including microphone, Bluetooth, wired output and digital decoding output, with a total of 30 levels.	1. Restore the last volume setting after booting; 2. Due to the difference in signal amplitude between upper and lower input and output devices, better sound effects can be achieved by cooperating with the microphone volume, MUSIC volume and sound effect control of the receiving host.
3	Bluetooth indicator	flashing means Bluetooth is not connected, steady on means connected, and off means Bluetooth reception is off.	Bluetooth is turned on by default every time you turn it on. Short press the power button to turn off or turn on Bluetooth reception.
4	Display	the connection status and signal strength of the two microphones with the host. AF indicates the sound strength of the two microphones, FREQUENCY represents the working frequency of the two microphones and the receiving host.	After switching the channel on the microphone, the frequency of the host will change synchronously.
5	Sound effect control area	MIC A: MIC B: Microphone volume adjustment TREBLE: Microphone treble adjustment BASS: Microphone bass adjustment ECHO: Microphone reverb adjustment MUSIC: Bluetooth, digital audio source, wired input volume adjustment	It is recommended to use this function during live broadcast, and turn it off in other states. According to different audio sources with the master volume control, better sound effects can be achieved.

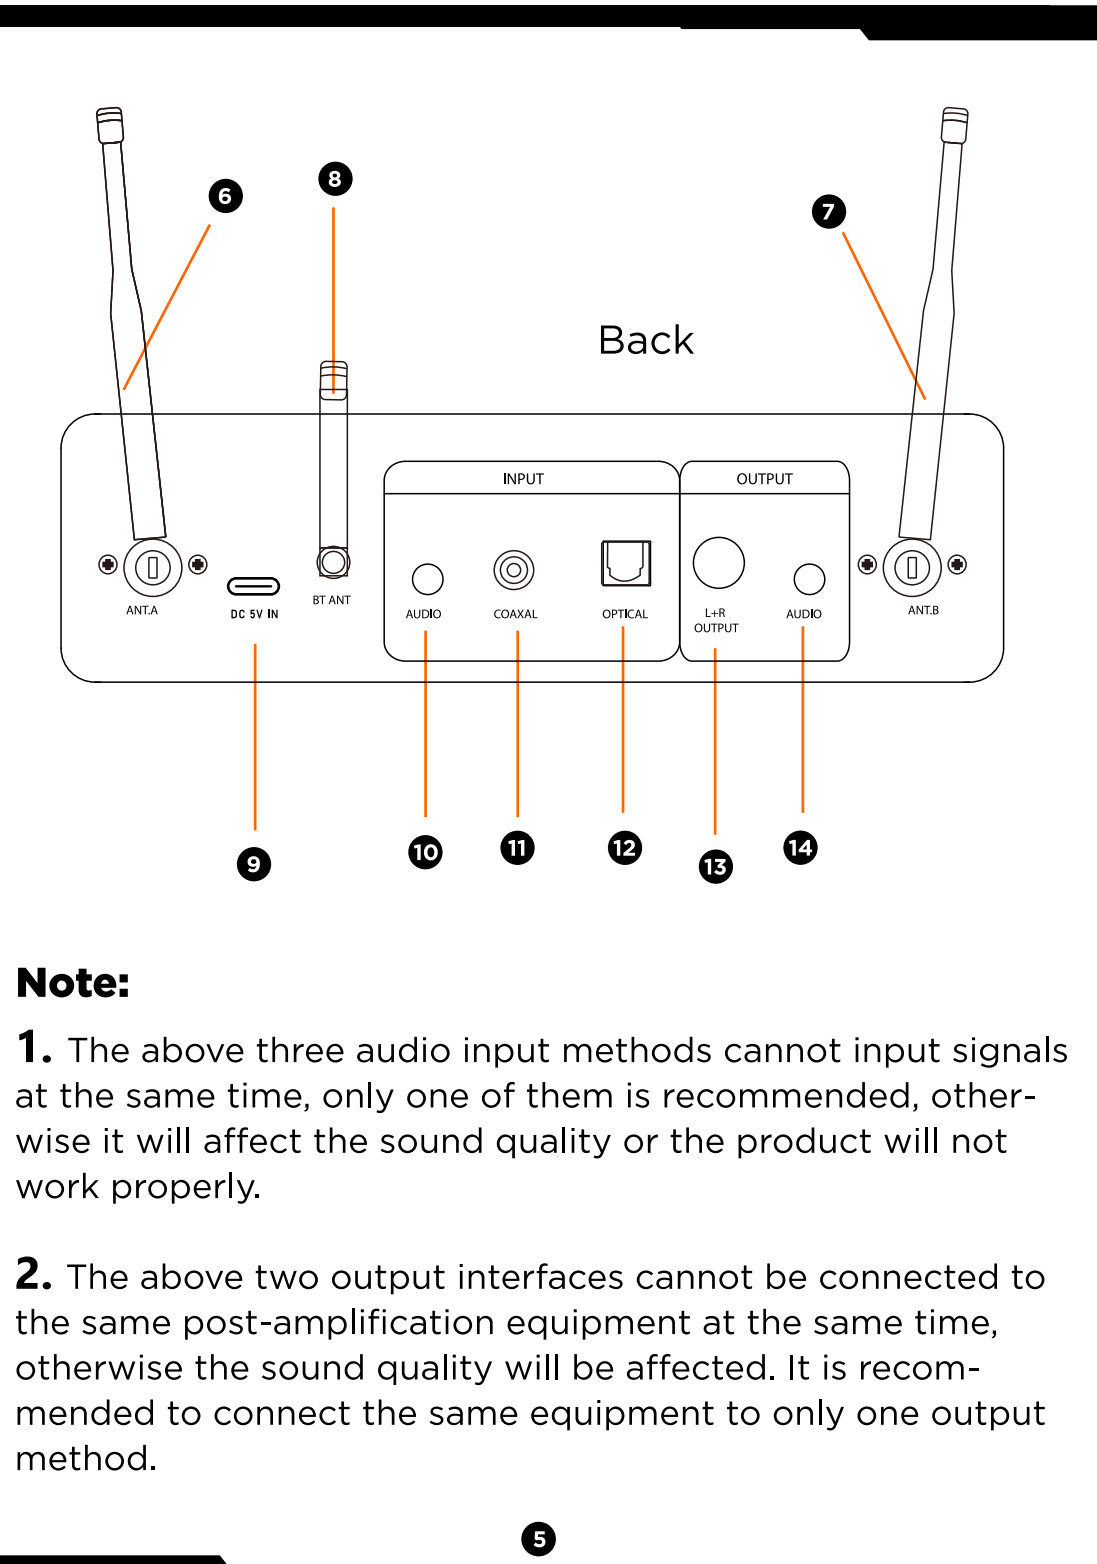

Note:

1. The above three audio input methods cannot input signals at the same time, only one of them is recommended, otherwise it will affect the sound quality or the product will not work properly.
2. The above two output interfaces cannot be connected to the same post-amplification equipment at the same time, otherwise the sound quality will be affected. It is recommended to connect the same equipment to only one output method.

Serial NO.	Part Name	Function description	Notes
7	A, B microphone receiving antenna	The receiving antenna of the microphone, the antenna needs to be assembled for the first use.	1. If the antenna is not installed or the special configuration is not in place, it will affect the distance of the microphone; 2. Do not place large metal objects around the antenna to avoid blocking the reception of the microphone; 3. The antenna angle can be adjusted when the signal is poor.
8	Bluetooth receiving antenna	The Bluetooth receiving antenna needs to be equipped with the antenna for the first use.	1. If the antenna is not installed or is not specially equipped, it will affect the Bluetooth receiving distance; 2. Do not place large metal objects around the antenna to avoid blocking the reception of the microphone.
9	Power supply interface	DC 5V 1000mA. Receive the host power supply port, DC 5V 1000mA.	It is recommended to use the standard adapter. The third-party adapter may affect the product function and sound quality.
10	3.5 signal input port	wired analog audio signal input	can be used by superior equipment with analog signal output (with standard signal cable).
11	Coaxial digital audio input port	Digital audio signal input	All superior equipment with optical digital audio output can be used (with standard optical fiber signal line).
12	Optical digital audio input port	Optical digital audio input	All superior equipment with coaxial digital audio output can be used (with standard coaxial signal cable).
13	6.35 signal output	6.35mm audio output hole, this hole is L+R channel mixed output.	If connected to the MIC port of the downstream device, the main volume of the host should be turned down, otherwise it may cause speaker sound distortion. The MIC volume of high-level equipment controls the sound level.
14	3.5 signal output	3.5mm stereo audio signal output hole.	

Troubleshooting

Serial NO.	Breakdown	Elimination
1	NO sound	1. Check whether the volume control of the upper device, lower device and Bluetooth device has been turned on; 2. Check whether the signal input and output wiring method is correct according to the above quick use guide; 3. The sound source output mode of some devices at the previous level of the receiving host may need to be set, such as TV, DVD, etc. The setting method needs to refer to the operating instructions of these devices; 4. Some amplifiers at the next level of the host may need to set the signal input mode, please refer to the manual of the amplifier for setting; 5. When the Bluetooth is silent, check whether the Bluetooth device is connected to the receiving host and whether the volume of the Bluetooth device is turned on.
2	Receiver can not turn on	Check whether the power adapter, wire and host are connected correctly and firmly, and whether the plug is inserted in place.
3	The music sound cannot be adjusted	1. Adjust the MUSIC button to the middle or right position, and adjust the total volume control; 2. Check whether the input and output interfaces of 3.5 and 6.35 are inserted in place.
4	The sound of microphones is low	Adjust the volume control of MIC A or MIC B to a moderate position.
5	The sound of the microphone is intermittent	1. Shorten the distance between the microphone and the receiving host, and there should be no obstacles between the microphone and the host; 2. Adjust the direction of the receiving antenna, and there should be no large metal close to the antenna, so as not to affect the antenna receiving effect; 3. There may be wireless interference in the use environment. Disassemble the battery and change the frequency. Short press the frequency switch to switch the frequency and use the frequency without interference.
6	The distance of the microphone is too close	1. Check whether the receiving antenna is in place; 2. Adjust the direction of the receiving antenna, and there should be no large metal close to the antenna, so as not to affect the antenna receiving effect.
7	The Bluetooth receiving distance is short or the Bluetooth signal is intermittent	1. Check whether the Bluetooth antenna is properly assembled; 2. Do not place the receiving host with the wireless router, otherwise it will affect the Bluetooth receiving effect; 3. Adjust the direction of the Bluetooth receiving antenna. There should be no large metal close to the antenna, so as not to affect the Bluetooth receiving effect.
8	Howling and screaming from the horn	Reduce the volume of the loudspeaker equipment or microphone. Do not place the microphone too close to the speaker.
9	The microphone cannot be turned on	1. Check whether the polarity of the battery is installed correctly, or replace with a new battery; 2. Long press the power switch for 1 second to turn on, and short press can not turn on.
10	Crash and inoperability	In extreme cases, the system may crash and cannot be operated. You can remove the power plug and reinsert it or remove the battery to reinstall, and then restart.

Technical parameters

(Receiver)

Receiving frequency: U Band
Interference frequency ratio > 95dB
Audio output: 80mV (Max)
Receive channel: 2
Supply Voltage: 5V
Power consumption: 3W

(Handheld Transmitter)

Carrier frequency: U Band
Transmit power: 11.319 dB
Harmonic: <Main wave 40dB
Pickup: 6000single directivity
Antenna: built-in

(Complex Index)

Dynamic Range: >95dB
Frequency response: 50Hz-18KHz
System distortion(<1%, 1K Hertz modulation)

Packing list

- 2* Microphone (A, B)
- 1* Receiver
- 1* Bluetooth antenna
- 2* Microphone antenna
- 1* 6.35mm to 3.5mm cable
- 1* 3.5mm to RCA cable
- 1* Optical cable
- 1* Coaxial cable
- 1* Charging cable
- 1* Power adapter
- 2* Anti-skid ring
- 1* User manual

Manufacturer:
SHENZHEN LONGXIANG INTELLIGENT TECHNOLOGY CO., LTD.
Address: FLOOR 4, BUILDING D, FUXINLIN INDUSTRIAL AREA,
HANGCHENG INDUSTRIAL ZONE FUHUA COMMUNITY
XIXIANG STREET, BAOJIAN DISTRICT SHENZHEN
GUANGDONG CHINA

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.
Specific Absorption Rate (SAR) information:
This SHENZHEN JINGDU TECHNOLOGY CO.,LTD meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies.
The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement the SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: SHENZHEN JINGDU TECHNOLOGY CO.,LTD has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Wireless Microphone kept 0mm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the Wireless Microphone. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.