

[Manuals.plus](#) /

› [Kingston Brass](#) /

› Kingston Brass KS2982BPL Bel-Air Widespread Bathroom Faucet with Pop-Up, Polished Brass Instruction Manual

Kingston Brass KS2982BPL

Kingston Brass KS2982BPL Bel-Air Widespread Bathroom Faucet with Pop-Up, Polished Brass Instruction Manual

PRODUCT OVERVIEW

The Kingston Brass KS2982BPL Bel-Air Widespread Bathroom Faucet is a high-quality fixture designed for durability and aesthetic appeal. Constructed from solid brass and featuring a polished brass finish, this faucet is built to resist corrosion and tarnishing. It includes a drip-free ceramic disc cartridge for reliable performance and dual lever handles that are ADA compliant.

Key features include:

- Solid brass construction for durability.
- Drip-free ceramic disc cartridge for reliable operation.
- Designed for deck-mount, 3-hole installation with an 8 to 16-inch widespread configuration.
- Water flow rate of 1.2 GPM (4.5 LPM) at 60 PSI.
- Spout clearance of 6-11/16 inches and a spout reach of 6-5/16 inches.
- Includes a matching pop-up drain.
- Dual lever handles for hot and cold water control, compliant with ADA guidelines.
- Corrosion-resistant polished brass finish.



Image: The Kingston Brass KS2982BPL Bel-Air Widespread Bathroom Faucet installed on a marble countertop, showcasing its polished brass finish and dual lever handles.

SETUP AND INSTALLATION

This section provides general guidelines for installing your Kingston Brass KS2982BPL faucet. For detailed, step-by-step instructions and specific diagrams, please refer to the included installation manual and technical drawings.

Required Tools and Materials (Not Included):

- Adjustable wrench
- Plumber's putty or silicone sealant
- Phillips head screwdriver
- Basin wrench (optional, for tight spaces)
- Safety glasses
- Flashlight

Pre-Installation Steps:

1. **Turn off Water Supply:** Locate the main water supply valve to your bathroom and turn it off. Open the existing faucet to drain any remaining water from the lines.
2. **Remove Old Faucet:** Disconnect the water supply lines from the old faucet and remove the mounting nuts. Lift the old faucet from the sink.
3. **Clean Mounting Surface:** Thoroughly clean the sink surface where the new faucet will be installed.

Faucet Installation:

1. **Install Handles:** Insert the hot and cold water handles into the outer holes of your 3-hole widespread sink. Secure them from underneath the sink using the provided washers and mounting nuts. Ensure the handles are oriented

correctly (Hot on left, Cold on right).

2. **Install Spout:** Place the faucet spout into the center hole. Apply a thin bead of plumber's putty or silicone sealant around the base of the spout to create a watertight seal. Secure the spout from underneath with its mounting hardware.
3. **Connect Water Supply Lines:** Attach the hot and cold water supply lines to the corresponding handle valves. Connect the other ends of the supply lines to your home's water supply. Hand-tighten first, then use an adjustable wrench for a snug fit, being careful not to overtighten.
4. **Install Pop-Up Drain:** Follow the instructions provided with the pop-up drain assembly to install it into the sink drain opening. Ensure all seals are properly seated to prevent leaks.
5. **Test for Leaks:** Slowly turn on the main water supply. Check all connections for leaks. If leaks are detected, tighten the connections as necessary.

KS2980,1,2,3,5,6,7,8BPL

Widespread Lavatory Faucet With Brass Pop-Up

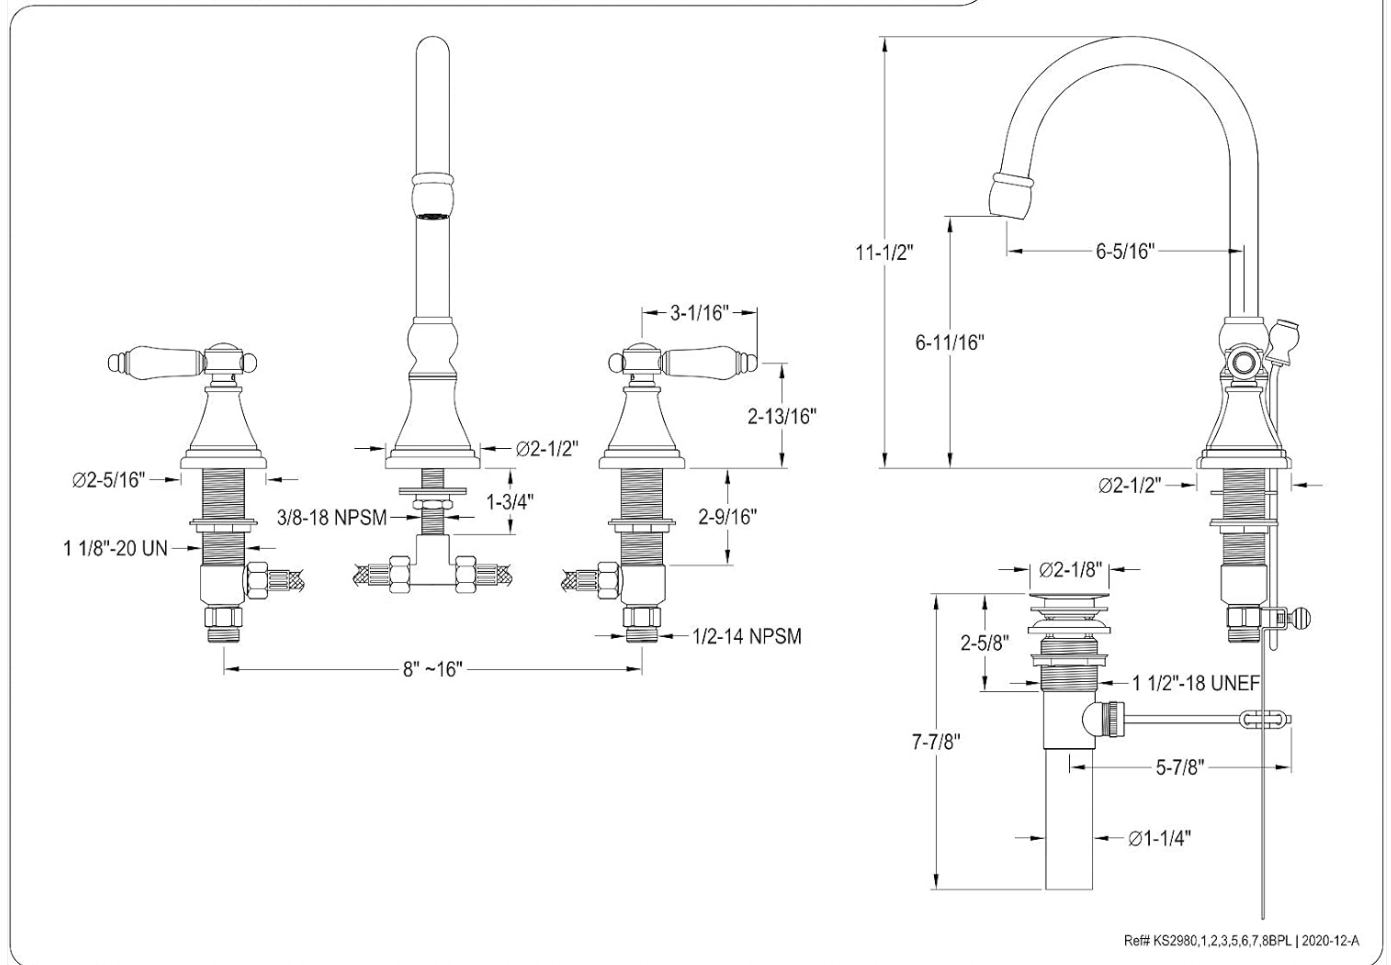


Image: Technical diagram illustrating the dimensions and installation requirements for the Kingston Brass Widespread Lavatory Faucet series, including the KS2982BPL model. This diagram shows the spout height, reach, handle spacing, and connection types.

OPERATING INSTRUCTIONS

The Kingston Brass KS2982BPL faucet features dual lever handles for precise control over water temperature and flow.

- **Cold Water:** To activate cold water, turn the right handle counter-clockwise.
- **Hot Water:** To activate hot water, turn the left handle counter-clockwise.
- **Mixing Water:** Adjust both handles to achieve the desired water temperature and flow rate.
- **Shutting Off Water:** Turn both handles clockwise until the water flow stops completely.



Image: Close-up view of the "HOT" and "COLD" labeled porcelain lever handles, demonstrating their design and function for water temperature control.

MAINTENANCE

Proper maintenance will ensure the longevity and appearance of your Kingston Brass faucet.

- **Cleaning the Finish:** Clean the polished brass finish regularly with a soft, damp cloth. Avoid abrasive cleaners, harsh chemicals, or polishes that contain alcohol, ammonia, or bleach, as these can damage the finish.
- **Aerator Maintenance:** If water flow decreases or becomes irregular, the aerator at the tip of the spout may be clogged. Unscrew the aerator, rinse it under running water to remove debris, and reattach it.
- **Ceramic Disc Cartridges:** The faucet is equipped with drip-free ceramic disc cartridges, which typically require minimal maintenance. If a leak occurs from the handles, the cartridge may need to be replaced. Consult a professional plumber if you are unsure.

TROUBLESHOOTING

Refer to the following common issues and their solutions before contacting customer support.

Problem	Possible Cause	Solution
Low Water Flow	Clogged aerator, partially closed shut-off valve, or debris in water lines.	Clean the aerator. Ensure shut-off valves are fully open. Flush water lines if necessary.
Faucet Leaks from Spout	Damaged ceramic disc cartridge.	Replace the ceramic disc cartridge.

Problem	Possible Cause	Solution
Leaks Around Handle Base	Loose mounting nut or worn O-rings/seals.	Tighten mounting nut. Inspect and replace O-rings/seals if damaged.
Water Temperature Issues	Incorrect hot/cold supply line connection or water heater issues.	Verify hot and cold lines are connected correctly. Check water heater settings.

SPECIFICATIONS

Feature	Detail
Brand	Kingston Brass
Model Number	KS2982BPL
UPC	663370827730
GTIN	00663370827730
Recommended Use	Bathroom
Mounting Type	Deck Mount, Widespread
Number of Holes	3
Hole Diameter for Mount	8 inches (center-to-center for handles)
Finish Type	Polished Brass
Material	Brass
Included Components	Spout, Mounting Hardware, Pop-Up Drain, Installation Manual
Number of Handles	2 (Lever Handles)
Spout Height	11.5 inches
Spout Reach	6.31 inches
Flow Rate	1.2 GPM / 4.5 LPM at 60 PSI
Valve Type	Ceramic Disc, Widespread
Style Name	Traditional
Spout Design	High Arc

WARRANTY AND SUPPORT

For information regarding product warranty, please refer to the documentation included with your purchase or visit the official Kingston Brass website. For technical assistance or replacement parts, please contact Kingston Brass customer support directly.

Kingston Brass Official Website: www.kingstonbrass.com

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question