



尺寸	70*100MM	工艺	4C印刷过哑胶
材质	80g铜版纸	装订方式	风琴折



21-in-1 Thunderbolt 4/TB4 Docking Station



User Manual

SL-020


Package Contents

- 1*TB4 21-in-1 Multi-function Docking Station
- 1*Thunderbolt 4 Data Cable
- 1*Power 20V/7.5A
- 1*User Manual

Product Introduction

- The Type-C Thunderbolt 4 uplink port supports a transmission rate of 40Gbps, data transmission, video display, and PD fast charging of uplink host devices.
- Supports 8K@60Hz high-definition screen projection, as well as support DisplayLink USB display technology, dual TB4 video output + HDMI+DP+ DisplayLink HDMI+DP (a single monitor supports up to 8K@60Hz, and multiple monitors support up to 4K@60Hz), 6 screens (must be supported by computers and monitors) at the same time, can be the same screen or split screen, wider field of vision, expand the split screen for convenient office, connect to TV projectors/ Office meetings such as monitors are easily displayed and work more efficiently.
- Supports DC power supply input 20V/7A~20V/12A.
- It supports PD3.0 protocol, and supports up to PD 90W for uplink device charging.
- 2*TB4 port, transmission rate 40Gbps, support data transmission, video display, 2 ports are connected at the same time, the efficiency is doubled, and the file transfer is efficient and stable.
- 6*USB3.2 Gen2 ports, 6 ports are connected at the same time, the efficiency is doubled, and the file transfer is efficient and stable.
- 3.5mm audio port, listen to music anytime, anywhere, support stereo sound, support headphones/speakers, etc.

Interface Introduction

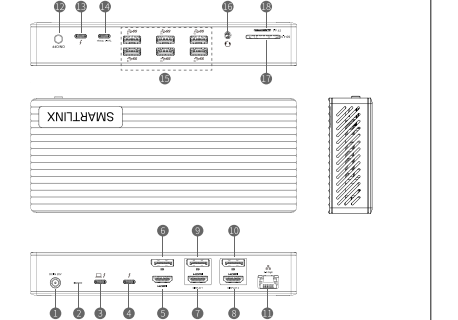


- 2.5G wired network port, smooth movie viewing, fast download, office/download/game unimpeded.
- TF/SD dual card slots, dual card double reading, file reading at will, solves the trouble of notebook card reading without card slot.
- Each function is equipped with an independent chip, which has fast transmission and no jamming, and the multi-function runs smoothly at the same time.
- Aluminum alloy material, fast heat export, no hot use, durable and environmentally friendly, good compatibility.

Specification


Model	SL-020
Material/Color	Aluminum Alloy + ABS Plastic / Iron Gray
Size	190.8*82.6*31MM
Uplink Interface	1*Type-C TB4 the uplink port is connected to the computer device, 1*DC Power input, power supply input, support 20V/7A~20V/12A
Extended Interface	2*Type-C TB4 Downstream port 3*HDMI video output port 3*DP video output port 1*RJ45 2.5G Ethernet port 1*3.5mm Audio port 1*SD card slot port 1*TF card slot port
Systems	Mac OS 10.2 and future releases, Windows 7/10/11 32 and 64 bit and future releases, Linux

How to Connect

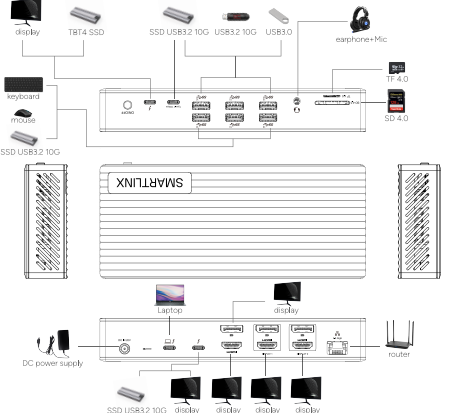


- The computer first installs the DisplayLink video driver.
- DC power supply input port, connected to 20V power supply.
- The Type-C Thunderbolt 4 uplink port is connected to a computer with a male cable.
- Tap the power button to turn on the power.
- Each downstream port can be connected to the corresponding device according to your needs (note: two video ports in the same set of Display cannot be used at the same time).

There are four ways to properly connect a DisplayLink display. Two video ports in the same group cannot be used at the same time.

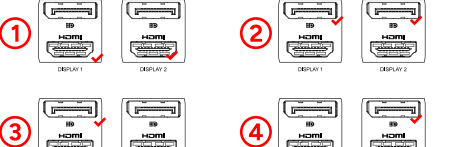


Directions for use

- First install the DisplayLink video driver, installation steps:
 - Search the web for DisplayLink.
 - Go to the official website and click "Downloads" to enter.

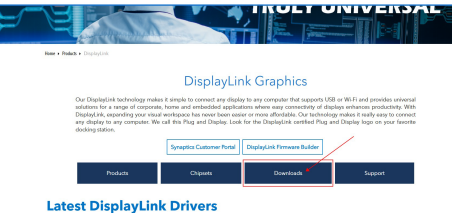

Latest DisplayLink Drivers

Supported Operating Systems



- Depending on your operating system, choose the one that suits you and click to enter.
- Select the version that suits your computer system and click "Download" to enter.

DisplayLink Manager Graphics Connectivity (1.10)

Please read and accept the following Software License Agreement:

BY DOWNLOADING, INSTALLING OR USING THIS SOFTWARE AND ANY ASSOCIATED MATERIALS COLLECTIVELY "THE SOFTWARE", YOU AGREE TO BE BOUND BY THE TERMS OF THIS END USER LICENSE AGREEMENT ("EULA") IF YOU DO NOT AGREE TO THE TERMS OF THIS EULA YOU MAY NOT INSTALL OR USE THE SOFTWARE.

1. LICENSE

a. This Software is licensed to DisplayLink Group ("DisplayLink") on a non-exclusive, non-transferable basis for use only in conjunction with products which contain DisplayLink technology. Use of the Software after this date is incompatible with products which contain DisplayLink technology. It is not

Accept Continue

- Click "Accept" at the bottom left, and you will be prompted with the download progress.

Install DisplayLink Manager

Welcome to the DisplayLink Manager Installer

You will be guided through the steps necessary to install this software.

This will take 171 MB of space on your computer.

Click Install to perform a standard installation of this software on the disk "Macintosh HD".

Go Back Install

- Click Continue.

Standard Install on "Macintosh HD"

This will take 171 MB of space on your computer.

Click Install to perform a standard installation of this software on the disk "Macintosh HD".

Go Back Install

- Click Install to start the installation.

Are you sure you want to quit?

You will have to re-open the application to use your DisplayLink device

Quit Cancel

- Click Cancel to complete the installation, and you can use it.

DisplayLink Manager Graphics Connectivity (1.10) - EULA

Available to download and install

Automatic app startup: Launch automatically after login

Additional HiDPI modes: Enable experimental 300% and 350% modes

Apple Watch unlock: Use Apple Watch to unlock on login screen

Face app support (Beta): Allow Face to wake colours at night

System sleep in display-closed mode: Power save all displays and sleep in clamshell

Display rotation and toggle: No DisplayLink-enabled display detected

Please allow your DisplayLink device to connect to this Mac

After connecting accessories to this Mac via USB, a system prompt will appear. Please click "Allow" to ensure the device is working properly.

Quit

- Hit "✓" in front of the required computer permissions (note: the computer and system versions are different, the screen and options shown in the figure below will be different), and click Quit.

DisplayLink Manager Graphics Connectivity (1.10) - EULA

The installation was completed successfully.

The software was installed.

Go Back Close

- Once the installation is complete, click Close.

DisplayLink Manager Graphics Connectivity (1.10) - EULA

Please allow your DisplayLink device to connect to this Mac

After connecting accessories to this Mac via USB, a system prompt will appear. Please click "Allow" to ensure the device is working properly.

Quit

- When this logo is displayed, the installation is complete.

Safety Precautions

- This product is only supported on Thunderbolt 4 computers or USB-C DP Alt Mode computers and mobile phones.
- When using, make sure that the PIN needle in the product does not sink or bend, so as not to affect the plugging and unplugging.
- Be careful not to splash liquid into the connector when using, so as not to affect its performance.
- The product should be placed in a dry place, not in a humid environment.
- At least 10 seconds between hot-swap intervals of the product connector interface (Applicable to all products).

70*100MM