



尺寸	70*100MM	工艺	4C印刷过哑胶
材质	80g铜版纸	装订方式	风琴折



21-in-1  
Thunderbolt 4/TB4 Docking Station



User Manual


SL-020

**Package Contents**

- 1\*TB4 21-in-1 Multi-function Docking Station
- 1\*Thunderbolt 4 Data Cable
- 1\*Power 20V/7.5A
- 1\*User Manual

**Product Introduction**


- The Type-C Thunderbolt 4 uplink port supports a transmission rate of 40Gbps, data transmission, video display, and PD fast charging of uplink host devices.
- Supports 8K@60Hz high-definition screen projection, as well as support DisplayLink USB display technology, dual TB4 video output + HDMI+DP+ DisplayLink HDMI+DP (a single monitor supports up to 8K@60Hz, and multiple monitors support up to 4K@60Hz), 6 screens (must be supported by computers and monitors) at the same time, can be the same screen or split screen, wider field of vision, expand the split screen for convenient office, connect to TV projectors/ Office meetings such as monitors are easily displayed and work more efficiently.
- Supports DC power supply input 20V/7A~20V/12A.
- It supports PD3.0 protocol, and supports up to PD 90W for uplink device charging.
- 2\*TB4 port, transmission rate 40Gbps, support data transmission, video display, 2 ports are connected at the same time, the efficiency is doubled, and the file transfer is efficient and stable.
- 6\*USB3.2 Gen2 ports, 6 ports are connected at the same time, the efficiency is doubled, and the file transfer is efficient and stable.
- 3.5mm audio port, listen to music anytime, anywhere, support stereo sound, support headphones/speakers, etc.

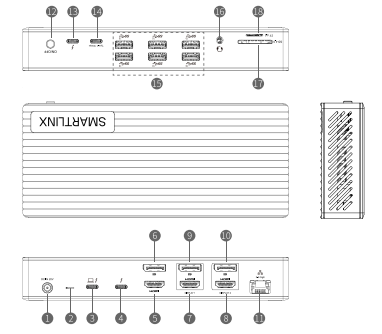**Interface Introduction**


- 2.5G wired network port, smooth movie viewing, fast download, office/download/game unimpeded.
- TF/SD dual card slots, dual card double reading, file reading at will, solves the trouble of notebook card reading without card slot.
- Each function is equipped with an independent chip, which has fast transmission and no jamming, and the multi-function runs smoothly at the same time.
- Aluminum alloy material, fast heat export, no hot use, durable and environmentally friendly, good compatibility.

**Specification**


Model	SL-020
Material/Color	Aluminum Alloy + ABS Plastic / Iron Gray
Size	190.8*82.6*31MM
Uplink Interface	1*Type-C TB4 the uplink port is connected to the computer device. 1*DC Power input, power supply input, support 20V/7A~20V/12A
Extended Interface	2*Type-C TB4 Downstream port 3*HDMI video output port 3*DP video output port 1*RJ45 2.5G Ethernet port 1*Type-C USB3.2 Gen2 Downstream port 6*USB3.2 Gen2-A Downstream port 1*3.5mm Audio port 1*SD card slot port 1*TF card slot port
Systems	Mac OS 10.2 and future releases. Windows 7/10/11 32 and 64 bit and future releases, Linux

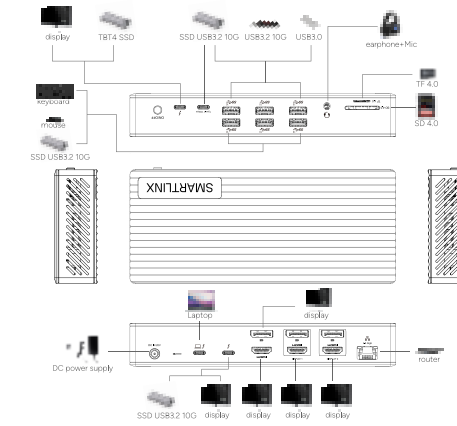

**How to Connect**

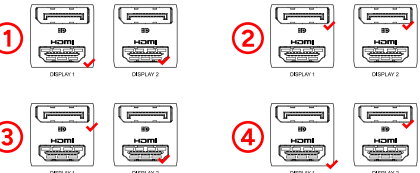

- 1. The computer first installs the DisplayLink video driver.
- 2. DC power supply input port, connected to 20V power supply.
- 3. The Type-C Thunderbolt 4 uplink port is connected to a computer with a male cable.
- 4. Tap the power button to turn on the power.
- 5. Each downstream port can be connected to the corresponding device according to your needs (note: two video ports in the same set of Display cannot be used at the same time).



**There are four ways to properly connect a DisplayLink display. Two video ports in the same group cannot be used at the same time.****Directions for use**



1. First install the DisplayLink video driver, installation steps:
  - ① Search the web for DisplayLink.
  - ② Go to the official website and click "Downloads" to enter.


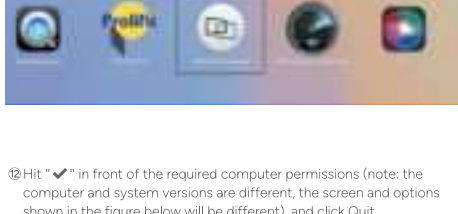


















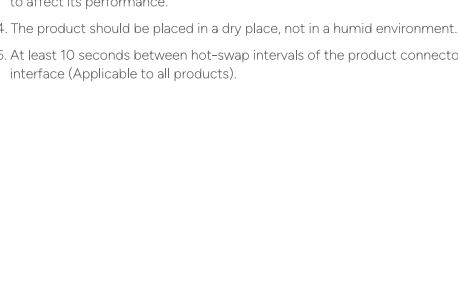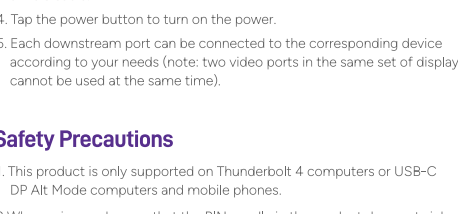

③ Depending on your operating system, choose the one that suits you and click to enter.

④ Select the version that suits your computer system and click "Download" to enter.

⑤ Click "Accept" at the bottom left, and you will be prompted with the download progress.

⑥ Once the download is complete, click on the computer download option: click on the Displaylink installation package.

⑦ Click Continue.

⑧ Click Agree.

⑨ Click Install to start the installation.

⑩ Once the installation is complete, click Close.

⑪ Go to the console and click to go to Displaylink manager.

⑫ Hit "✓" in front of the required computer permissions (note: the computer and system versions are different, the screen and options shown in the figure below will be different), and click Quit.

⑬ Click Cancel to complete the installation, and you can use it.

⑭ When this logo is displayed, the installation is complete.

2. DC power supply input port, connected to 20V power supply.

3. The Type-C Thunderbolt 4 uplink port is connected to a computer with a male cable.

4. Tap the power button to turn on the power.

5. Each downstream port can be connected to the corresponding device according to your needs (note: two video ports in the same set of display cannot be used at the same time).

**Safety Precautions**

1. This product is only supported on Thunderbolt 4 computers or USB-C DP Alt Mode computers and mobile phones.
2. When using, make sure that the PIN needle in the product does not sink or bend, so as not to affect the plugging and unplugging.
3. Be careful not to splash liquid into the connector when using, so as not to affect its performance.
4. The product should be placed in a dry place, not in a humid environment.
5. At least 10 seconds between hot-swap intervals of the product connector interface (Applicable to all products).

70\*100MM