

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

> [Cruz](#) /

> [Cruz Kit Optiplus H. Accord \(VIII\) Sedan 4d \(08-15\) Instruction Manual](#)

Cruz 935-695

Cruz Kit Optiplus H. Accord (VIII) Sedan 4d (08-15) Instruction Manual

Model: 935-695

1. INTRODUCTION

This instruction manual provides essential information for the proper installation, operation, and maintenance of your Cruz Kit Optiplus, specifically designed for the Honda Accord VIII Sedan 4-door models manufactured between 2008 and 2015. Please read this manual thoroughly before attempting installation or use to ensure safety and optimal performance of the product.

2. SAFETY INFORMATION

- Always follow the installation instructions precisely. Incorrect installation can lead to product failure and potential damage to your vehicle or other property.
- Ensure all components are securely fastened before driving. Regularly check the tightness of all bolts and connections, especially after the first few kilometers of driving and periodically thereafter.
- Do not exceed the maximum load capacity specified for your vehicle's roof or the Cruz roof bars (sold separately). Refer to your vehicle's owner's manual for specific roof load limits.
- Distribute the load evenly on the roof bars. Avoid placing heavy items on one side.
- Driving with roof bars and loads can affect vehicle handling, braking, and fuel consumption. Adjust your driving style accordingly, especially in strong winds or when cornering.
- Be aware of increased vehicle height when entering garages, car washes, or low-clearance areas.
- Remove the roof bars and fitting kit when not in use to reduce wind noise and improve fuel efficiency.

3. PRODUCT OVERVIEW

The Cruz Kit Optiplus (Model 935-695) is a vehicle-specific fitting kit designed to integrate Cruz roof bars (not included) onto the roof of a Honda Accord VIII Sedan 4-door (2008-2015). This kit provides the necessary components to securely attach the roof bars to your vehicle's designated mounting points, ensuring a stable and safe platform for transporting various loads.



Image 1: Product packaging box with Cruz logo. This box contains the fitting kit components.

4. SETUP AND INSTALLATION

The installation process requires careful attention to detail. It is recommended to perform the installation with two people.

4.1. Unpacking and Component Check

1. Carefully open the packaging and remove all components.
2. Verify that all parts listed in the included parts diagram (refer to the separate diagram provided with the physical product) are present and undamaged.
3. Familiarize yourself with the specific components of the fitting kit, which typically include vehicle-specific brackets, rubber pads, and fasteners.



Image 2: Side view of the product packaging box. Ensure all contents are present before proceeding.

4.2. Pre-Installation Steps

- Clean the vehicle's roof surface where the fitting kit will be attached. Ensure it is free from dirt, dust, and debris.
- Identify the designated mounting points on your Honda Accord VIII Sedan. These are usually located under the door frames or in specific roof channels.

4.3. Attaching the Fitting Kit to Roof Bars

Follow the specific instructions provided with your Cruz roof bars to attach the Optiplus fitting kit components to the roof bars. This typically involves sliding brackets into the bar channels and securing them with bolts.

4.4. Mounting the Assembly to the Vehicle

1. Carefully place the assembled roof bars with the fitting kit onto the vehicle's roof, aligning the vehicle-specific brackets with the designated mounting points.
2. Ensure the rubber pads are correctly positioned between the brackets and the vehicle's paintwork to prevent scratches and provide a secure grip.
3. Using the provided tools and fasteners, tighten the brackets according to the torque specifications in the detailed instruction sheet (included with the physical product). Tighten gradually and evenly on both sides to ensure balanced pressure.
4. Once tightened, gently pull and push on the roof bars to confirm they are securely attached and do not move.



Image 3: Another view of the product packaging box. Refer to the specific instructions inside for detailed installation steps.

5. OPERATING INSTRUCTIONS

Once the Cruz Kit Optiplus and roof bars are correctly installed, you can begin using them to transport loads.

- **Load Capacity:** Always adhere to the lowest maximum load capacity specified by your vehicle manufacturer, the Cruz roof bars, and any accessories you are using. Never exceed these limits.
- **Load Distribution:** Distribute the weight of your load as evenly as possible across the roof bars. Secure items firmly to prevent shifting during transit.
- **Securing Loads:** Use appropriate straps, nets, or other securing devices to ensure your load is stable and cannot move or detach during travel.
- **Driving Considerations:** Be mindful of the altered center of gravity and increased wind resistance. Drive at reduced speeds, especially in adverse weather conditions or on uneven roads.

6. MAINTENANCE

Regular maintenance will prolong the life of your Cruz Kit Optiplus and ensure continued safe operation.

- **Regular Inspection:** Periodically check all components for signs of wear, damage, or corrosion. Pay close attention to bolts, clamps, and rubber pads.

- **Tightness Check:** Re-tighten all fasteners as necessary, especially after long journeys or if you notice any movement.
- **Cleaning:** Clean the fitting kit and roof bars regularly with mild soap and water. Avoid harsh chemicals or abrasive cleaners that could damage the finish or rubber components.
- **Storage:** When not in use, it is recommended to remove the roof bars and fitting kit and store them in a dry, protected area to prevent unnecessary exposure to weather elements.

7. TROUBLESHOOTING

If you encounter issues with your Cruz Kit Optiplus, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Roof bars feel loose or move	Fasteners are not sufficiently tightened.	Re-tighten all bolts and clamps according to torque specifications. Check rubber pads for proper seating.
Excessive wind noise	Incorrect positioning of roof bars or accessories.	Ensure roof bars are correctly spaced and positioned. Check for any gaps or loose components. Consider using wind fairings if available.
Scratches on vehicle paintwork	Improper installation of rubber pads or debris under pads.	Ensure rubber pads are correctly placed and clean. Always clean the roof surface before installation.

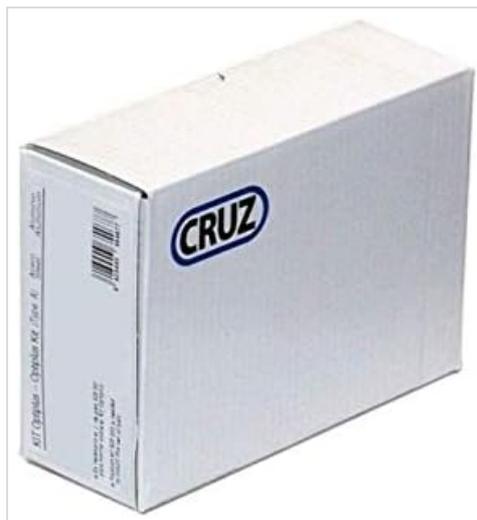


Image 4: Product packaging box with barcode. If issues persist, refer to the manufacturer's contact information on the packaging.

8. SPECIFICATIONS

- **Model Number:** 935-695
- **Compatibility:** Honda Accord VIII Sedan 4-door (Model Years: 2008-2015)
- **Manufacturer:** CRUZDAK
- **Item Weight (Kit Only):** Approximately 500 g
- **Package Dimensions:** 25 x 20 x 10 cm
- **Country of Origin:** Germany

9. WARRANTY AND SUPPORT

This product is covered by the manufacturer's standard warranty. Please retain your proof of purchase for any warranty claims. For technical support, missing parts, or further assistance, please contact your retailer or the manufacturer directly using the contact information provided on the product packaging or their official website.

