


T01

# User Manual



## I. Product Diagram

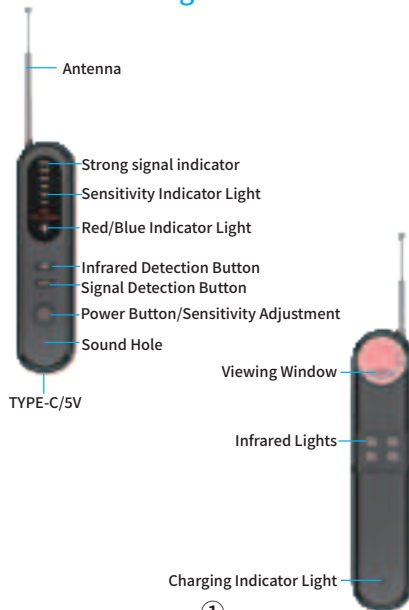

## II. Product Overview

This device combines active infrared scanning and passive wireless scanning to detect various types of cameras, listening devices, and trackers, whether wired or wireless. Its wireless detection range covers devices within the 10 MHz spectrum, effectively protecting against unauthorized surveillance, eavesdropping, and tracking.

## III. Product Precautions

**Turn Off Communication Devices:** Before use, turn off and disconnect any network devices in the area to prevent continuous alarms.

**Switch Detection Modes:** If no camera is detected in wireless mode, switch to infrared detection mode.


**Adjust Sensitivity:** In RF detection mode, press the power button briefly to adjust sensitivity. If the device keeps alarming, lower the sensitivity to reduce the detection range.

## IV. Operating Instructions



### Power On:

Press and hold the power button (⏻) for 3 seconds. A “beep” sound will indicate the device is on, and the signal lights (📶) will light up sequentially before turning off, entering standby mode.

#### Power Off:

Press and hold the power button (  ) for 3 seconds. A “beep” sound indicates the device is off.

#### 2.4G Signal Detection:

- Press the **MODE** button to activate 2.4G frequency detection. The red light (  ) will turn on.
- Adjust sensitivity by pressing the power button (  ) :
  - Higher sensitivity shows more white lights, expanding the detection range.
  - Lower sensitivity is indicated by fewer white lights, narrowing the range to pinpoint the source.
  - The top red light indicates the strongest signal, with faster “beep” sounds as the signal strengthens.


#### Full Spectrum Detection:

- Press the **MODE** button to activate full-spectrum detection (1MHz–6.5GHz). The blue light will turn on.
- Adjust sensitivity in the same way as above.

#### Disable Alarm Sound:

Press and hold the **MODE** button for 5 seconds to disable the “beep” sound. Repeat the same operation to enable it again.

#### Camera Detection Mode:

- Press the (  ) button to activate infrared scanning. Four infrared lights will turn on. For best results, turn off the room lights.

③

b. Bring your eyes close to the viewing window and move the device around to scan the area. Any camera lens will appear as a bright, flashing point. Please check all the flashing points.

c. Press the **MODE** button to adjust the flashing frequency of the infrared lights (6 levels). The flashing infrared light helps to better identify the reflective points of camera lenses.

#### Magnetic Field Detection:

Press the **MODE** button to switch to green light mode. Move the magnetic sensor closer to the source; a stronger magnetic field is indicated by more white

## V. Suitable Applications

- Hotels
- Public entertainment venues
- Fitting rooms
- Individuals handling sensitive or confidential information
- Security personnel for commercial and technical facilities
- Professionals in counter-surveillance and anti-eaves-dropping
- Business meetings
- Inspections in hotel rooms, bathrooms, fitting rooms, public restrooms, entertainment venues, and vehicles

④

## Important Notice

Please strictly comply with local laws when using this product. It is prohibited to use this device for any illegal activities. Users are solely responsible for any misuse or consequences.

⑤