**Saved from manuals.plus.**
**Open the live page for links to other documents and user manuals.**



**VOTON V-1538I**

# VOTON V-1538I Matte Black Single Handle Bathroom Faucet Instruction Manual

Brand: VOTON | Model: V-1538I

## Introduction

Thank you for choosing the VOTON V-1538I Matte Black Single Handle Bathroom Faucet. This manual provides detailed instructions for the safe and proper installation, operation, and maintenance of your new faucet. Please read all instructions carefully before beginning installation and keep this manual for future reference.
This bathroom sink faucet features a durable stainless steel body with a multi-thicken nano electronic plating, ensuring corrosion resistance and easy cleaning. Its high-sealing ceramic cartridge offers drip-free performance, tested for over 500,000 cycles for long-lasting reliability. The matte black finish provides a modern, retro design that is fingerprint-free and scratch-resistant, enhancing your bathroom's aesthetic. The single-lever design allows for easy control of water flow and temperature, making it suitable for various bathroom settings including RVs and powder rooms.

## Safety Information

- Always turn off the main water supply before attempting any installation or maintenance.
- Wear appropriate personal protective equipment, such as safety glasses, during installation.
- If you are unsure about any part of the installation process, consult a qualified professional plumber.
- Do not overtighten connections, as this may cause damage to the faucet or plumbing.
- Ensure all connections are secure to prevent leaks.

## Package Contents

Please verify that all components are present before beginning installation:

- VOTON V-1538I Bathroom Sink Faucet (Matte Black)
- Hot & Cold Water Supply Lines (3/8" threaded)
- Deck Plate (6.49 inch for 1 or 3 hole sinks)
- Mounting Hardware
- Instruction Manual

## SPECIFICATIONS

| Feature | Detail |
|---|---|
| Brand | VOTON |
| Model Name | V-1538I |
| Finish Type | Matte Black |
| Material | Stainless Steel (Body), Brass (Handle) |
| Mounting Type | Deck Mount |
| Number of Handles | 1 |
| Hole Count | 1 (or 3 with deck plate) |
| Spout Height | 3.4 Inches |
| Spout Reach | 4.2 Inches |
| Product Dimensions | 2.36"D x 6.3"W x 6.9"H |
| Item Weight | 1.81 pounds |
| Special Feature | Rust prevention, Easy to clean |
| Recommended Uses | Bathroom, RV vanity sink, Vessel sink |


## Durable Finish Features




*The faucet's durable finish is constructed from SUS 304 stainless steel, featuring upgraded craftsmanship, and has undergone rigorous falling abrasive and salt spray tests to ensure longevity and resistance to wear.*

## Product Dimensions

# Product Size

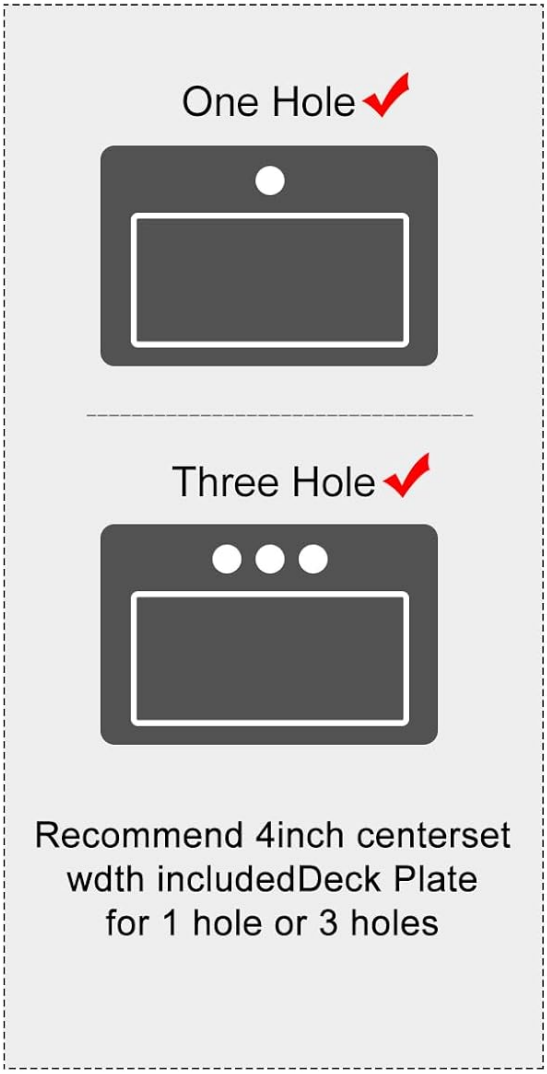





*Detailed dimensions of the faucet, including overall height, spout reach, and deck plate measurements for both 1-hole and 3-hole sink configurations.*

## Setup and Installation

Follow these steps to properly install your VOTON bathroom faucet.

### Before You Begin

- Ensure all package contents are present and undamaged.
- Gather necessary tools: adjustable wrench, screwdriver, plumber's putty or silicone sealant (not included).
- Turn off the hot and cold water supply to the sink at the shut-off valves.

### Installation Steps

1. **Prepare the Sink:** If your sink has three holes, place the deck plate over the holes. For a single-hole sink, the deck plate is optional.
2. **Install the Faucet:** Insert the threaded shank of the faucet body through the center hole of the sink (and deck plate if used).
3. **Secure the Faucet:** From underneath the sink, slide the rubber washer, then the metal washer, and finally the mounting nut onto the threaded shank. Tighten the mounting nut securely using a screwdriver to fasten the bolts, ensuring the faucet is stable and centered.
4. **Connect Supply Lines:** Attach the hot and cold water supply lines to the corresponding threaded connections on the bottom of the faucet. Hand-tighten first, then use a wrench for a snug fit.
5. **Connect to Water Supply:** Connect the other ends of the supply lines to the hot and cold water supply valves. Use thread seal tape on the valve threads if necessary, and tighten with a wrench.
6. **Check for Leaks:** Slowly turn on the hot and cold water supply valves. Inspect all connections for any signs of leaks. Tighten any leaking connections as needed.
7. **Flush the Faucet:** Remove the aerator from the spout. Turn on the faucet to full hot and cold positions to flush out any debris from the lines. Run water for a few minutes. Turn off the faucet and reinstall the aerator.

### Installation Video Guide

Your browser does not support the video tag.


*This video provides a visual guide to the installation process of the VOTON bathroom faucet, demonstrating each step from preparing the sink to connecting the supply lines and testing for leaks.*

## Operating Instructions

The VOTON V-1538I faucet features a single lever handle for convenient control of water flow and temperature.

- To turn the water on, lift the handle upwards.
- To adjust the water temperature, move the handle to the left for hot water or to the right for cold water.
- To control the water flow, adjust the height of the handle.
- To turn the water off, push the handle downwards to its original position.

### Handle Operation

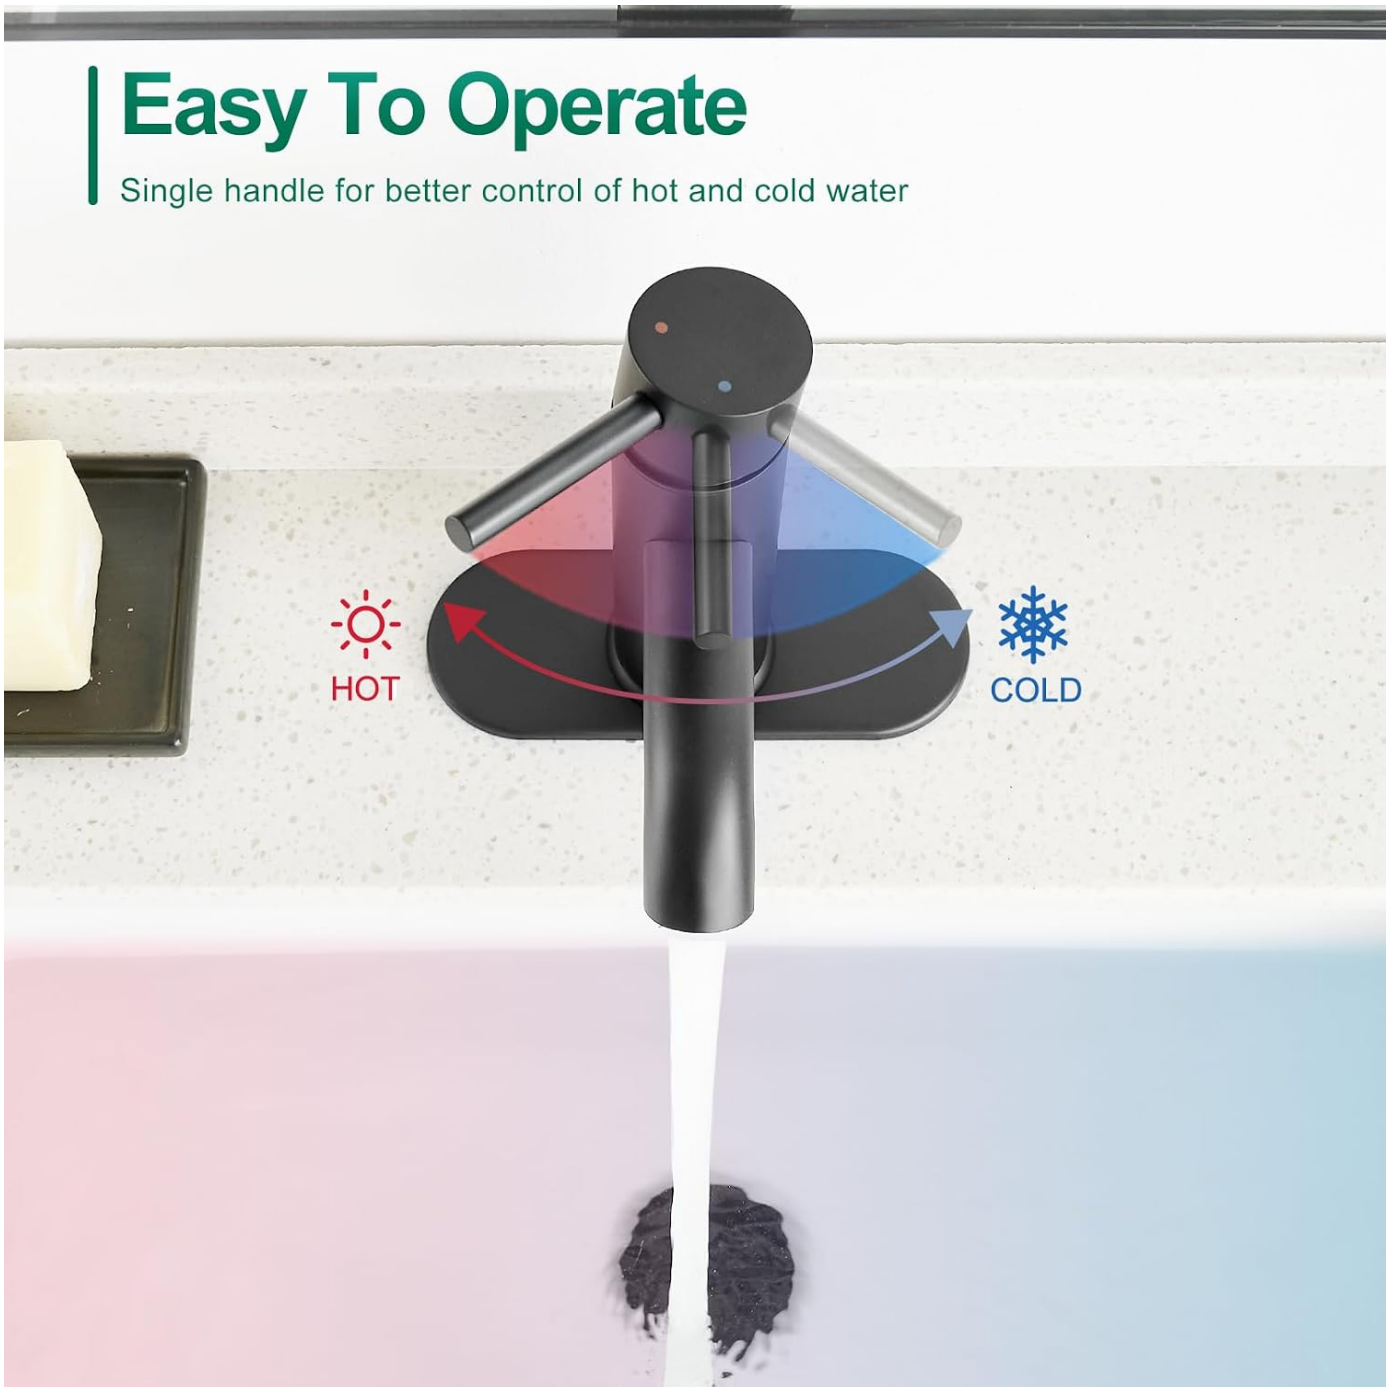


*Visual representation of the single handle's movement to control both hot and cold water flow.*

## Operation Demonstration Video

Your browser does not support the video tag.

*This video demonstrates the smooth operation of the single handle to adjust water temperature and flow, showcasing the faucet's functionality.*

## Maintenance and Care

Proper care will ensure the longevity and appearance of your VOTON faucet.

- **Cleaning:** Clean the faucet regularly with a soft, damp cloth and mild soap. Rinse thoroughly with clean water and dry with a soft towel to prevent water spots.

- **Avoid Harsh Cleaners:** Do not use abrasive cleaners, harsh chemicals, ammonia-based products, or scouring pads, as these can damage the matte black finish and void the warranty.
- **Aerator Maintenance:** Periodically unscrew the aerator from the spout and clean any mineral deposits or debris. Rinse it under running water and reattach it securely.
- **Leak Checks:** Regularly check all connections for any signs of leaks and tighten if necessary.

## Troubleshooting

If you encounter any issues with your faucet, refer to the table below for common problems and solutions.

| Problem | Possible Cause | Solution |
|---|---|---|
| Low Water Flow | Partially closed water supply valves, clogged aerator, kinked supply lines. | Ensure water supply valves are fully open. Clean or replace the aerator. Straighten any kinks in the supply lines. |
| Leaks from Faucet Base | Loose mounting nut, improperly seated rubber washer. | Tighten the mounting nut securely from underneath the sink. Ensure the rubber washer is correctly positioned. |
| Leaks from Supply Line Connections | Loose connections, missing or improperly applied thread seal tape. | Tighten the supply line connections with a wrench. Apply thread seal tape if not already used, and re-tighten. |
| Incorrect Water Temperature | Hot and cold supply lines reversed, water heater issue. | Verify that hot and cold supply lines are connected to the correct valves. Check your water heater settings. |

## Warranty and Support

VOTON stands behind the quality of its products. For specific warranty information, please refer to the documentation included with your purchase or visit the official VOTON website. If you require technical assistance, replacement parts, or have any questions not covered in this manual, please contact VOTON customer service through the contact information provided on your purchase receipt or the brand's official channels.

© 2026 VOTON. All rights reserved.

### Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

**Name**

Anonymous

**Email**

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

**Question**

Example: How do I reset this device or fix this error?

**Details**

Model number, symptoms, what you tried, or the section of the manual you are using.

**Submit question**

---

**Open the live page**

**https://manuals.plus/asin/B086TV14M9**

More documents and user manuals: **https://manuals.plus/**